

Motor Control & Protection

Contactor



Page C02
CJX2s
AC Contactor(9-95A)



Page C09
CJX2s



Page C14
CJX2s-N(CJX2i-N)
Mechanical Interlocking
Contactor



Page C15
CJX2i
AC Contactor(9-95A)



Page C20
YCX2s



Page C23
CJX2-D
AC Contactor(9-95A)



Page C31
CJ19i(CJ19s)
Contactor for Capacitor
Switching



Page C34
CJ19
Contactor for Capacitor
Switching



Page C36
CJX2-Z
DC coil AC Contactor



Page C38
CJX2-F
AC Contactor(115-800A)



Page C38
CJX2-FB
AC Contactor (115-800A)



Page C42
CJX2-F-N
Mechanical Interlocking
Contactor (115-800A)



Page C43
CKJ5
Vacuum AC Contactor
(125-630A)



Page C46
YCC6



Page C52
YCMD7



Page C56
CJX2s-M
AC Contactor



Page C62
YCK



Page C66
CJX2-D170

Motor Control & Protection

Thermal relay



Page C68
JR28s
(0.1–630A)



Page C68
JR28
(0.1–630A)

Starter



Page C73
YCQ7
Magnetic Starter
(0.1–80A)



Page C77
YCQD7
Integrated star delta starter
Ie(AC -3): 65–110A
Ue: 380V/400V



Page C83
YCQJ7
Motor Controller Le
(0.72–38A)



Page C87
LE1
Magnetic Starter
(0.1–80A)



Page C90
YCP5
Motor Starter
(0.1–80A)



Page C95
YCP6
Motor Starter
(0.1–80A)



Page C102
YCP7
Motor Starter
(0.1–0.16A)

Variable frequency drive



Page C109
YCB1000
Normal type
(0.75–500kW)



Page C114
YCB3000
Normal type
(0.75–1000kW)



Page C121
YCB600
Mini type
(0.4–5.5kW)

Soft starter



Page C130
YCQR2
5.5–600kW



Page C134
YCQR7
(18.5–115kW)




Page C139
YCQR7-G



Page C142
YCQR8

CJX2s Series


AC Contactor

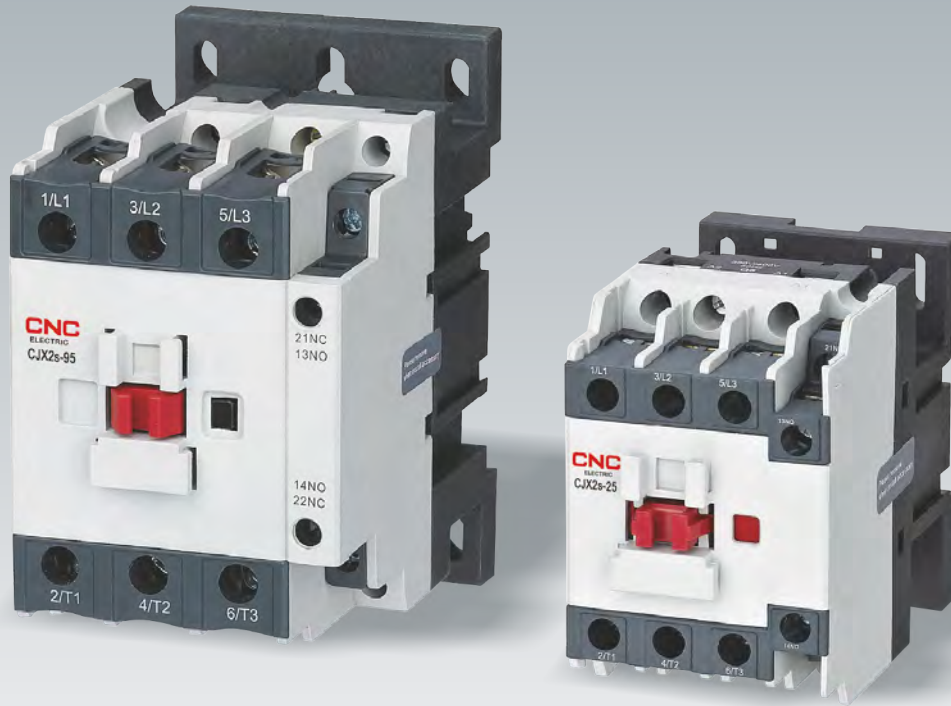

- More auxiliary contacts
- Suitable for larger voltage fluctuation
- Super environment adaptability

CJX2s AC Contactor

Overview

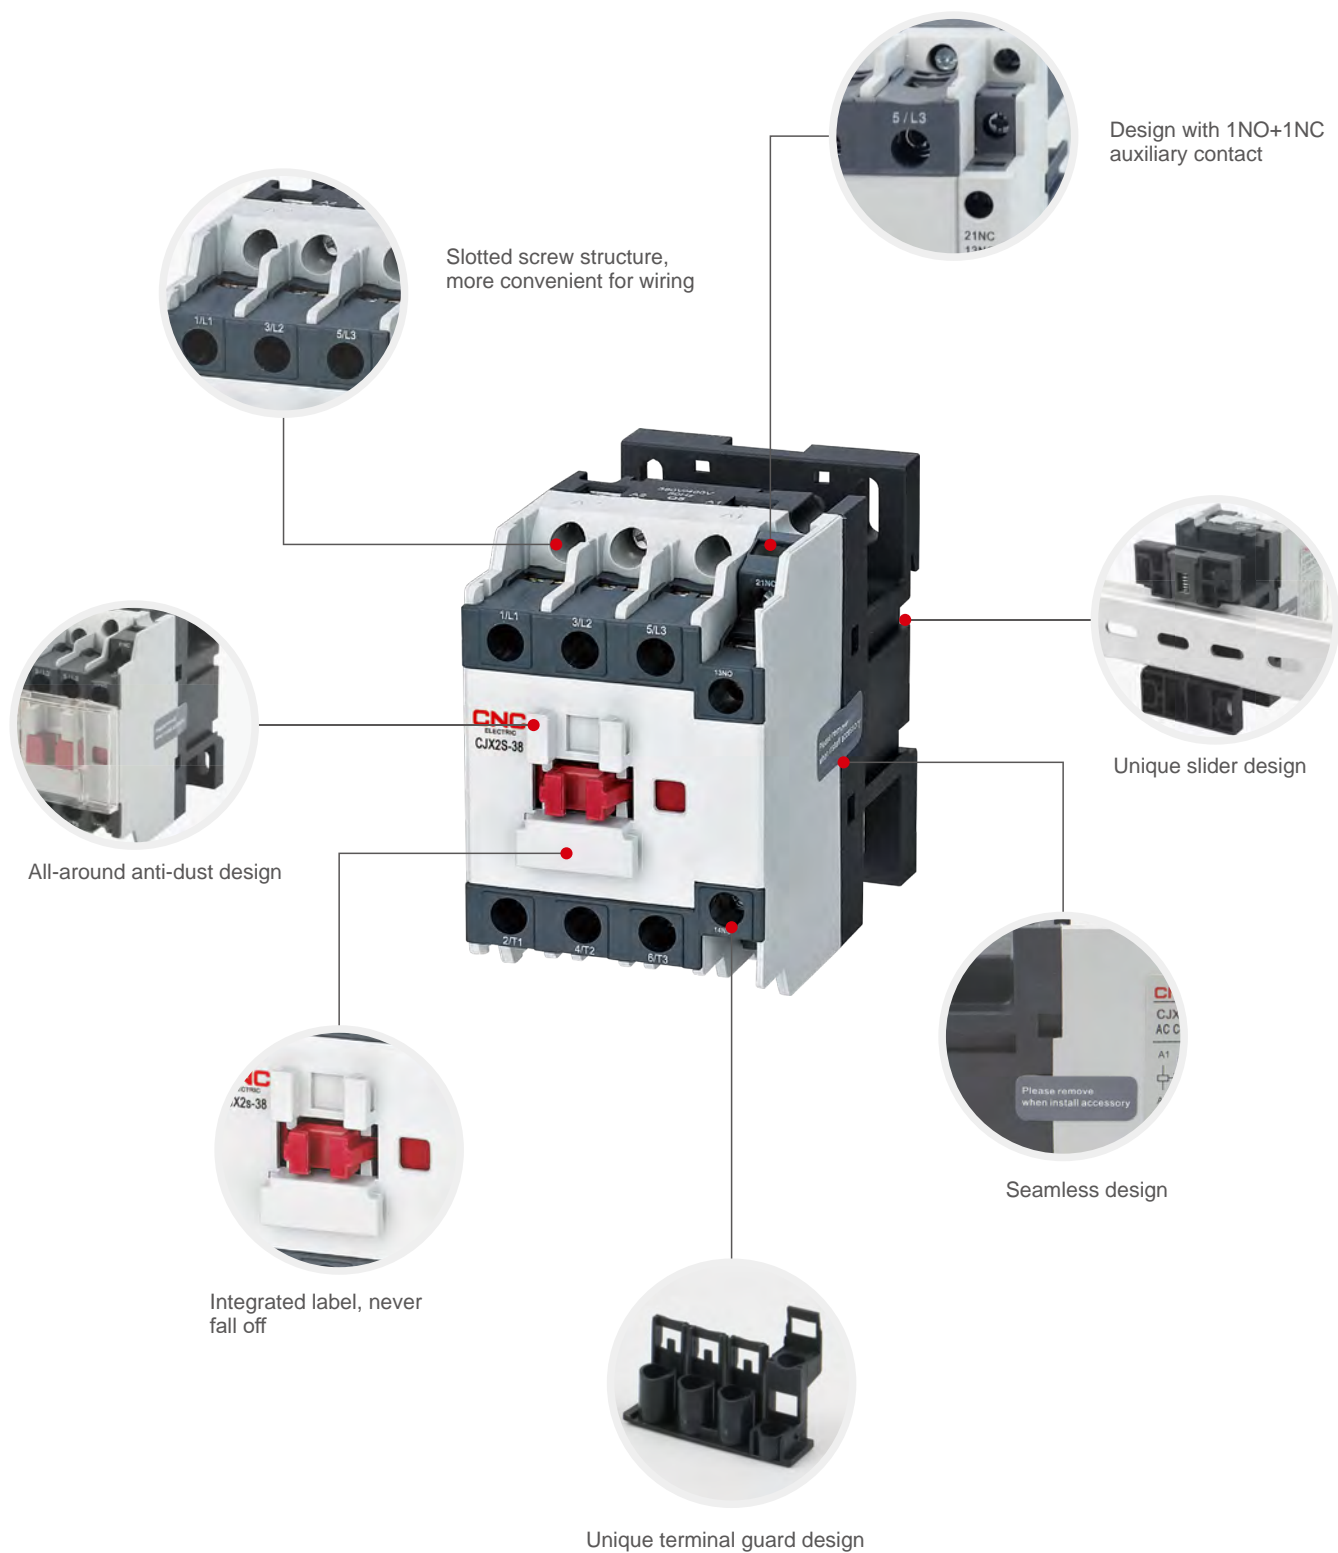

Motor Control & Protection

CJX2s AC Contactor



General

CJX2s series AC Contactor with artistic appearance and compact structure is suitable for using starting & controlling the AC motor frequently, switching on and off the circuit at a long distance. It is used in combination with thermal relay to compose a magnetic motor starter.

Certification:CE, CB, TUV.

- Rated operation current(Ie): 9-110A
- Rated operation voltage(Ue): 220V~690V
- Rated insulation voltage: 690V
- Poles: 3P
- Auxiliary contacts: 1NO+1NC;
- Installation: Din rail and screw installation
- Standard: IEC 60947-1, IEC 60947-4-1


Operating conditions

Type	Operating and Installation Conditions
Installation category	III
Pollution level	3
Protection degree	CJX2s-09~38: IP20; CJX2s-40~95: CJX2s-110 IP10
Ambient temperature	limit of temperature: -35°C~+70°C, normal temperature: -5°C~+40°C, The average no more than +35°C within 24 hours.
Altitude	≤2000m
Ambient temperature	The maximum temperature is 70 degrees, the relative humidity of the air does not exceed 50%, and the temperature below 50% can allow higher relative humidity. If the temperature is 20°C, the air relative humidity could up to 90%, Special measures should be taken for occasional condensation due to humidity changes.
Installation position	Inclination between installation surface and vertical surface should not exceed ±5°
Shock vibration	Products should be installed and used without significant shake, shock and vibration.

Motor Control & Protection

CJX2s AC Contactor

Technical data


Type	CJX2s-09	CJX2s-12	CJX2s-18	CJX2s-25	CJX2s-32	CJX2s-38	CJX2s-40	CJX2s-50	CJX2s-65	CJX2s-80	CJX2s-95	CJX2s-110		
Main circuit characteristic														
Poles	3P													
Rated insulation voltage(Ui)	V	690												
Rated operating voltage(Ue)	V	380/400, 660/690												
Rated thermal current(Ith),AC-1		20	20	32	40	50	50	50	60	80	125	125	140	
Rated operation current(Ie)	AC-3,380/400V	A	9	12	18	25	32	38	40	50	65	80	95	110
	AC-3,660/690V	A	6.6	8.9	12	18	22	22	34	39	42	49	49	49
	AC-4,380/400V	A	3.5	5	7.7	8.5	12	14	18.5	24	28	37	44	44
	AC-4,660/690V	A	1.5	2	3.8	4.4	7.5	8.9	9	12	14	17.3	21.3	21.3
Rated operational power(Pe)	AC-3,380/400V	kW	4	5.5	7.5	11	15	18.5	18.5	22	30	37	45	45
	AC-3,660/690V	kW	5.5	7.5	10	15	18.5	18.5	30	33	37	45	45	45
	AC-4,380/400V	kW	1.5	2.2	3.3	4	5.4	5.5	7.5	11	15	18.5	22	22
	AC-4,660/690V	kW	1.1	1.5	3	3.7	5.5	6	7.5	10	11	15	18.5	18.5
Mechanical life		1200			1000			900			650			
Electrical life	AC-3	10000 times	110			90			65					
	AC-4		22			17			11					
Frequency of operation	AC-3	times/hour	1200			600								
	AC-4		300			300								
Connecting capability of main circuit terminal														
Flexible wire	1 wire	mm ²	1...4			1.5...6			2.5...25			4...50		
No terminal	2 wire	mm ²	1...4			1.5...6			2.5...16			4...25		
Flexible wire	1 wire	mm ²	1...4			1...6			2.5...25			4...50		
With terminals	2 wire	mm ²	1...2.5			1...4			2.5...10			4...16		
Hard wire	1 wire	mm ²	1...4			1.5...6	1.5...10		2.5...25			4...50		
No terminal	2 wire	mm ²	1...4			1.5...			2.5...10			4...25		
Fastening torque		N·m	1.2			1.8			5			9		
Coil														
Rated control voltage(Us)	50Hz	V	24, 36, 48, 110, 127, 220/230, 240, 380/400, 415, 440											
	50/60Hz	V	24, 36, 48, 110, 127, 220/230, 240, 380/400, 415, 440											
Allowed control circuit voltage(Us)	Operation	V	Installation inclination angle ±22.5°: 85%~110%Us; Installation inclination angle±5°: 70%~120%											
	Release	V	Installation inclination angle ±22.5°: 20%~75%Us; Installation inclination angle±5°: 20%~65%											
Power consumption of coil	Actuation	VA	60			70			200			200		
	Keep	VA	6-9.5			6-9.5			15-20			15-20		
	Consumption	W	1-3			1-3			6-10			6-10		
Auxiliary contacts														
Auxiliary contacts specification	A	11												
Rated thermal current (Ith)	A	10												
Rated operating voltage (Ue)	AC	V	380											
	DC	V	220											
Rated control capacity	AC-15	VA	360											
	DC-13	W	33											
Certification	CE, TUV, CB													

Motor Control & Protection


CJX2s AC Contactor

Overall and mounting dimensions

CJX2s-09~38

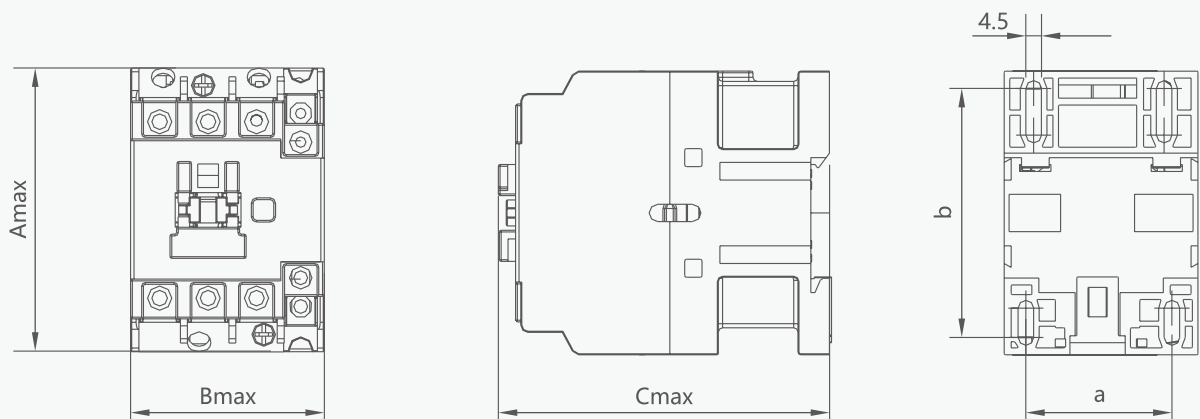


CJX2s-40~95

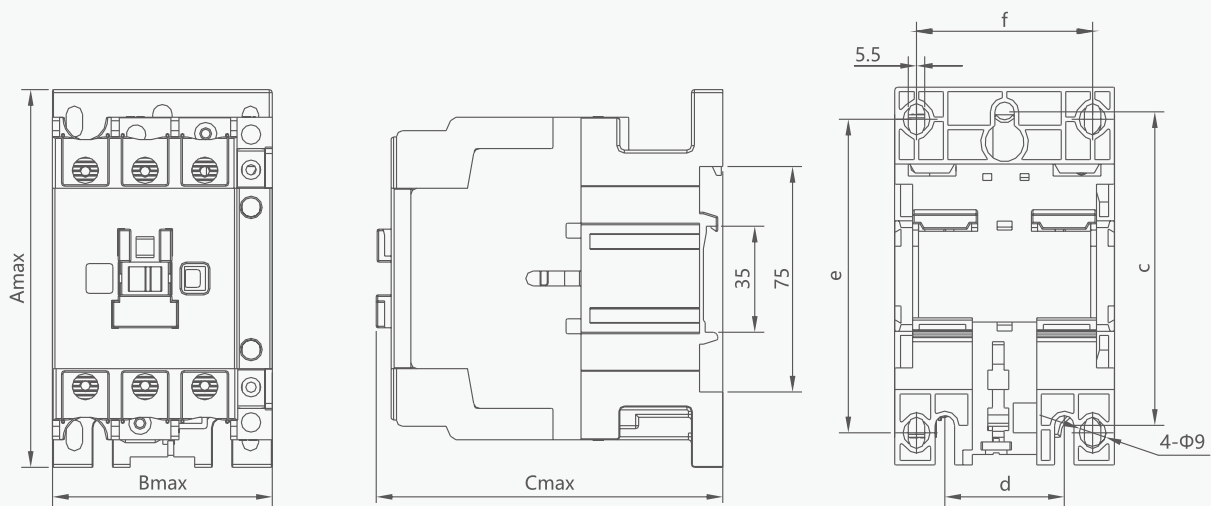

Motor Control & Protection

CJX2s AC Contactor

CJX2s-110

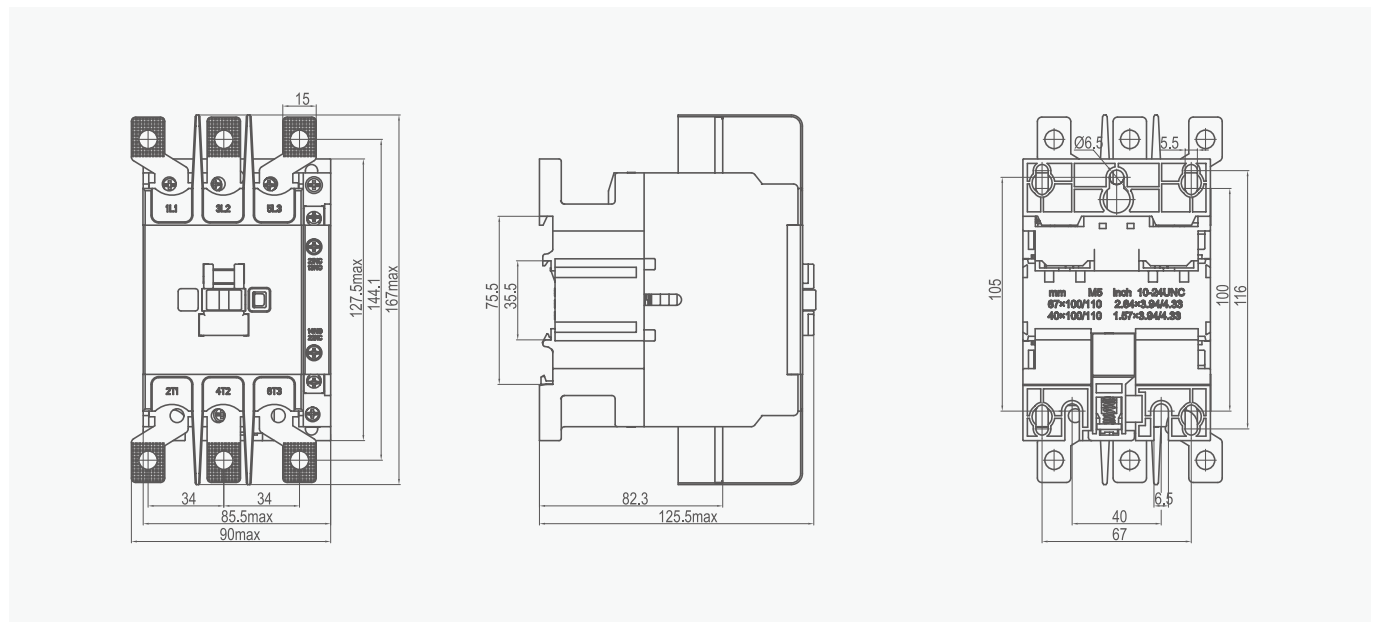





Type	Amax	Bmax	Cmax	a	b	c	d	e	f
CJX2s-09,12,18	74.5	45.5	85.5	35	50/60	-	-	-	-
CJX2s-25,32,38	86	56.5	97	40	50/70	-	-	-	-
CJX2s-40,50,65	127.5	74.5	117	-	-	105	40	100/110	59
CJX2s-80,95	127.5	85.5	125.5	-	-	105	40	100/110	67
CJX2s-110	167	90	125.5	-	-	-	-	-	-




Motor Control & Protection

CJX2s AC Contactor

F4-D, LA2-D, LA3-D Contact Block

Type	Product	Configuration of contacts	
		Number of N/O contact	Number of N/C contact
F4-DN20 F4-DN11 F4-DN02		2 1 0	0 1 2
F4-DN40 F4-DN31 F4-DN22 F4-DN13 F4-DN04		4 3 2 1 0	0 1 2 3 4
Type		Time-delay range	Number of time-delay contacts
LA2-DT0 LA2-DT2 LA2-DT4		0.1s~3s 0.1s~30s 10s~180s	NO+NC NO+NC NO+NC
LA3-DR0 LA3-DR2 LA3-DR4		0.1s~3s 0.1s~30s 10s~180s	NO+NC NO+NC NO+NC

LX1S Coil

Type	Product	Coil voltage Us(V) Frequency (Hz)	Coil voltage Us(V)													
			24	36	42	48	110	127	220	230	240	380	400	415	440	600
LX1S-D2 09-18		50Hz	B5	C5	D5	E5	F5	G5	M5	P5	U5	Q5	V5	N5	R5	X5
LX1S-D4 25-38		60Hz	B6	C6	D6	E6	F6	G6	M6	P6	U6	Q6	V6	N6	R6	X6
LX1S-D6 40-65		50/60Hz														
LX1S-D8 80-95																

Motor Control & Protection

CJX2s AC Contactor

Derived Products When The Contactor is Assembled With Following Accessory Module

Derived products	Contactor	Accessory module	Picture
Time-delay Contactor		+ 	→ 
Reversing Contactor		+ 	→ 
Magnetic Starter		+ 	→ 
Front Auxiliary Contact		+ 	→ 
Side Auxiliary Contact		+ 	→ 
Changeover Capacitor AC Contactor		+ 	→ 
Dust Cover		+ 	→ 

C

Motor Control & Protection

CJX2s AC Contactor



Large Current

General

CJX2s series AC Contactor with novel appearance and compact structure is suitable for using starting & controlling the AC motor frequently, switching on and off the circuit at a long distance. It is used in combination with thermal relay to compose a magnetic motor starter.

Standard: IEC 60947-1, IEC 60947-4-1.

Specifications

Rated operation current(Ie): 120-225A

Rated operation voltage(Ue): 220V~690V

Rated insulation voltage: 1000V

Poles: 3P

Installation: Screw installation


Type designation

Product name	Rated current	Breaking capacity	Breaking capacity
CJX2s	120	AC220V	50/60Hz
CJX2s	120 160 185 225	48,110,127,220,230, 240,380,400,415	50,60,50/60

Motor Control & Protection

CJX2s AC Contactor

Technical data

Model		CJX2s-120	CJX2s-160	CJX2s-185	CJX2s-225	
Appearance						
Frame grade		120-225				
Agreed free air heating current(A)		200	200	275	275	
Rated insulation voltage(V)		1000				
Rated impulse withstand voltage(kV)		12				
Poles		3P				
Rated operating current Ie(A)	AC-1	200	200	275	275	
	200V/230V	AC-3	120	160	185	225
		AC-4	120	160	160	185
	380V/400V	AC-3	120	160	185	225
		AC-4	120	160	160	185
	660V/690V	AC-3	86	107	107	118
		AC-4	86	107	107	107
	Rated control power	AC-3(kW)	200V/230V	37	45	55
380V/400V			55	75	90	110
660V/690V			80	100	100	110
Electrical life (10,000 times)	AC-3	120				
Electrical life (10,000 times)		600				
Main contact structure		3NO				
Number of auxiliary contacts		2NO+2NC				


Control circuit		Model	CJX2s-120	CJX2s-160	CJX2s-185	CJX2s-225
Main circuit wiring	Cable connection (mm ²)	Prefabricated soft wire	1	10~150		-
			2	10~75		-
		Hard wire	1	10~150		50~240
			2	10~75		50~240
	Fastening screw size			M6	M8	M10
	Fastening torque((N·m))			10		4
Control circuit connection	Cable connection (mm ²)	Prefabricated soft wire	1	1~4		
			2	1~2.5		
		Hard wire	1	1~4		
			2	1~4		
	Fastening screw size			M3.5		
	Fastening torque((N·m))			1.2		
Operating range		Pull-in	(75%~120%)Us		(75%~120%)Us	
		Release	(20%~70%)Us		(20%~70%)Us	

Motor Control & Protection

CJX2s AC Contactor

Overall and mounting dimensions

C

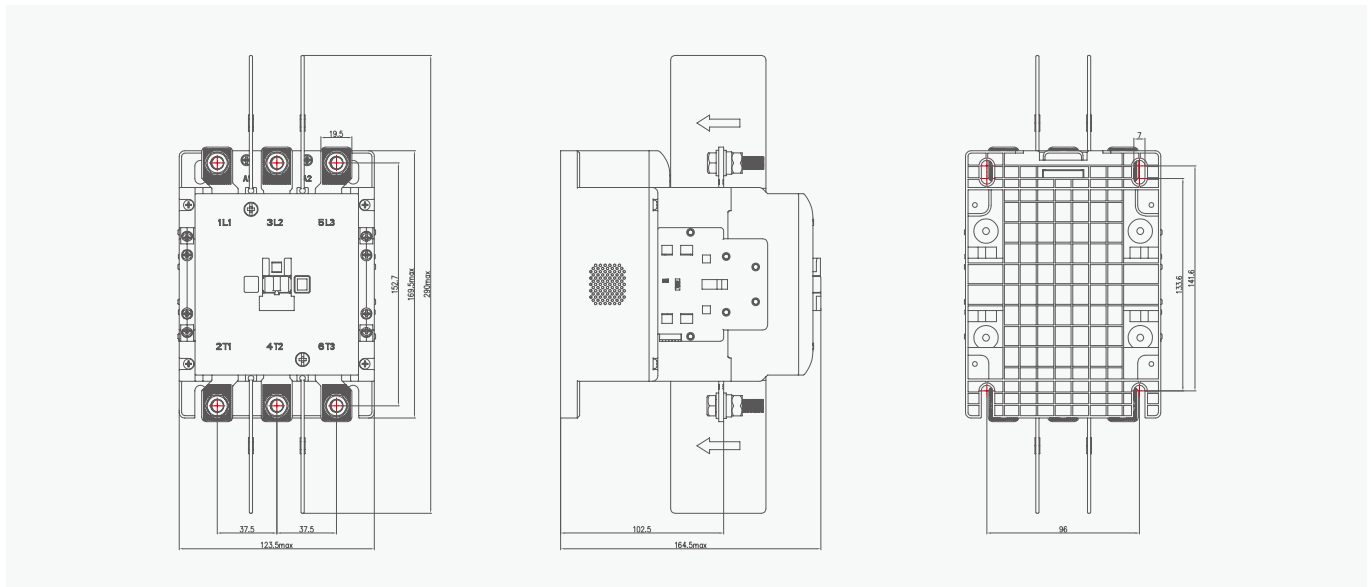


Type	Amax	Bmax	Cmax	a	b	c	d	e	f
CJX2s-120-225	169.5	123.5	164.5	96±0.5	133.6±0.8	-	-	-	-
	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-

Motor Control & Protection



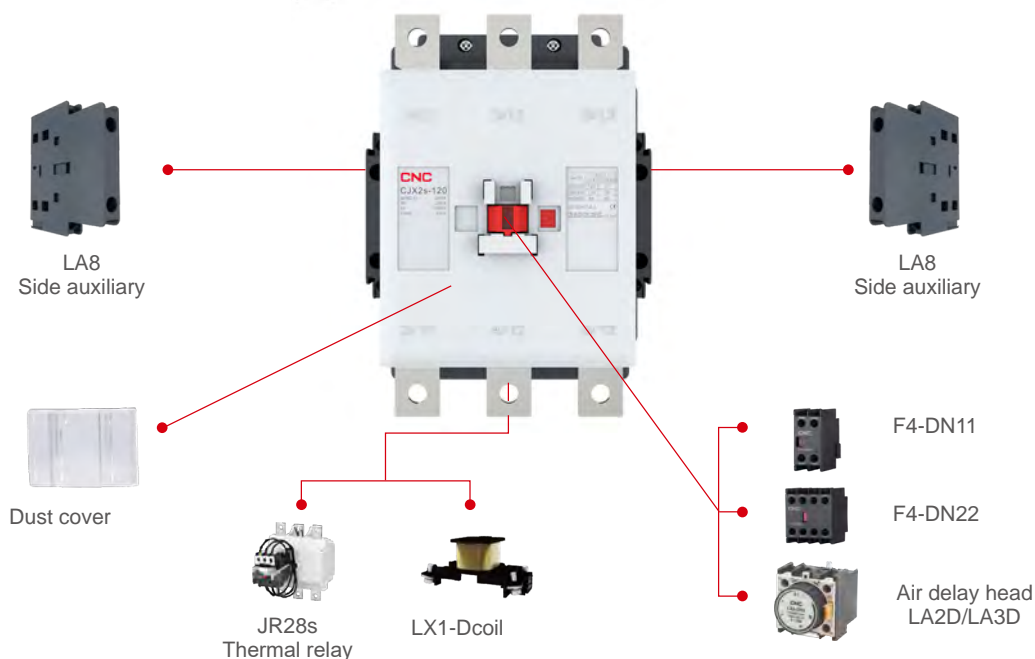

CJX2s AC Contactor

Complete accessories



Standard two LA8 Side auxiliary: To realize 2NO + 2NC auxiliary requirements, and top auxiliary can be configured as needed.

F4-D, LA2-D, LA3-D Contact Block


Type	Product	Configuration of contacts	
		Number of N/O contact	Number of N/C contact
F4-DN20 F4-DN11 F4-DN02		2 1 0	0 1 2
F4-DN40 F4-DN31 F4-DN22 F4-DN13 F4-DN04		4 3 2 1 0	0 1 2 3 4
Type		Time-delay range	Number of time-delay contacts
LA2-DT0 LA2-DT2 LA2-DT4		0.1s~3s 0.1s~30s 10s~180s	NO+NC NO+NC NO+NC
LA3-DR0 LA3-DR2 LA3-DR4		0.1s~3s 0.1s~30s 10s~180s	NO+NC NO+NC NO+NC




Motor Control & Protection

CJX2s AC Contactor


Wiring diagram

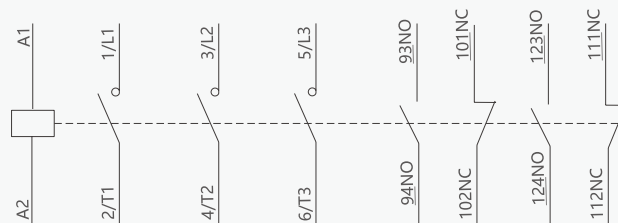


CJX2s-120-225




F4-DN20




F4-DN11




F4-DN02




F4-DN40




F4-DN31



F4-DN22



F4-DN13



F4-DN04

Motor Control & Protection

CJX2s-N(CJX2i-N) Mechanical Interlocking Contactor



CJX2s-N




CJX2i-N

Technical data


Type	Rated operation current(Ie)(A)	Rated thermal current(Ith)(A)	Rated operational power in category AC-3 (kW)	
			380V	660V
CJX2s(CJX2i)-09N	9	20	4	5.5
CJX2s(CJX2i)-12N	12	20	5.5	7.5
CJX2s(CJX2i)-18N	18	32	7.5	10
CJX2s(CJX2i)-25N	25	40	11	15
CJX2s(CJX2i)-32N	32	50	15	18.5
CJX2s(CJX2i)-38N	38	50	15	18.5
CJX2s(CJX2i)-40N	40	50	18.5	30
CJX2s(CJX2i)-50N	50	60	22	33
CJX2s(CJX2i)-65N	65	80	30	37
CJX2s(CJX2i)-80N	80	95	37	45
CJX2s(CJX2i)-95N	95	95	45	55

Overall and mounting dimensions(mm)

CJX2s(CJX2i)-09~38N

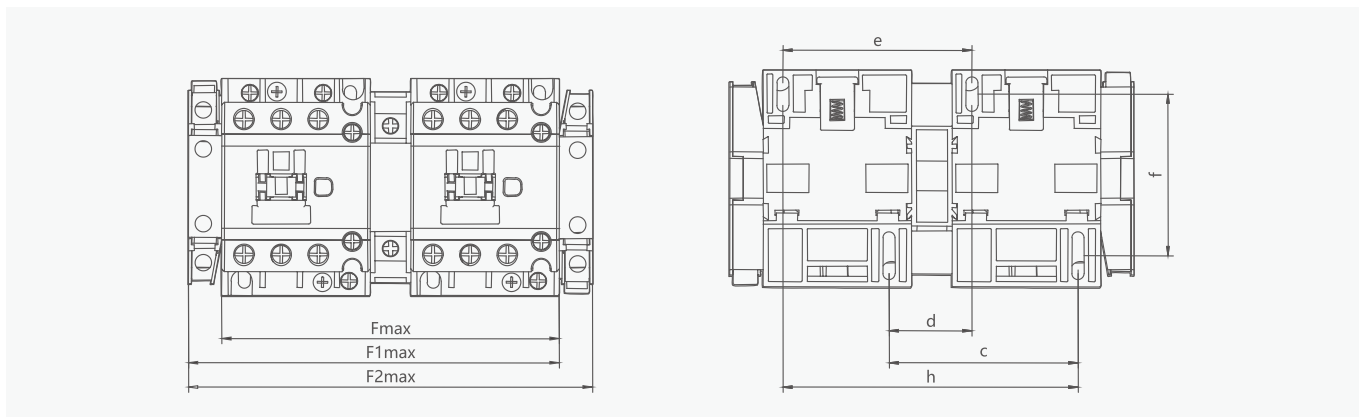

CJX2s(CJX2i)-40~95N

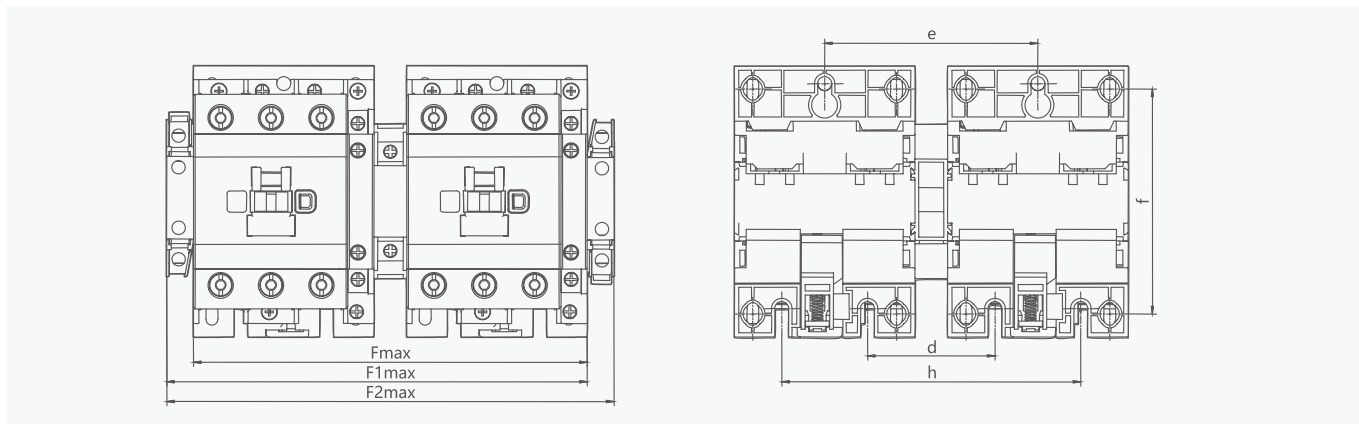

Type	Fmax	F1max	F2max	c	d	e	f	h
CJX2s(CJX2i)-09N, 12N, 18N	107	120	131	60	25	60	50/60	95
CJX2s(CJX2i)-25N, 32N, 38N	129	142	153	71	31.5	71	50/60	111.5
CJX2s(CJX2i)-40N, 50N, 65N	163	180	193	-	50	90	100/110	130
CJX2s(CJX2i)-80N, 95N	186	202	215	-	60	100	100/110	140

Motor Control & Protection

CJX2i AC Contactor



General

CJX2i series AC Contactor with novel appearance and compact structure is suitable for using starting & controlling the AC motor frequently, switching on and off the circuit at a long distance. It is used in combination with thermal relay to compose a magnetic motor starter.

Certification:CE, CB, TUV.


- Rated operation current(Ie): 9-110A;
- Rated operation voltage(Ue): 220V~690V;
- Rated insulation voltage: 690V;
- Poles: 3P;
- Auxiliary contacts: 1NO+1NC;
- Installation: Din rail and screw installation
- Standard: IEC 60947-1, IEC 60947-4-1.

Operating conditions

Type	Operating and Installation Conditions
Installation category	III
Pollution level	3
Protection degree	CJX2i-09~38: IP20; CJX2i-40~95: CJX2i-110 IP10
Ambient temperature	limit of temperature: -35°C~+70°C, normal temperature: -5°C~+40°C, The average no more than +35°C within 24 hours.
Altitude	≤2000m
Ambient temperature	The maximum temperature is 70 degrees, the relative humidity of the air does not exceed 50%, and the temperature below 50% can allow higher relative humidity. If the temperature is 20°C, the air relative humidity could up to 90%, Special measures should be taken for occasional condensation due to humidity changes.
Installation position	Inclination between installation surface and vertical surface should not exceed ±5°
Shock vibration	Products should be installed and used without significant shake, shock and vibration.

Motor Control & Protection

CJX2i AC Contactor


Appearance														
Type			CJX2i-09	CJX2i-12	CJX2i-18	CJX2i-25	CJX2i-32	CJX2i-38	CJX2i-40	CJX2i-50	CJX2i-65	CJX2i-80	CJX2i-95	CJX2i-110
Main circuit characteristic														
Poles			3P											
Rated insulation voltage(Ui)		V	690											
Rated operating voltage(Ue)		V	380/400, 660/690											
Rated thermal current(Ith), AC-1			20	20	32	40	50	50	60	80	80	125	125	140
Rated operation current(Ie)	AC-3,380/400V	A	9	12	18	25	32	38	40	50	65	80	95	110
	AC-3,660/690V	A	6.6	8.9	12	18	22	22	34	39	42	49	49	49
	AC-4,380/400V	A	3.5	5	7.7	8.5	12	14	18.5	24	28	37	44	44
	AC-4,660/690V	A	1.5	2	3.8	4.4	7.5	8.9	9	12	14	17.3	21.3	21.3
Rated operational power(Pe)	AC-3,380/400V	kW	4	5.5	7.5	11	15	18.5	18.5	22	30	37	45	45
	AC-3,660/690V	kW	5.5	7.5	10	15	18.5	18.5	30	33	37	45	45	45
	AC-4,380/400V	kW	1.5	2.2	3.3	4	5.4	5.5	7.5	11	15	18.5	22	22
	AC-4,660/690V	kW	1.1	1.5	3	3.7	5.5	6	7.5	10	11	15	18.5	18.5
Mechanical life			1200			1000			900			650		
Electrical life	AC-3	10000 times	110			90			65					
	AC-4		22			22			17			11		
Frequency of peration	AC-3	times/hour	1200			600								
	AC-4		300			300								
Connecting capability of main circuit terminal														
Flexible wire	1 wire	mm ²	1...4			1.5...6			2.5...25			4...50		
No terminal	2 wire	mm ²	1...4			1.5...6			2.5...16			4...25		
Flexible wire	1 wire	mm ²	1...4			1...6			2.5...25			4...50		
With terminals	2 wire	mm ²	1...2.5			1...4			2.5...10			4...16		
Hard wire	1 wire	mm ²	1...4			1.5...6	1.5...10		2.5...25			4...50		
No terminal	2 wire	mm ²	1...4			1.5...			2.5...10			4...25		
Fastening torque		N·m	1.2			1.8			5			9		
Coil														
Rated control voltage(Us)	50Hz		24,36,48,110,127,220/230,240,380/400,415,440											
	50/60Hz		24,36,48,110,127,220/230,240,380/400,415,440											
Allowed control circuit voltage(Us)	Operation		Installation inclination angle $\pm 22.5^\circ$: 85%~110%Us; Installation inclination angle $\pm 5^\circ$: 70%~120%											
	Release		Installation inclination angle $\pm 22.5^\circ$: 20%~75%Us; Installation inclination angle $\pm 5^\circ$: 20%~65%											
Power consumption of coil	Actuation		60			70			200			200		
	Keep		6-9.5			6-9.5			15-20			15-20		
	Consumption		1-3			1-3			6-10			6-10		
Auxiliary contacts														
Auxiliary contacts specification		A	11											
Rated thermal current (Ith)		A	10											
Rated operating voltage (Ue)	AC	V	380											
	DC	V	220											
Rated control capacit	AC-15	VA	360											
	DC-13	W	33											
Certification			CE, TUV, CB											

Motor Control & Protection


CJX2i AC Contactor

Overall and mounting dimensions(mm)

CJX2i-09~38

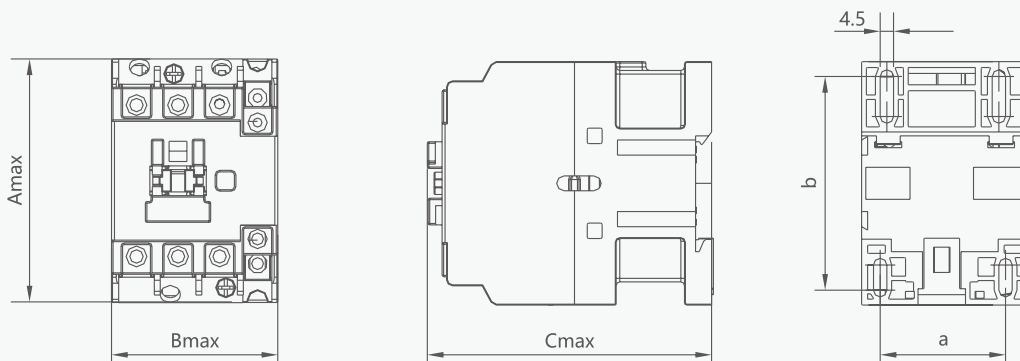


CJX2i-40~95

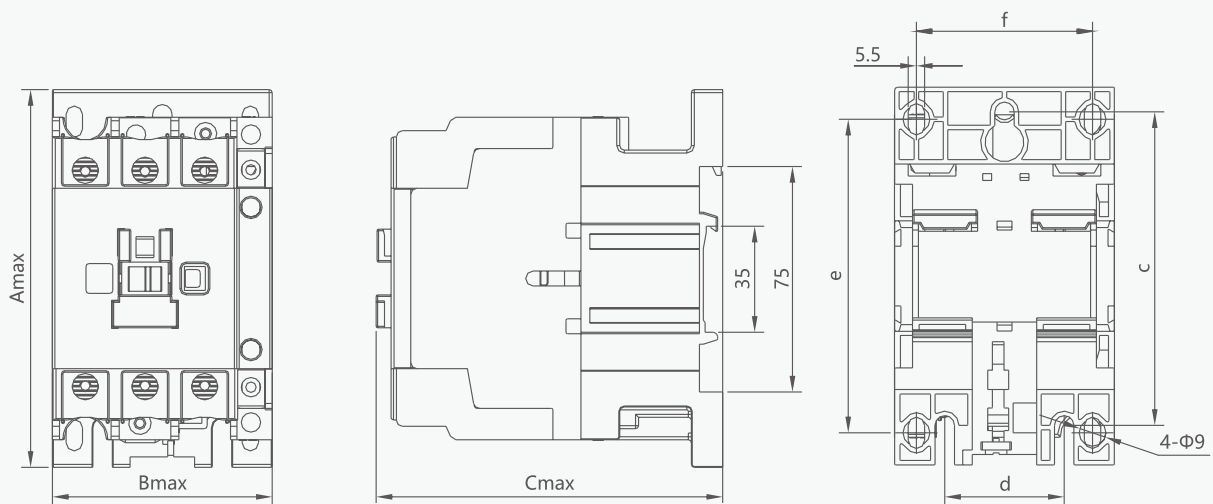

Motor Control & Protection

CJX2i AC Contactor

CJX2i-110

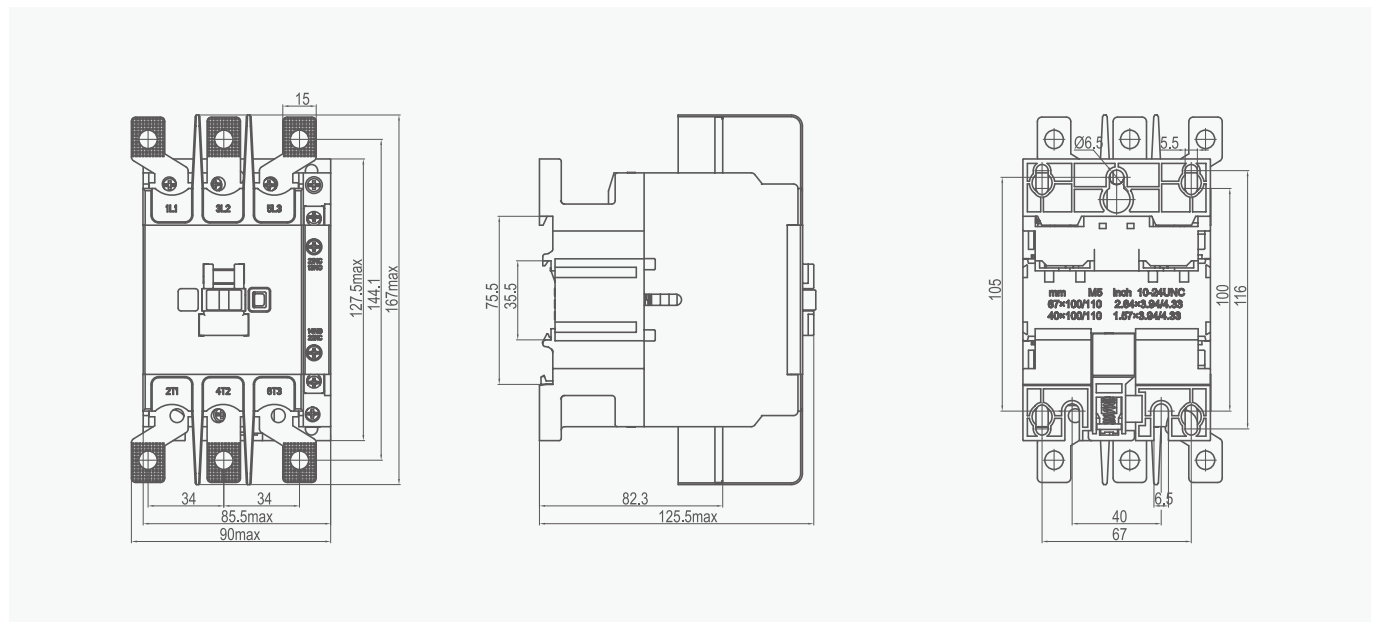

Type	Amax	Bmax	Cmax	a	b	c	d	e	f
CJX2i-09, 12, 18	74.5	45.5	85.5	35	50/60	-	-	-	-
CJX2i-25, 32, 38	83	56.5	97	40	50/70	-	-	-	-
CJX2i-40, 50, 65	127.5	74.5	117	-	-	105	40	100/110	59
CJX2i-80, 95	127.5	85.5	125.5	-	-	105	40	100/110	67
CJX2i-110	167	90	125.5	-	-	-	-	-	-



Motor Control & Protection

CJX2i AC Contactor

Derived Products When The Contactor is Assembled With Following Accessory Module

Derived products	Contactor	Accessorial modular	Picture
Time-delay contactor		+ 	→ 
Reversing contactor		+ 	→ 
Magnetic starter		+ 	→ 
Front auxiliary contact		+ 	→ 
Side auxiliarycontact		+ 	→ 
Changeover capacitor AC contactor		+ 	→ 
dust cover		+ 	→ 

Motor Control & Protection

YCX2s AC Contactor



General

YCX2s series AC Contactor with novel appearance and compact structure is suitable for using starting & controlling the AC motor frequently, switching on and off the circuit at a long distance. It is used in combination with thermal relay to compose a magnetic motor starter.

Standard: IEC 60947-1, IEC 60947-4-1.

- Rated operation current(Ie): 9-32A
- Rated operation voltage(Ue):220V~690V
- Rated insulation voltage: 690V
- Poles: 2P
- Installation: Din rail and screw installation

Type designation

Company	AC contactor	Rated current of the main contact	Coil voltage
YC	X2s	09	220V

Operating conditions


Type Operating	Conditions
Installation category	III
Pollution degree	3
Certification	CE, CB, CCC, TUV
Protection degree	YCX2s-09~32:IP20(front side)
Ambient temperature	Limit of temperature: -35°C~+70°C; Normal temperature: -5°C~+40°C; The average no more than +35°C within 24 hours; If not in normal operating temperature range, please refer to "Instructions for abnormal environment".
Altitud	≤ 2000m
Ambient temperature	The maximum temperature of 70 degrees, the air relative humidity not exceed 50%,under lower temperature can allowfor higher relative humidity.If the temperature is 20°C, the air relative humidity could upto 90%,Special measures should be taken for occasional-condensation due to humidity changes.
Installation position	Inclination between installation surface and vertical surfaceshould not exceed +5°
Shock vibration	Products should be installed and used without significant-shake,shock and vibration place.

C

Motor Control & Protection

YCX2s AC Contactor

Specifications


Type			YCX2s-09	YCX2s-12	YCX2s-18	YCX2s-25	YCX2s-32
Main circuit characteristic							
Poles			2P				
Rated insulation voltage(Ui)		V	690				
Rated operating voltage(Ue)		V	380/400, 660/690				
Rated thermal current(Ith),AC-1			20	20	32	40	50
Rated operation current(Ie)	AC-3,380/400V	A	9	12	18	25	32
	AC-3,660/690V	A	6.6	8.9	12	18	22
	AC-4,380/400V	A	3.5	5	7.7	8.5	12
	AC-4,660/690V	A	1.5	2	3.8	4.4	7.5
Rated operational power(Pe)	AC-3,380/400V	kW	4	5.5	7.5	11	15
	AC-3,660/690V	kW	5.5	7.5	10	15	18.5
	AC-4,380/400V	kW	1.5	2.2	3.3	4	5.4
	AC-4,660/690V	kW	1.1	1.5	3	3.7	5.5
Mechanical life			1200			1000	
Electrical life	AC-3	10000 times	110			90	
	AC-4		22			22	
Frequency of operation	AC-3	times/hour	1200			600	
	AC-4		300			300	
Connecting capability of main circuit terminal							
Flexible wire	1 wire	mm ²	1...4			1.5...6	
No terminal	2 wire	mm ²	1...4			1.5...6	
Flexible wire	1 wire	mm ²	1...4			1...6	
With terminals	2 wire	mm ²	1...2.5			1...4	
Hard wire	1 wire	mm ²	1...4			1.5...6	1.5...10
No terminal	2 wire	mm ²	1...4			1.5...	
Fastening torque		N·m	1.2			1.8	
Coil							
Rated control voltage(Us)	50Hz	V	220				
	50/60Hz	V	220				
Allowed control circuit voltage(Us)	Operation	V	Installation inclination angle ±22.5°: 85%~110%Us; Installation inclination angle±5°: 70%~120%				
	Release	V	Installation inclination angle ±22.5°: 20%~75%Us; Installation inclination angle±5°: 20%~65%				
Power consumption of coil	Actuation	VA	60			70	
	Keep	VA	6-9.5			6-9.5	
	Consumption	W	1-3			1-3	

Motor Control & Protection


YCX2s AC Contactor

Overall and mounting dimensions(mm)

YCX2s-09~18

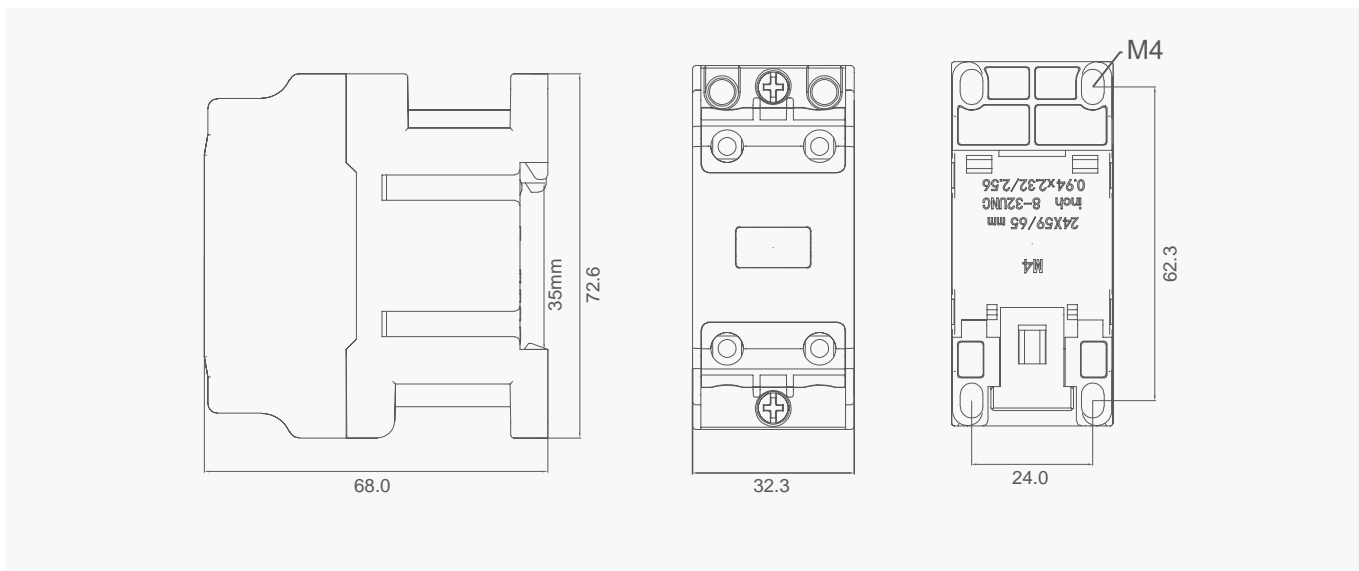

YCX2s-25~32

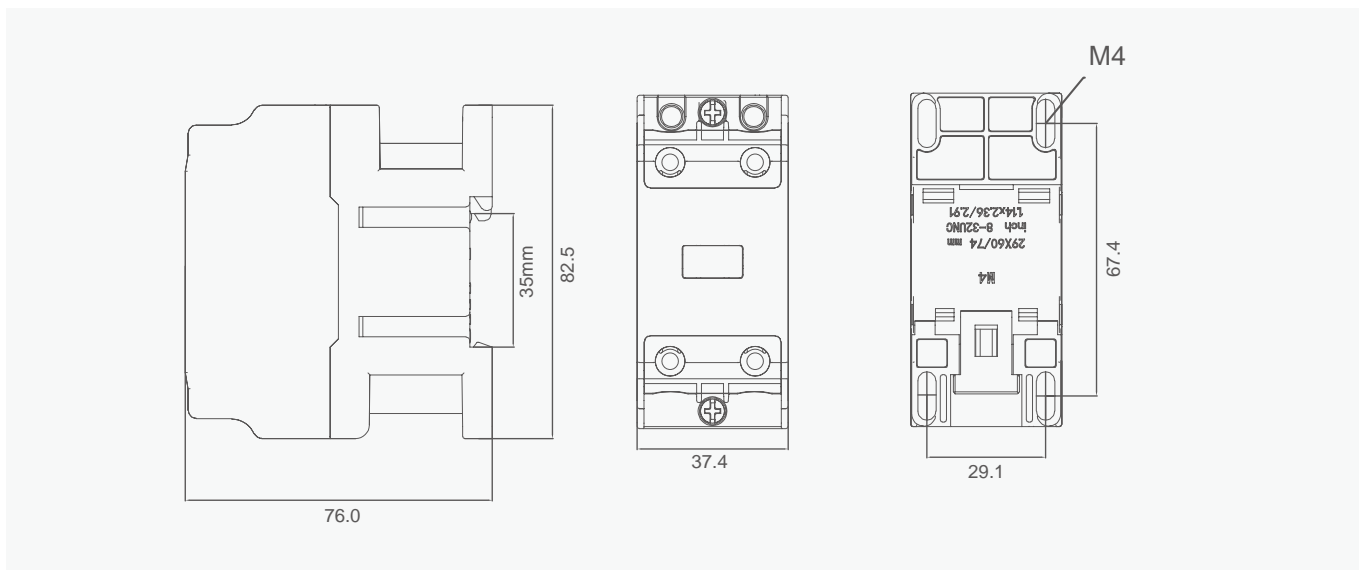

Motor Control & Protection

CJX2-D AC Contactor



General

CJX2-D series AC Contactor is suitable for those circuits whose rated voltage is up to 660V AC 50Hz or 60Hz, rated current is up to 95A, for making, breaking, frequently starting & controlling the AC motor. Combined with the auxiliary contact block, timer delay & machine-interlocking device etc, it becomes the delay contactor, mechanical interlocking contactor, star-delta starter. With the thermal relay, it is combined into the electromagnetic starter.

Standard: IEC 60947-4-1.

Type designation

CJX2 - 09 004 220V



AC contactor	Rated operational current	Main contact	Coil rated voltage
CJX2	09	004	220V
CJX2	9A, 12A, 25A, 40A, 50A, 65A, 80A, 95A	004:4P 4NO 008:4P 2NO/2NC	24V, 36V, 48V, 110V, 220V, 380V



Coil voltage of contactor and code

Coil voltage Us(V)	24	36	42	48	110	220	230	240	380	400	415	440	600
50Hz	B5	C5	D5	E5	F5	M5	P5	U5	Q5	V5	N5	R5	X5
60Hz	B6	C6	D6	E6	F6	M6	P6	U6	Q6	V6	N6	R6	X6
50/60Hz	B7	C7	D7	E7	F7	M7	P7	U7	Q7	V7	N7	R7	X7

Motor Control & Protection

CJX2-D AC Contactor

Type	Rated current (A)	Number of main contacts Normal open (NO)	Number of auxiliary contacts	
			Normal open (NO)	Normal close (NC)
CJX2-0910	9	3NO	1	0
CJX2-0901	9	3NO	0	1
CJX2-1210	12	3NO	1	0
CJX2-1201	12	3NO	0	1
CJX2-1810	18	3NO	1	0
CJX2-1801	18	3NO	0	1
CJX2-2510	25	3NO	1	0
CJX2-2501	25	3NO	0	1
CJX2-3210	32	3NO	1	0
CJX2-3201	32	3NO	0	1
CJX2-4011	40	3NO	1	1
CJX2-5011	50	3NO	1	1
CJX2-6511	65	3NO	1	1
CJX2-8011	80	3NO	1	1
CJX2-9511	95	3NO	1	1
CJX2-09004	9	4NO	0	0
CJX2-09008	9	2NO/2NC	0	0
CJX2-12004	12	4NO	0	0
CJX2-12008	12	2NO/2NC	0	0
CJX2-25004	25	4NO	0	0
CJX2-25008	25	2NO/2NC	0	0
CJX2-40004	40	4NO	0	0
CJX2-40008	40	2NO/2NC	0	0
CJX2-50004	50	4NO	0	0
CJX2-50008	50	2NO/2NC	0	0
CJX2-65004	65	4NO	0	0
CJX2-65008	65	2NO/2NC	0	0
CJX2-80004	80	4NO	0	0
CJX2-80008	80	2NO/2NC	0	0
CJX2-95004	95	4NO	0	0
CJX2-95008	95	2NO/2NC	0	0

C

Motor Control & Protection

CJX2-D AC Contactor

Technical data

Type		CJX2-D09	CJX2-D12	CJX2-D18	CJX2-D25	CJX2-D32	CJX2-D40	CJX2-D50	CJX2-D65	CJX2-D80	CJX2-D95	
Rated insulation voltage (Ui)		V	690									
Rated thermal current (Ith)		A	20	20	32	40	50	60	80	80	125	125
Rated operating current (Ie)	AC-3, 380V	A	9	12	18	25	32	40	50	65	80	95
	AC-3, 660V	A	6.6	8.9	12	18	21	34	39	42	49	55
	AC-4, 380V	A	3.5	5	7.7	8.5	12	18.5	24	28	37	41
	AC-4, 660V	A	1.5	2	3.8	4.4	7.5	9	12	14	17.3	21.3
Max. power of 3 phase motor controlled	AC-3, 220V	kW	2.2	3	4	5.5	7.5	11	15	18.5	22	25
	AC-3, 380V	kW	4	5.5	7.5	11	15	18.5	22	30	37	45
	AC-3, 660V	kW	5.5	7.5	10	15	18.5	30	33	37	45	55
Electrical life	AC-3	10000 t	100			80	80			60		
	AC-4	10000 t	20			20	15			10		
Mechanical life		10000 t	1000			800	800			600		
Operating frequency	AC-3		1200			600	600			600		
	AC-4		300			300	300			300		
Main contact structure		3 N.O., 4 N.O., 2 N.O. and 2 N.C										
Matching fuse type			RT16-20	RT16-20	RT16-32	RT16-40	RT16-50	RT16-63	RT16-80	RT16-80	RT16-100	RT16-125
Matching thermal relay type			JR28-25	JR28-25	JR28-25	JR28-25	JR28-36	JR28-93	JR28-93	JR28-93	JR28-93	JR28-93
Wiring capacity		mm ²	2.5	2.5	4	4	6	25	25	25	35	35(50)
Coil												
Control power voltage (Us)												
Rated control voltage(Us)		AC	V	24, 36, 48, 110, 127, 220/230, 240, 380/400, 415, 440								
Allowed control circuit voltage(Us)	Close	V	85%~110%Us									
	Open	V	20%~75%Us(AC)									
	Close	VA	70			110		200				
	Keeping	VA	8			11		20				
	Loss power	W	1.8~2.7			3~4		6~10				
Auxiliary contact												
Rated thermal current (Ith)		A	10									
Rated operating voltage (Ue)	AC-15	V	380									
	DC-13	V	220									
Rated control capacity	AC-15	VA	360									
	DC-13	W	33									


Note:3 pole is normal type, not remarked in the type name.

Motor Control & Protection

CJX2-D AC Contactor

Overall and mounting dimensions(mm)


Pic.1 CJX2-D09,12,18

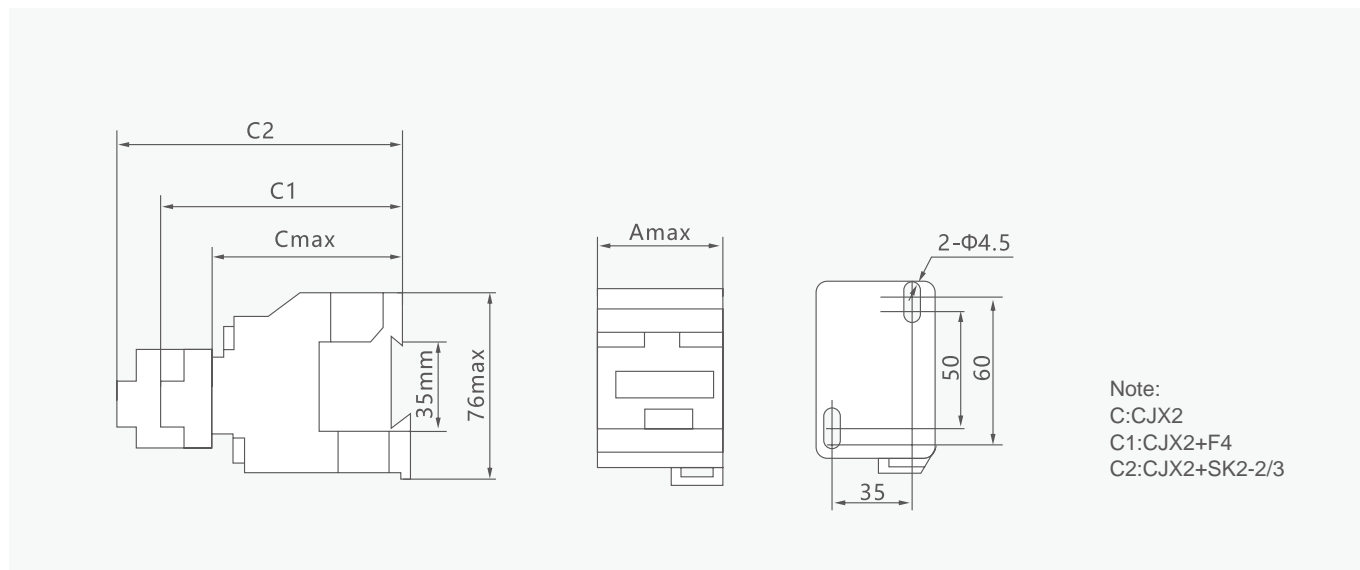

Unit: mm

Type	Amax	Cmax	C1	C2
CJX2-D09,12	47	82	115	134
CJX2-D18	47	87	120	139

Pic. 2 CJX2-D25,32

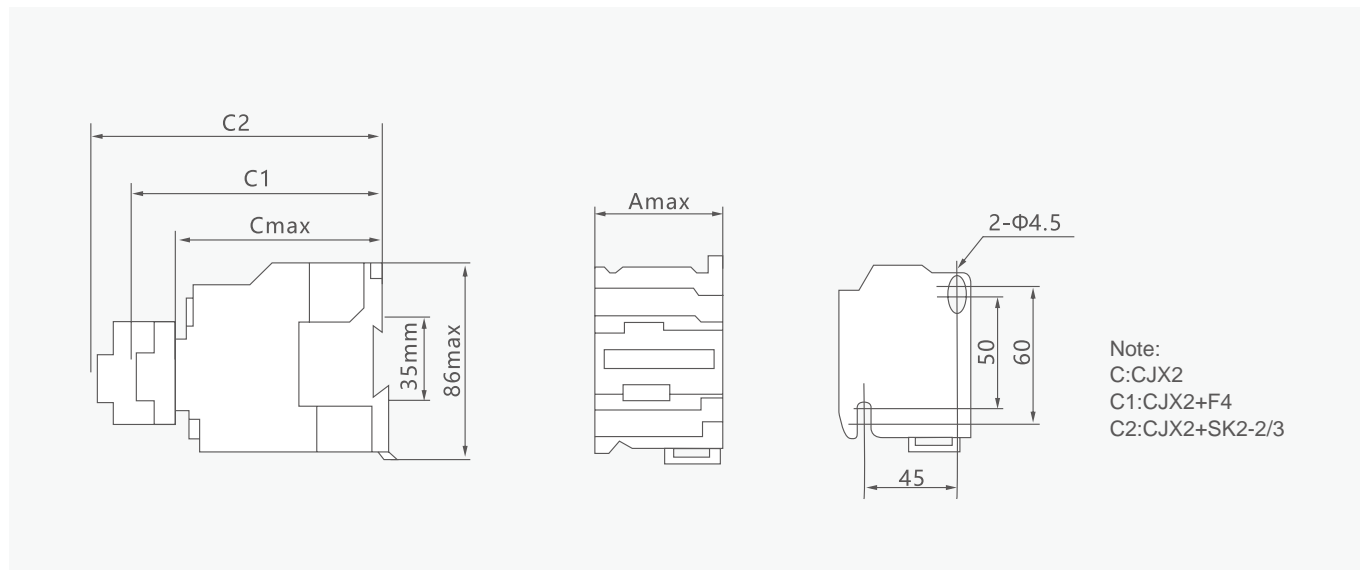


Unit: mm

Type	Amax	Cmax	C1	C2
CJX2-D25	57	95	130	149
CJX2-D32	57	100	135	154

Motor Control & Protection

CJX2-D AC Contactor

Pic. 3 CJX2-D40~95

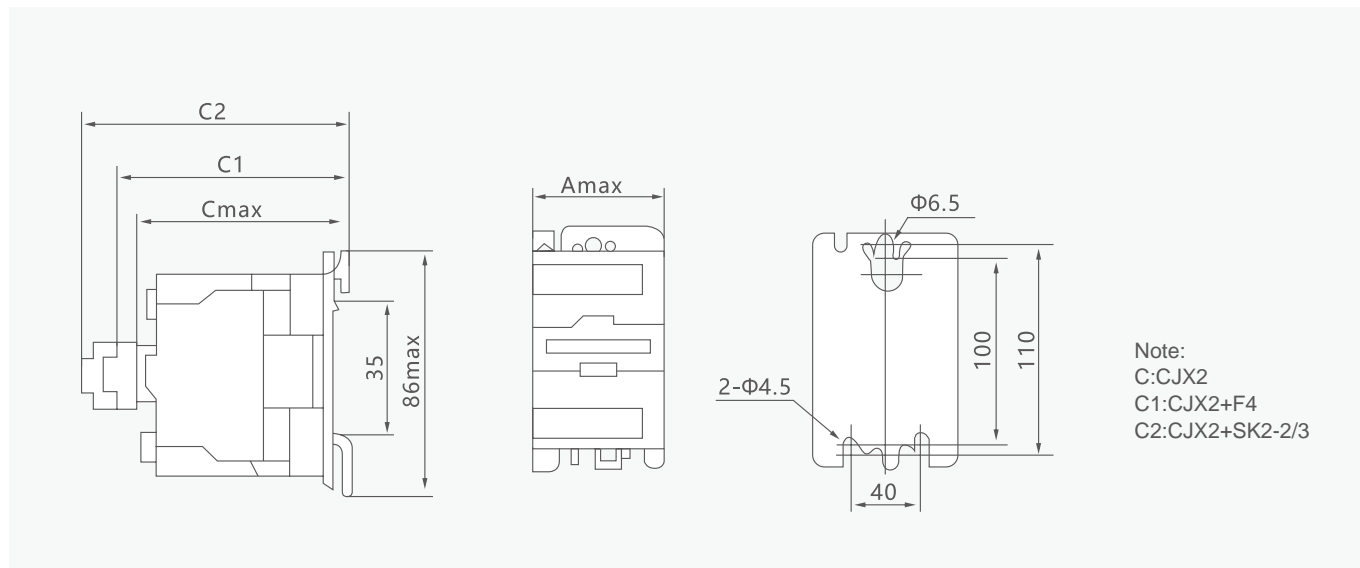

Unit: mm

Type	Amax	Cmax	C1	C2
CJX2-D40,50,65	79	116	149	168
CJX2-D80,95	87	127	160	179
CJX2-D40004,D50004,65004	84	116	149	168
CJX2-D40008,D50008,65008	84	127	149	168
CJX2-D80004,95004	96	122	160	179
CJX2-D80008,95008	96	135	160	179





Operating conditions

Item	Data
Ambient temperature	-5°C~+40°C
Altitude	≤2000m
Relative humidity	The maximum temperature is 40 degrees, and the relative humidity of the air should not exceed 50%. Higher relative humidity can be allowed at lower temperatures. If the humidity changes because of occasional gel generation, it should be eliminated.
Pollution level	3
Installation category	III
Installation position	Inclination between installation surface and vertical surface should not exceed ±5°
Installation	The installation of fastening screws can be used, the CJX2-D~38 contactor can also be installed on 35mm standard DIN rail.

Motor Control & Protection




CJX2-D AC Contactor

F4-D, LA2-D, LA3-D Contact Block

Type	Product	Configuration of contacts	
		Number of N/o contact	Number of N/c contact
F4-DN20 F4-DN11 F4-DN02		2 1 0	0 1 2
F4-DN40 F4-DN31 F4-DN22 F4-DN13 F4-DN04		4 3 2 1 0	0 1 2 3 4
Type		Time-delay range	Number of time-delay contacts
LA2-DT0 LA2-DT2 LA2-DT4		0.1S~3S 0.1S~30S 10S~180S	NO+NC NO+NC NO+NC
LA3-DRO LA3-DR2 LA3-DR4		0.1S~3S 0.1S~30S 10S~180S	NO+NC NO+NC NO+NC

C























LX1-D Coil

Type	Product	Frequency (Hz)	Coil voltage Us(V)													
			24	36	42	48	110	127	220	230	240	380	400	415	400	600
LX1-D2 09-18A		50Hz	B5	C5	D5	E5	F5	G5	M5	P5	U5	Q5	V5	N5	R5	X5
LX1-D4 25-32A		60Hz	B6	C6	D6	E6	F6	G6	M6	P6	U6	Q6	V6	N6	R6	X6
LX1-D6 40-95A		50/60Hz	B7	C7	D7	E7	F7	G7	M7	P7	U7	Q7	V7	N7	R7	X7

Motor Control & Protection

CJX2-D AC Contactor

Derived Products When the Contactor is Assembled with Following Accessory Module

Derived products	Contactor	Accessorial modular	Picture
Time-delay contactor		+ 	→ 
Reversing contactor		+ 	→ 
Magnetic starter		+ 	→ 
Front auxiliary contact		+ 	→ 
Side auxiliary contact		+ 	→ 
Changeover capacitor AC contactor		+ 	→ 
Star-delta contactor		+  + 	→ 

C

Motor Control & Protection

CJ19i(CJ19s) Contactor for Capacitor Switching

Overview



Opening design

It's convenient for customers to tighten and loosen screws at any time.



Unique slider design

- Turn tedious into simplicity, improve installation and disassembly efficiency.
- Realize tool-free installation and disassembly.
- The original tedious disassembly becomes very simply.



Fire resistance shell

High temperature resistance, corrosion resistance, safety and security.




Integrated signage, hard to fall off.



Pure copper coils

Automatic winding, enamelled wire above QA-180




Customized silicon steel sheet

DW600, big iron core, actuate more smoothly.



Silver alloy contact

Stronger electrical conductivity, more sensitive, not easy to oxidize.



Dust prevention

Add dust proof sticker, easy to deal with dusty environment, intimate care.



CJ19i(CJ19s) Contactor for Capacitor Switching



CJ19i



CJ19i



CJ19s




CJ19s

General

Cj19i contactor for capacitor switching (hereinafter called contactor) is suitable for the circuit of AC 50Hz/60Hz with rated voltage up to 690V. It is mainly used to add low voltage reactive power compensation equipment or cut off low voltage parallel capacitor. The contactor is equipped with a device to suppress the inrush current, which can effectively reduce the impact of the making inrush current on the capacitor and suppress the over-voltage when the capacitor is cut off.

Standard: IEC/EN 60947-4-1.

Type designation

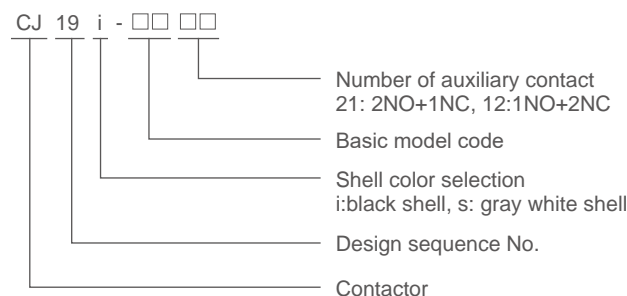

Operating conditions

- Ambient temperature:-5°C~+40°C, the average during 24 hours should not exceed +35°C;
- Altitude:≤2000m;
- Atmosphere conditions: At mounting site, relative humidity not exceed 50% at the max temperature of +40°C, higher relative humidity is allowable under lower temperature. For example, RH could be 90% at +20°C, special measures should be taken for occurrence of condensation;
- Pollution degree: 3
- Installation category: III
- Installation conditions: the inclination between installation plane and vertical plane is within ±5°
- Impact and shake: the products should locate in the places where there are no obvious impact and shake.



Motor Control & Protection

CJ19i(CJ19s) Contactor for Capacitor Switching

Technical data

Model			CJ19i-25 CJ19s-25	CJ19i-32 CJ19s-32	CJ19i-43 CJ19s-43	CJ19i-63 CJ19s-63	CJ19i-95 CJ19s-95	CJ19i-115 CJ19s-115
Main circuit features								
Rated operating voltage(Ue)		V	380/400					
Rated isolation voltage(Ui)		V	690					
Rated current of controllable capacitor(In)	AC-6b 400V	A	17	29	36	43	72	87
Rated capacity of controllable capacitor(Qn)	AC-6b 230V	kVar	6	9	10	15	22.5	35
	AC-6b 400V	kVar	12	18	20	30	45	60
Rated conventional heating current(Ith)		A	7.5	32	43	63	95	115
Restrained surge capacity		A	≤35In			≤55In		
Mechanical durability		10 ⁴ times	100					
Electrical durability	AC-6b 400V	10 ⁴ times	15				12	
Operating frequency cycles/h	AC-6b 400V	times/h	300				120	
Coil features								
Controlled power voltage (Us)	AC50Hz	V	110, 220, 380					
Operating voltage range	operation voltage	V	85%~110%Us when install inclination angle is +22.5°; 70%~120%Us when install inclination angle is ±5°;					
	release voltage	V	20%~75%Us when install inclination angle is +22.5°; 20%~65%Us when install inclination angle is ±5°;					
Auxiliary contact features								
Number of auxiliary contact			12,21					
Rated conventional heating current(Ith)		A	10					
The minimum load can be connected to			6V×10mA					


C

Motor Control & Protection


CJ19i(CJ19s) Contactor for Capacitor Switching

Overall and mounting dimensions

CJ19i(CJ19s)-63,95,115

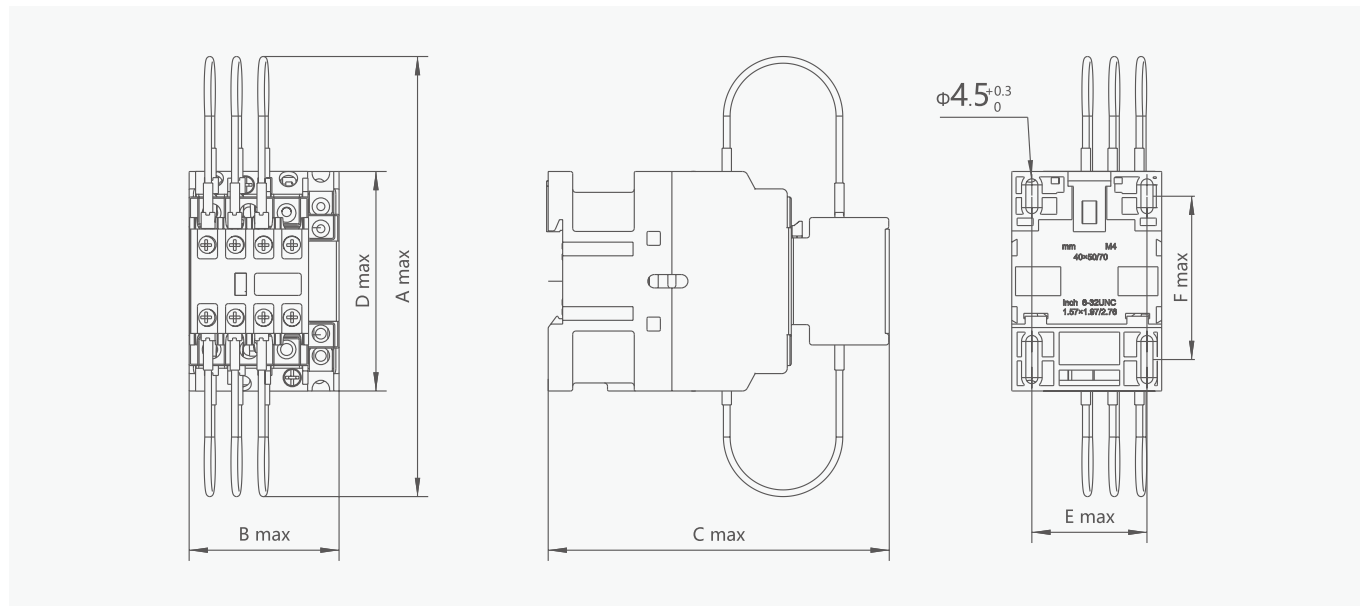

CJ19i(CJ19s)-25,32,43

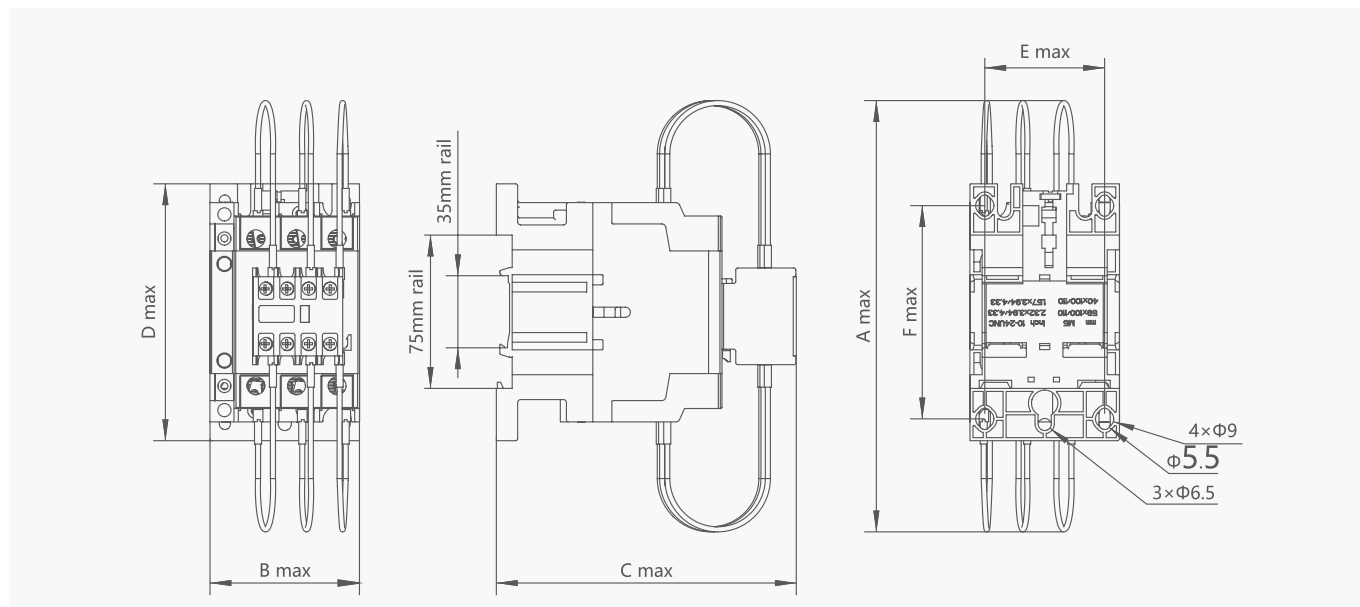

Model	overall dimensions				mounting dimensions	
	Amax	Bmax	Cmax	Dmax	Emax	Fmax
CJ19i(CJ19s)-25	176	45.5	122	74.5	35	50/60
CJ19i(CJ19s)-32	180	56.5	132	83	40	50/60
CJ19i(CJ19s)-43	180	56.5	132	83	40	50/60
CJ19i(CJ19s)-63	190	74.5	154	127.5	59	100/110
CJ19i(CJ19s)-95	190	85.5	160	127.5	67	100/110
CJ19i(CJ19s)-115	190	85.5	160	127.5	67	100/110
CJX2-D80008,95008	96	96	96	135	160	179


CJ19 Contactor for Capacitor Switching



General

CJ19 series AC Contactor is suitable for those circuits whose rated voltage is up to 400V AC 50Hz or 60Hz. CJ19 is used to combine with low voltage reactive power compensators or cut off low voltage shunt capacitor. CJ19 series AC Contactor has restraining device to effectively decrease impact caused by inrush transient current when switch on or over voltage when switch off.

Type designation

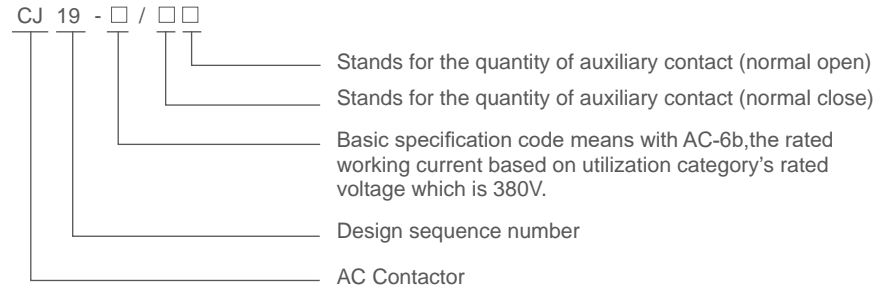

Note: Acquiesce in 3 pairs of N/O main auxiliary contacts and 3 pairs of N/O precharge auxiliary contacts

Technical data


Type Item		CJ19-25	CJ19-32	CJ19-43	CJ19-63	CJ19-95	CJ19-115
Controllable capacitor capacity (kvar)	230V	6	9	10	15	22.5	35
	400V	12	18	20	30	45	60
Rated insulation voltage (V)	500						
Rated operating voltage (V)	380						
Conventional thermal current (A)		25	32	43	63	95	115
AC-6b rated working current (A)		17	23	29	43	72	87
Restrained surge capacity/Capacitor rated current	20Ie						
Controlled power voltage (V)	48, 110, 127, 220, 380						
Conventional thermal current of auxiliary contacts (A)		6			10		
Operating frequency (cycles/h)	120						
Electrical life (×10 ⁵ time)	1						
Mechanical life (×10 ⁵ time)	10						

CJ19 Contactor for Capacitor Switching

C



Overall and mounting dimensions

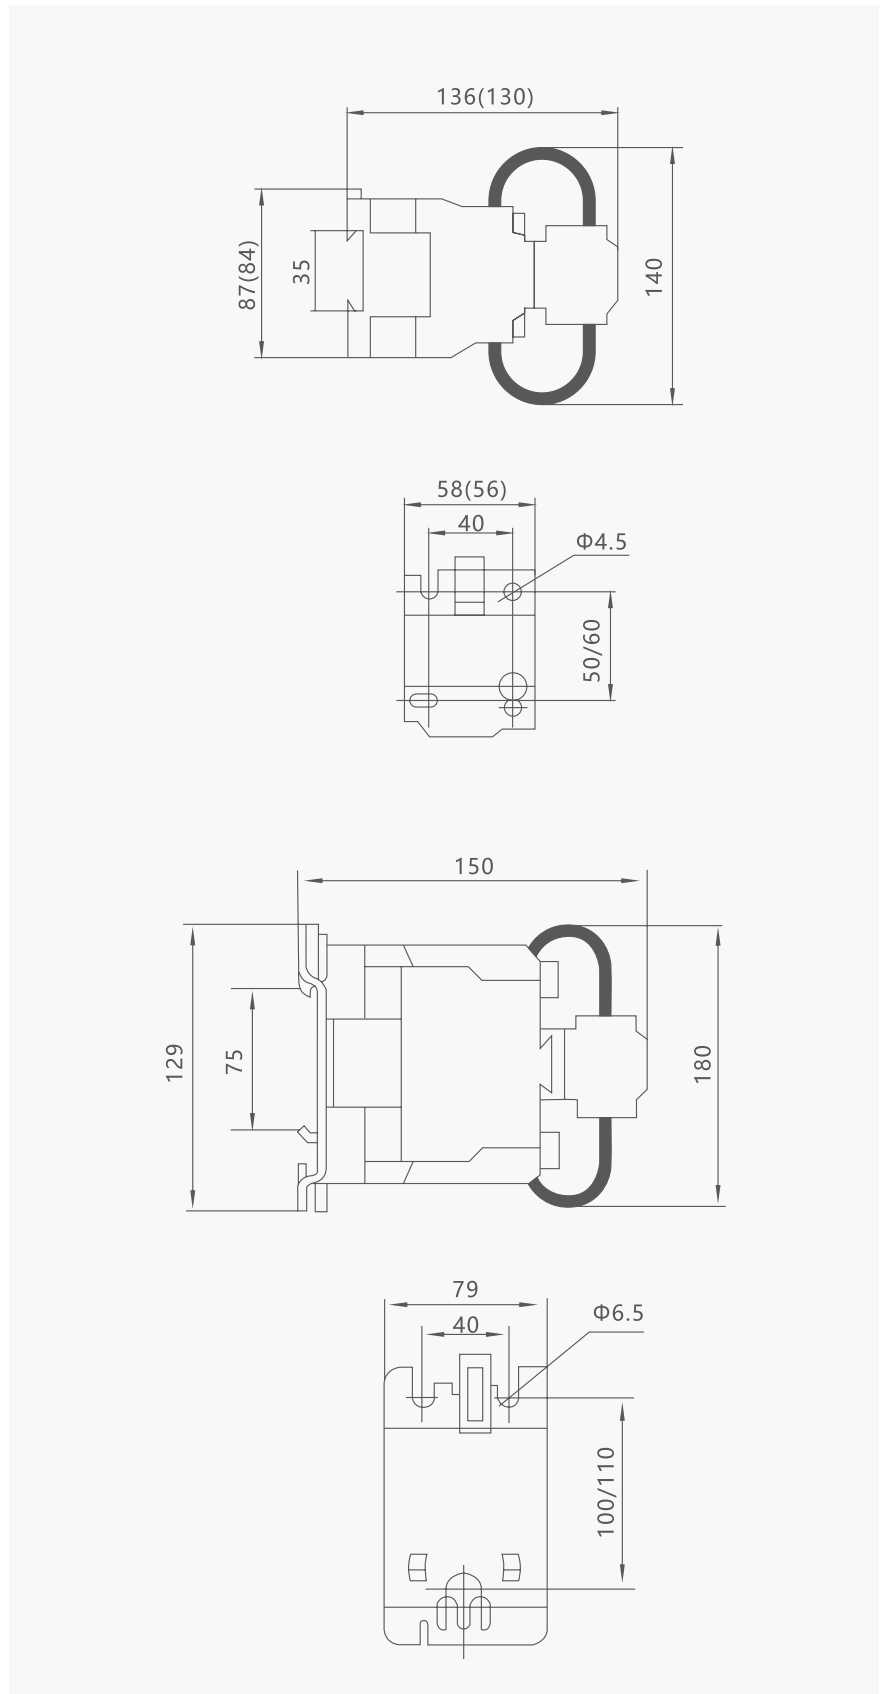

Motor Control & Protection

CJX2-Z DC Coil AC Contactor



CJX2-09-32Z



CJX2-40-95Z

General

CJX2-Z series operational contactors are suitable for circuits with a rated voltage of 660V AC 50Hz or 60Hz and a rated current of 9-95A under an AC-3/380v load. It is used for making, disconnecting and frequently starting motors in remote control circuits. It can also be used in combination with auxiliary contact groups, air delays, thermal relay devices, etc.

Technical data

Type		CJX2-09Z	CJX2-12Z	CJX2-18Z	CJX2-25Z	CJX2-32Z	
Rated working current(A)	380VAC	AC3	9	12	18	25	32
		AC4	3.5	5	7.7	8.5	12
	660VAC	AC3	6.6	8.9	12	18	21
		AC4	1.5	2	3.8	4.4	7.5
Rated thermal current (Ith)		20	20	32	40	50	
Controllable power (kW)	220/240VAC		2.2	3	4	5.5	7.5
	380/400VAC		4	5.5	7.5	11	15
	415VAC		4	5.5	9	11	15
	500VAC		5.5	7.5	10	15	18.5
	600/690VAC		5.58	7.5	10	15	18.5
Pole		3,4	3,4	3	3,4	3	
Rated working voltage(VAC)		380,660	380,660	380,660	380,660	380,660	
Rated insulation voltage(VAC)		660	660	660	660	660	
Mechanical life $\times 10^4$		1000	1000	1000	¹⁰⁰⁰	1000	
Electrical life	AC $\times 10^4$		100	100	100	100	100
	AC4 $\times 10^4$		20	20	20	²⁰	20
Operating frequency	Electrical life	AC $\times 10^4$	1200	1200	1200	1200	1200
		AC4 $\times 10^4$	300	300	300	300	300
	Mechanical life $\times 10^4$		3600	3600	3600	3600	3600
Rated controlled voltage(VDC)		24,110,220	24,110,220	24,110,220	24,110,220	24,110,220	
Working voltage	Close	DC%	0.85~1.1Us	0.85~1.1Us	0.85~1.1Us	0.85~1.1Us	0.85~1.1Us
	Open	DC%	0.10~0.75Us	0.10~0.75Us	0.10~0.75Us	0.10~0.75Us	0.10~0.75Us


Type		CJX2-40Z	CJX2-50Z	CJX2-65Z	CJX2-80Z	CJX2-95Z	
Rated working current(A)	380VAC	AC3	40	50	65	80	95
		AC4	18.5	24	28	37	44
	660VAC	AC3	34	39	42	49	55
		AC4	9	12	14	17.3	21.3
Rated thermal current (Ith)		60	80	80	125	125	
Controllable power (kW)	220/240VAC		11	15	18.5	22	25
	380/400VAC		18.5	22	30	37	45
	415VAC		22	30	37	45	45
	500VAC		22	30	37	55	55
	600/690VAC		30	33	37	45	55
Pole		3,4	3,4	3,4	3,4	3,4	
Rated working voltage(VAC)		380,660	380,660	380,660	380,660	380,660	
Rated insulation voltage(VAC)		660	660	660	660	660	
Mechanical life $\times 10^4$		800	800	800	⁸⁰⁰	800	
Electrical life	AC $\times 10^4$		80	80	80	80	80
	AC4 $\times 10^4$		15	15	15	¹⁵	15
Operating frequency	Electrical life	AC $\times 10^4$	600	600	600	600	600
		AC4 $\times 10^4$	300	300	300	300	300
	Mechanical life $\times 10^4$		3600	3600	3600	3600	3600
Rated controlled voltage(VDC)		24,110,220	24,110,220	24,110,220	24,110,220	24,110,220	
Working voltage	Close	DC%	0.85~1.1Us	0.85~1.1Us	0.85~1.1Us	0.85~1.1Us	0.85~1.1Us
	Open	DC%	0.10~0.75Us	0.10~0.75Us	0.10~0.75Us	0.10~0.75Us	0.10~0.75Us

Motor Control & Protection


CJX2-Z DC Coil AC Contactor

Overall and mounting dimensions

CJX2-09~32Z

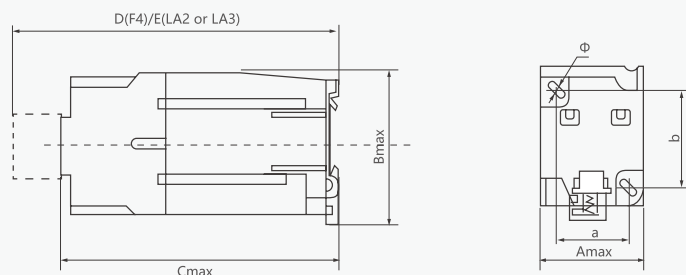

CJX2-40~95Z

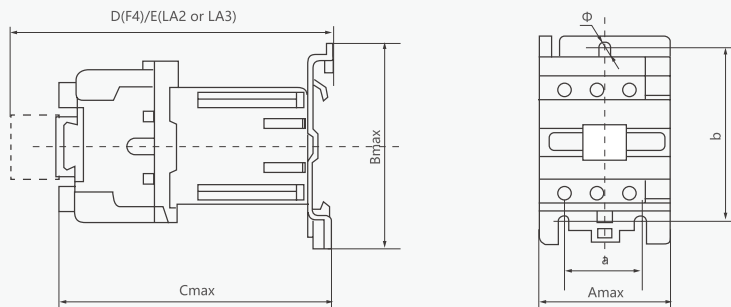

Type	Amax	Bmax	Cmax	Emax	a	b	c
CJX2-09Z~12Z	47	76	116	149	160	50/60	4.5
CJX2-18Z	47	76	120	157	177	50/60	4.5
CJX2-25Z	57	86	130	163	184	50/60	4.5
CJX2-32Z	57	86	135	168	189	50/60	4.5
CJX2-4011Z~6511Z	77	129	175	203	223	100/110	6.5
CJX2-4004Z~6504Z	85	129	174	203	223	100/110	6.5
CJX2-4008Z~6508Z	85	129	185	203	223	100/110	6.5
CJX2-8011Z~9511Z	87	129	183	212	230	100/110	6.5
CJX2-8004Z~9504Z	97	129	180	212	230	100/110	6.5
CJX2-8008Z~9504Z	97	129	191	212	230	100/110	6.5

Note: Not only for screw mounting, but also for 35mm [CJX2-09Z~95Z] and 75mm [CJX2-40Z~95Z] international standard Din-rail mounting.

Motor Control & Protection

CJX2-F(CJX2-FB) AC Contactor




CJX2-FB(B:Black)

General

CJX2-F series AC contactor is applied to circuits with AC 50Hz/60Hz, rated voltage up to 690V, rated current up to 800A. It is used for remote making & breaking circuits, and protecting circuit from overload when assembling with thermal over-load relay.

Standard: IEC 60947-4-1.

Type designation

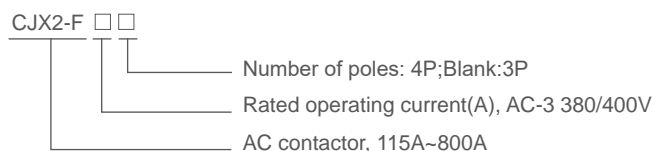

CJX2-FB

Operating conditions

1. Ambient temperature: -5°C~+40°C;
2. Air conditions: At mounting site, relative humidity not exceed 50% at the maximum temperature of +40°C. For the wettest month, the maximum relative humidity averaged shall be 90% while the lowest temperature averaged in that month is +20°C, special measures should be taken for occurrence of condensation.
3. Altitude: ≤2000m;
4. Pollution grade: 2
5. Mounting category: III;
6. Mounting conditions: inclination between the mounting plane and the vertical plane not exceed ±5°;
7. The product should be located in the places where there are no obvious impact and shake.

Technical data

Model	Rated conventional heating current(A) lth AC-1	Rated operating current(A)		Power of controlled 3-phase cage motor(kW)		Operating cycles (times/h) AC-3	Electrical life (×104 times) AC-3	Mechanical life (×104 times)	Matched fuse	
		AC-3	AC-4	AC-3	AC-4				Model	Rated current A
		380/400V	660/690V	380/400V	660/690V					
CJX2-F115	200	115	86	55	80	1200	120	1000	NT1	250
CJX2-F150	200	150	108	75	100				NT1	250
CJX2-F185	275	185	118	90	110	600	100	600	NT2	315
CJX2-F225	225	225	137	110	132				NT2	315
CJX2-F265	315	265	170	132	160				NT3	355
CJX2-F330	380	330	235	160	200				NT3	500
CJX2-F400	450	400	303	200	250				NT3	630
CJX2-F500	630	500	353	250	335				NT4	800
CJX2-F630	800	630	426	335	450	60	300	NT4	1000	
CJX2-F800	800	800(AC-3)	486(AC-3)	450	475			NT4	1000	
CJX2-F800	800	630(AC-4)	462(AC-4)	335	450			NT4	1000	

Motor Control & Protection

CJX2-F(CJX2-FB) AC Contactor

Accessories

Type designation

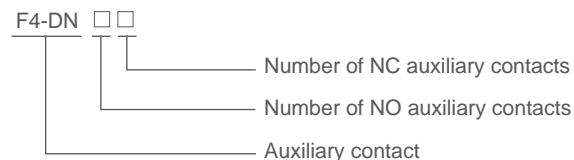


Table 2 Auxiliary contact

Type	Product	Configuration of contacts	
		Number of N/o contact	Number of N/c contact
F4-DN20 F4-DN11 F4-DN02		2 1 0	0 1 2
F4-DN40 F4-DN31 F4-DN22 F4-DN13 F4-DN04		4 3 2 1 0	0 1 2 3 4

Type designation

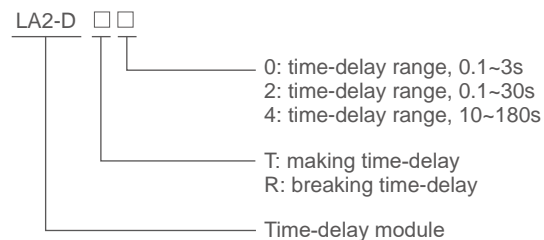






Table 3 Time-delay module

Type		Time-delay range	Number of time-delay contacts
LA2-DT0 LA2-DT2 LA2-DT4		0.1S~3S 0.1S~30S 10S~180S	NO+NC NO+NC NO+NC
LA3-DRO LA3-DR2 LA3-DR4		0.1S~3S 0.1S~30S 10S~180S	NO+NC NO+NC NO+NC

Motor Control & Protection

CJX2-F(CJX2-FB) AC Contactor

Table 4 Coil

Contactor type	Coil code	Coil voltage(V)			
		110V AC	127V AC	220V AC	380V AC
	CJX2-F115,150	FF 110	FF 127	FF 220	FF 380
	CJX2-F185,225	FG 110	FG 127	FG 220	FG 380
	CJX2-F265	FH 110	FH 127	FH 220	FH 380
	CJX2-F330	FH 1102	FH 1272	FH 2202	FH 3802
	CJX2-F400	FJ 110	FJ 127	FJ 220	FJ 380
	CJX2-F500	FK 110	FK 127	FK 220	FK 380
	CJX2-F630	FL 110	FL 127	FL 220	FL 380
	CJX2-F800	FM 110	FM 127	FM 220	FM 380

Note: operating voltage: (85%~110%)Us; drop-out voltage: (20%~75%)Us for common products, (10%~75%)Us for common products.

Terminal connection

Model	The connection capability			Screw size	Tightening torque (N·m)
	Number of piece	Cable cross section (mm ²)	Cu busbar cross section (mm ²)		
CJX2-F115	1	70~95	-	M6	3
CJX2-F150	1	70~95	-	M8	6
CJX2-F185	1	95~150	-	M8	6
CJX2-F225	1	95~150	-	M10	10
CJX2-F265	1	120~185	-	M10	10
CJX2-F330	1	185~240	-	M10	10
CJX2-F400	1(2)	240(150)	30×5	M10	10
CJX2-F500	2	150~185	30×8	M10	10
CJX2-F630	2	185~240	40×8	M12	14
CJX2-F800	2	185~240	40×8	M12	14


Product features

1. The contactor is composed of arc-extinguishing system, contact system, base frame and magnetic system (including iron core,coil).
2. The contact system of the contactor is a direct acting type with double break point distribution.
3. The lower base-frame of the contactor is made of shaped aluminum alloy and the coil is of plastic enclosed structure.
4. The coil is assembled into one body with the mature coil. They can be removed or inserted directly from the contactor.
5. It is convenient for user's service and maintenance.

CJX2-F(CJX2-FB) AC Contactor

Overall and mounting dimensions

C

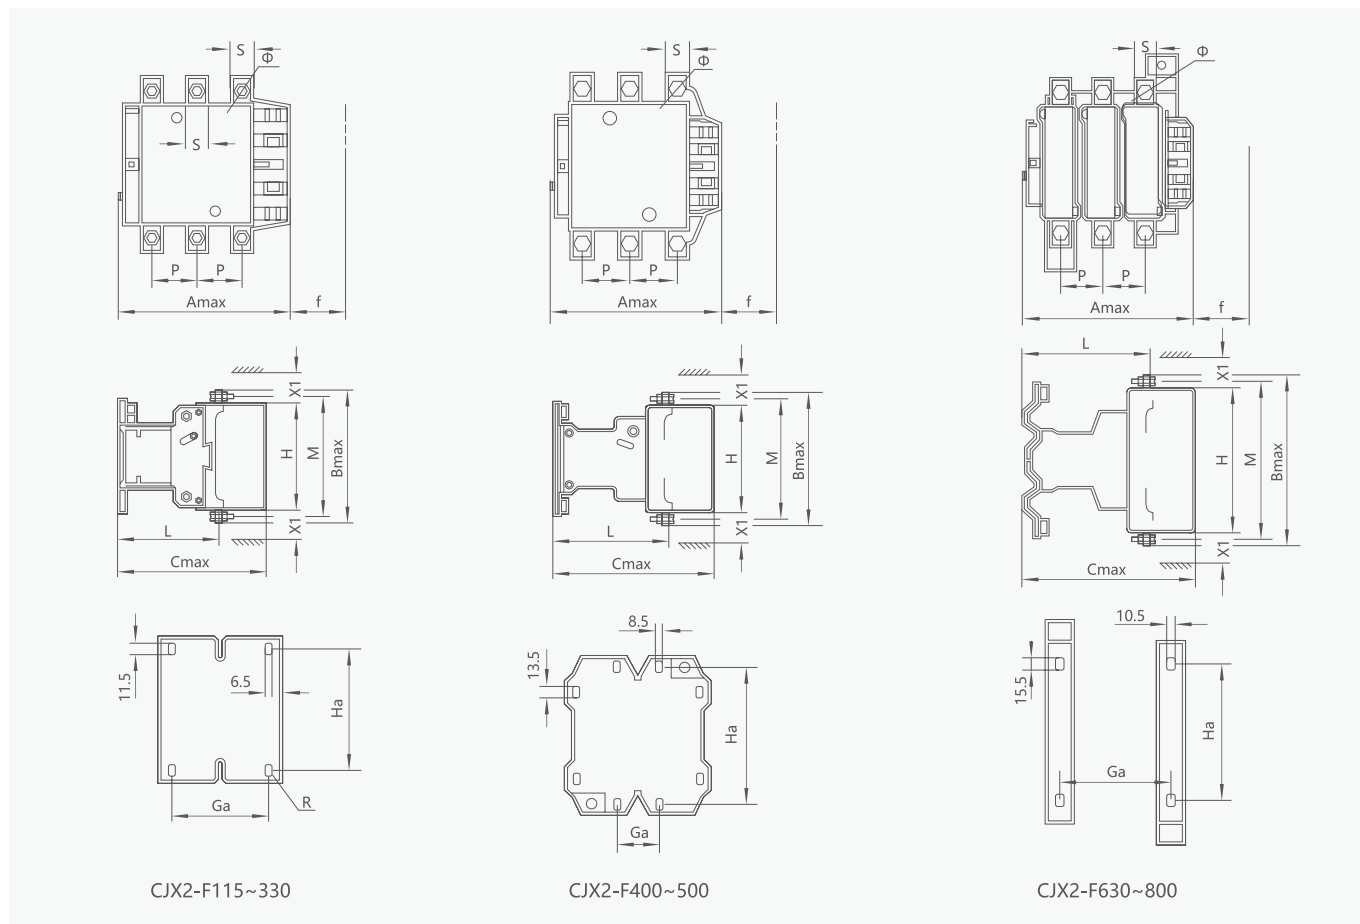

Model	CJX2-F115		CJX2-F150		CJX2-F185		CJX2-F225		CJX2-F265		CJX2-F330		CJX2-F400		CJX2-F500		CJX2-F630		CJX2-F800
	3P	4P	3P	4P	3P	4P	3P	4P	3P	4P	3P	4P	3P	4P	3P	3P	4P	3P	
A	168	204	168	204	171	211	171	211	202	247	215	261	215	261	235	312	389	312	
B	163	163	171	171	175	175	198	198	204	204	208	208	208	208	238	305	305	305	
C	172	172	172	172	183	183	183	183	215	215	220	220	220	220	233	256	256	256	
P	37	37	40	40	40	40	48	48	48	48	48	48	48	48	55	80	80	80	
S	20	20	20	20	20	20	25	25	25	25	25	25	25	25	30	40	40	40	
Φ	M6	M6	M8	M8	M8	M8	M10	M10	M10	M10	M10	M10	M10	M10	M10	M12	M12	M12	
f	131	131	131	131	131	131	131	131	147	147	147	147	146	146	150	181	181	181	
M	147	147	150	150	154	154	172	172	178	178	181	181	181	181	208	264	264	264	
H	124	124	124	124	127	127	127	127	147	147	158	158	158	158	172	202	202	202	
L	107	107	107	107	113.5	113.5	113.5	113.5	141	141	145	145	145	145	146	155	155	155	
X1 200~500V	10		10		10		10		10		10		15		15		20		20
X1 660~1000V	15		15		15		15		15		15		20		20		30		30
Ga	80		80		80		80		96		96		80		80		180	240	180
Ha	110~120		110~120		110~120		110~120		110~120		110~120		170~180		170~180		180~190		180~190

Note: a. f is the min distance needed to mount and dismount the coil.
 b. X1: arcing distance is identified by operating voltage and breaking capacity.

CJX2-F-N Mechanical Interlocking Contactor


Technical data



Type	Rated operation current(Ie)(A)	Rated thermal current(Ith)(A)	Rated operational power in category AC-3 (kW)		Rated insulation voltage(Ui)(V)
			380V	660V	
CJX2-F115N	115	200	55	80	1000
CJX2-F150N	150	200	75	100	1000
CJX2-F185N	185	275	90	110	1000
CJX2-F225N	225	275	110	129	1000
CJX2-F265N	265	315	132	160	1000
CJX2-F330N	330	380	160	220	1000
CJX2-F400N	400	450	200	280	1000
CJX2-F500N	500	630	250	335	1000
CJX2-F630N	630	800	335	450	1000
CJX2-F800N	800	800(AC-3)	450(AC-3)	475(AC-3)	1000
CJX2-F800N	800	630(AC-4)	335(AC-4)	450(AC-4)	1000



Overall and mounting dimensions(mm)

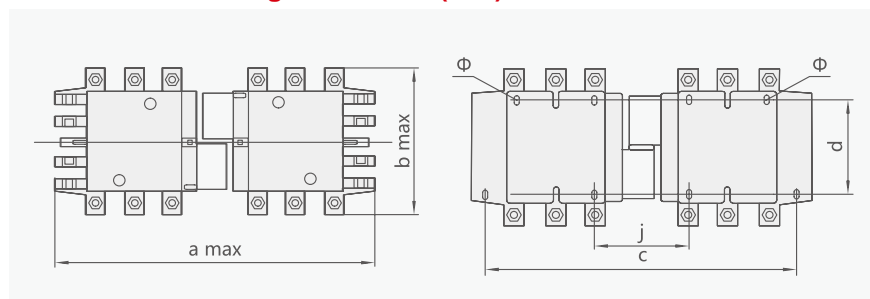

Type	Pole	a max	b max	c	d	j
CJX2-F115N	3P	350	163	163	110~120	71
	4P	425	208	208		108
CJX2-F150N	3P	350	171	171		71
	4P	425	211	211		111
CJX2-F185N	3P	350	174	174		78
	4P	430	223	223		118
CJX2-F225N	3P	350	197	197		78
	4P	430	243	243		118
CJX2-F265N	3P	450	203	203		109
	4P	546	249	249		157
CJX2-F330N	3P	450	206	206	124	
	4P	546	251	251	172	
CJX2-F400N	3P	485	206	206	170~180	157
	4P	595	251	251		157
CJX2-F500N	3P	485	238	238		156
CJX2-F630N	3P	650	304	304	180~190	139
	4P	810	364	364		139
CJX2-F800N	3P	650	304	304	139	


CKJ5-125~630 Series vacuum AC contactor



General

CKJ5 series vacuum AC contactors (hereinafter referred to as contactors) are mainly used in circuits with AC 50Hz, rated working voltage up to 1140V, and rated working current up to 630A. They are used for long-distance connection and disconnection of circuits, and can be combined with appropriate thermal overload relays or electronic protectors to form vacuum electromagnetic starters. They are particularly suitable for forming isolated vacuum electromagnetic starters.

Type designation

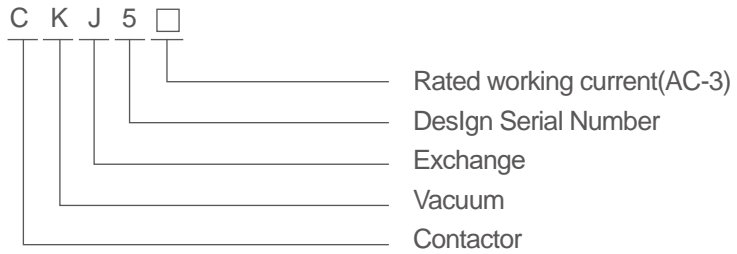

Operating Conditions

1. The ambient air temperature is $-5^{\circ}\text{C}\sim+40^{\circ}\text{C}$, and its average value within 24 hours does not exceed $+35^{\circ}\text{C}$.
2. Altitude not exceeding $+2000\text{m}$.
3. Atmospheric conditions: When the maximum temperature is $+40^{\circ}\text{C}$, the relative humidity of the air does not exceed 50%. Higher relative humidity can be allowed at lower temperatures, such as reaching 90% at 20°C . Special measures should be taken for occasional condensation caused by temperature changes.
4. Pollution level: Level 3.
5. Installation category: Class III.
6. Installation conditions: Vertical installation, with an inclination of no more than $\pm 5^{\circ}$ between the installation surface and the horizontal or vertical plane.
7. Impact vibration: The product should be installed and used in a place without significant shaking, impact, and vibration.

Features

1. Main specifications:
2. Divided by current grade: 125,160,250,400,630,
3. According to the contactor coil rated control power supply voltage U_s divided: exchange 50Hz: 36V,110V,127V,220V,380V.
4. Technical parameters:
5. The rated working voltage (U_e) and rated insulation voltage (U_i) of the contactor are 1140V;
6. 4.2.2 The main parameters and technical performance indicators of the contactor are shown in Table 1.



Motor Control & Protection

CKJ5-125~630 Series vacuum AC contactor

Table 1

Contactor model		CKJ5-125	CKJ5-160	CKJ5-250	CKJ5-400	CKJ5-630
Agreed free air heating current I _{th} (A)		125	160	250	400	630
Rated operational voltage U _e (V)		380/660/1140				
The maximum power (kW) of a controllable three-phase squirrel cage motor under the AC-3 usage category	380V	62	80	125	200	315
	660V	110	140	220	350	560
	1140V	185	235	370	590	930
Rated working current I _e (A)	1140V AC-3	125	160	250	400	630
	1140V AC-4	100	130	200	330	500
Mechanical life	Operating frequency (times/h)	1200	1200	1200	1200	1200
	Number of times(x10 ⁴)	300	300	300	300	300
Electrical lifespan(400V)	Operating frequency (times/h)	600	600	600	120	120
	Number of times(x10 ⁴)	60	60	60	60	60
Coil power(W)	Suction power ≤	287	287	430	703	1212
	Holding power ≤	16	16	19	21	41
Number of wires		1~2	1~2	1~2	1~2	2
Wire cross-sectional area(mm ²)		25~50	35~70	70~120	150~240	150~200
Copper Bar(mm ²)		-	-	-	-	40x5
Connecting bolts(mm ²)		M8	M8	M10	M10	M12
Tightening torque(N·m)		6	6	10	10	14
Matched SCPD		NT3 315A	NT3 315A	NT3 400A	NT3 500A	NT3 630A
Basic parameters of auxiliary contacts		AC-15:380V/1.9A;DC-13:220V/ 0.31A; U _i =690V,I _{th} =10A,U _{imp} =12kV				
Number of auxiliary contacts		CKJ5-125~160 can be used with two normally open and one normally closed CKJ5-250~400 can be four normally open and three normally closed CKJ5-630 can be three normally open and two normally closed				

The auxiliary contacts of CKJ5-125-400 products connected to the coil are the first set of normally closed auxiliary contacts of NK2-1(A) type auxiliary contact group. The auxiliary contacts of CKJ5-630 connected to the coil are the first set of normally closed auxiliary contacts of the auxiliary contact group and cannot be replaced. CKJ5-125-160 can be equipped with an additional set of two normally open and two normally closed auxiliary contacts, which need to be specially customized and specified.

4.3 Action range: The suction voltage is between 85% U_s and 110% U_s; The release voltage is between 10% U_s and 75% U_s.

Structural characteristics

The contactor consists of an electromagnetic system, a contact system, and auxiliary contacts. The CKJ5-125~400 contactor is a three-dimensional structure, with the upper part being the contact system and the lower part being the electromagnetic system. The electromagnetic system consists of a coil, iron core, and rectifier device, installed in a base made of cast aluminum alloy or DMC. The CKJ5-630 contactor is arranged in a flat structure, with a contact system on the left and an electromagnetic system on the right. The contact system consists of dynamic and static contacts and a vacuum arc extinguishing chamber, installed in a base made of insulating materials. The electromagnetic system adopts an energy-saving scheme of DC dual coil and dual winding. The vacuum arc extinguishing chamber adopts a new type of contact material for one-time sealing and discharging. The product has a compact structure, making it easy to assemble explosion-proof electromagnetic starters and switchgear.

Motor Control & Protection

CKJ5-125~630 Series vacuum AC contactor

Overall and mounting dimensions(mm)

The appearance and installation dimensions are shown in Figures 1 to 4 and Table 2.

Figure 1 CKJ5-125~160 Appearance and Installation Dimensions

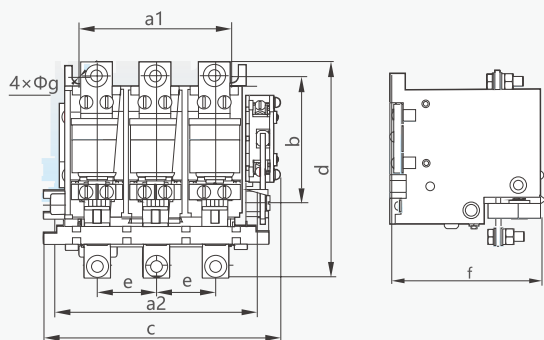


Figure 2 CKJ5-250 Appearance and Installation Dimensions

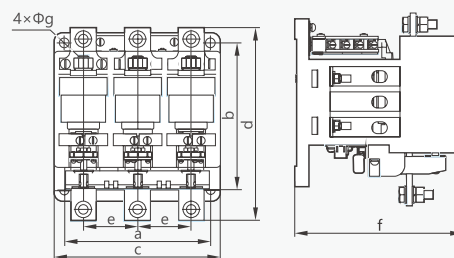


Figure 3 CKJ5-400 Appearance and Installation Dimensions

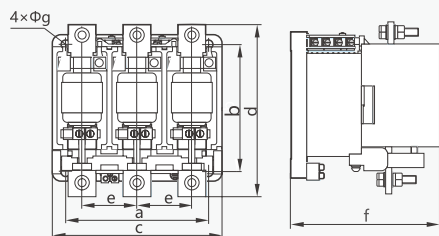


Figure 4 CKJ5-630 Appearance and Installation Dimensions

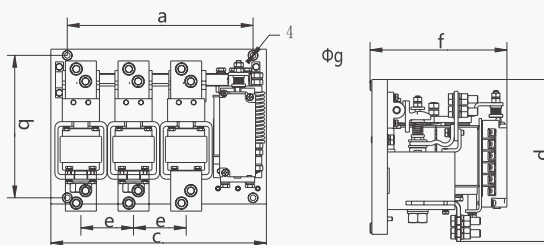


Table 2

Model	Parameter	a	b	c(max)	d(max)	e	f(max)	g
CKJ5-125		$106 \pm 0.36 / 137 \pm 0.46$	87 ± 0.36	173	150	41	130	9
CKJ5-160		$106 \pm 0.36 / 137 \pm 0.46$	87 ± 0.36	173	150	41	130	9
CKJ5-250		160 ± 0.51	160 ± 0.51	183	213	59	186	12
CKJ5-400		180 ± 0.7	160 ± 0.51	216	221	70	192	11
CKJ5-630		300 ± 0.8	230 ± 0.8	353	265	85	225	9

Motor Control & Protection

YCC6 AC Contactor



General

YCC6 series AC Contactor with novel appearance and compact structure is suitable for using starting & controlling the AC motor frequently, switching on and off the circuit at a long distance. It is used in combination with thermal relay to compose a magnetic motor starter.


Standard: IEC 60947-1, IEC 60947-4-1.

Technical data

- Rated operation current(Ie): 9-95A
- Rated operation voltage(Ue):220V~690V
- Rated insulation voltage: 690V
- Poles: 3P
- Installation: Din rail and screw installation

Type designation

Y C C 6 - 09 / 1 1 220V

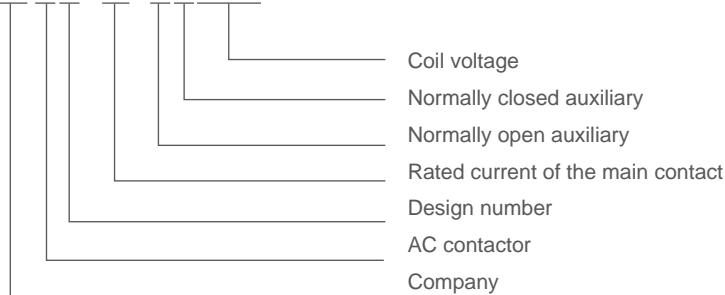

Operating Conditions

Type	Operating Conditions
Installation category	III
Pollution degree	3
Certification	CE, CB, CCC, TUV
Protection degree	YCC6-09~38:IP20(front side);YCC6-40~95:IP10
Ambient temperature	Limit of temperature: -35°C~+70°C; Normal temperature: -5°C~+40°C; The average no more than +35°C within 24 hours; If not in normal operating temperature range, please refer to "Instructions for abnormal environment"
Altitud	≤ 2000m
Ambient temperature	The maximum temperature of 70 degrees, the air relative humidity not exceed 50%, under lower temperature can allow for higher relative humidity. If the temperature is 20°C, the air relative humidity could upto 90%. Special measures should be taken for occasional condensation due to humidity changes.
Installation position	Inclination between installation surface and vertical surface-should not exceed +5°
Shock vibration	Products should be installed and used without significant shake, shock and vibration place.

Motor Control & Protection

YCC6 AC Contactor

Specifications


YCC6 Specifications														
Type			YCC6-09	YCC6-12	YCC6-18	YCC6-25	YCC6-32	YCC6-38	YCC6-40	YCC6-50	YCC6-65	YCC6-80	YCC6-95	
Main circuit characteristic														
Poles			3P											
Rated insulation voltage(Ui)	V	690												
Rated operating voltage(Ue)	V	220/230,380/400,660/690												
Rated thermal current(Ith), AC-1			20	20	32	40	50	50	60	80	80	125	125	
Rated operation current(Ie)	AC-3,380/400V	A	9	12	18	25	32	38	40	50	65	80	95	
	AC-3,660/690V	A	6.6	8.9	12	18	22	22	34	39	42	49	49	
	AC-4,380/400V	A	3.5	5	7.7	8.5	12	14	18.5	24	28	37	44	
	AC-4,660/690V	A	1.5	2	3.8	4.4	7.5	8.9	9	12	14	17.3	21.3	
Rated operational power(Pe)	AC-3,380/400V	kW	4	5.5	7.5	11	15	18.5	18.5	22	30	37	45	
	AC-3,660/690V	kW	5.5	7.5	10	15	18.5	18.5	30	33	37	45	45	
	AC-4,380/400V	kW	1.5	2.2	3.3	4	5.4	5.5	7.5	11	15	18.5	22	
	AC-4,660/690V	kW	1.1	1.5	3	3.7	5.5	6	7.5	10	11	15	18.5	
Mechanical life			1200				1000			900			650	
Electrical life	AC-3	10000 times	110				90			65				
	AC-4		22				22			17				
Frequency of operation	AC-3	times/hour	1200				600							
	AC-4		300				300							
Connecting capability of main circuit terminal														
Flexible wire	wire	mm ²	1				1.5 6			2.5			4...50	
No terminal	2 wire	mm ²	1...4				1.5...6			2.5...16			4...25	
Flexible wire	1 wire	mm ²	1...4				1...6			2.5...25			4...50	
With terminals	2 wire	mm ²	1...2.5				1...4			2.5...10			4...16	
Hard wire	1 wire	mm ²	1...4				1.5...6	1.5...10			2.5...25			4...50
No terminal	2 wire	mm ²	1...4				1.5...			2.5...10			4...25	
Fastening torque	N·m		1.2				1.8			5			9	
Coil														
Rated control voltage(Us)	50Hz	V	24, 36, 48, 110, 127, 220/230, 240, 380/400, 415, 440											
	50/60Hz	V	24, 36, 48, 110, 127, 220/230, 240, 380/400, 415, 440											
Allowed control circuit voltage(Us)	Operation	V	Installation inclination angle $\pm 22.5^\circ$: 85%~110%Us; Installation inclination angle $\pm 5^\circ$: 70%~120%											
	Release	V	Installation inclination angle $\pm 22.5^\circ$: 20%~75%Us; Installation inclination angle $\pm 5^\circ$: 20%~65%											
Power consumption of coil	Actuation	VA	60				70			200			200	
	Keep	VA	6-9.5				6-9.5			15-20			15-20	
	Consumption	W	1-3				1-3			6-10			6-10	
Auxiliary contacts														
Auxiliary contacts specification	A		1NO+1NC											
Rated thermal current (Ith)	A		10											
Rated operating voltage (Ue)	AC	V	380											
	DC	V	220											
Rated control capacit	AC-15	VA	360											
	DC-13	W	33											
Certification	CCC, CE, TUV, CB													

Motor Control & Protection


YCC6 AC Contactor

Overall and mounting dimensions(mm)

YCC6-09-38

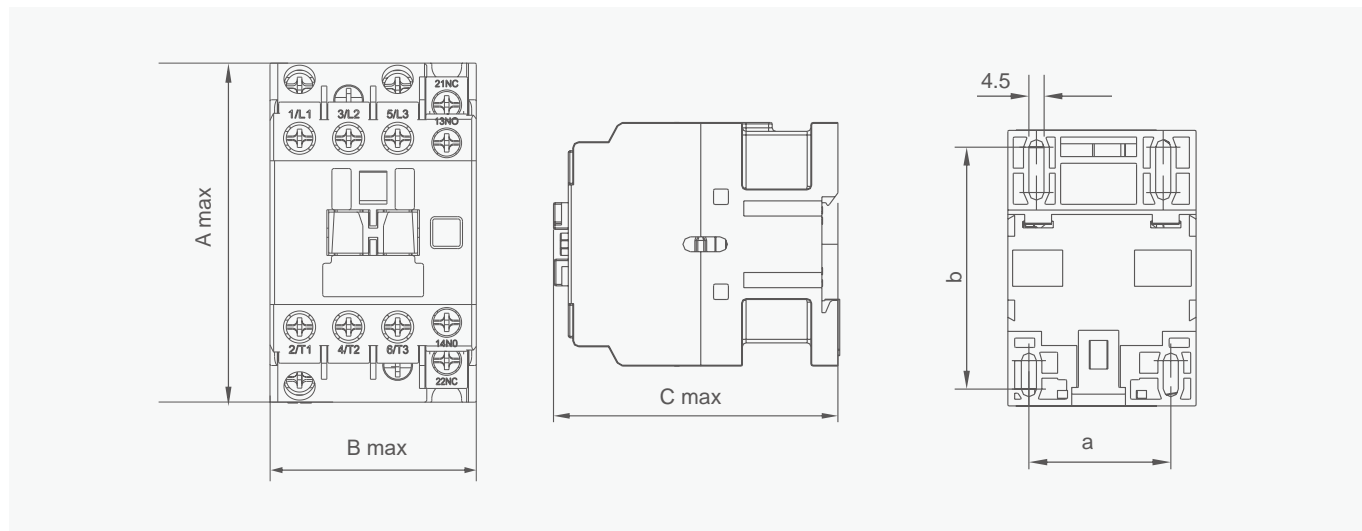

YCC6-40-95

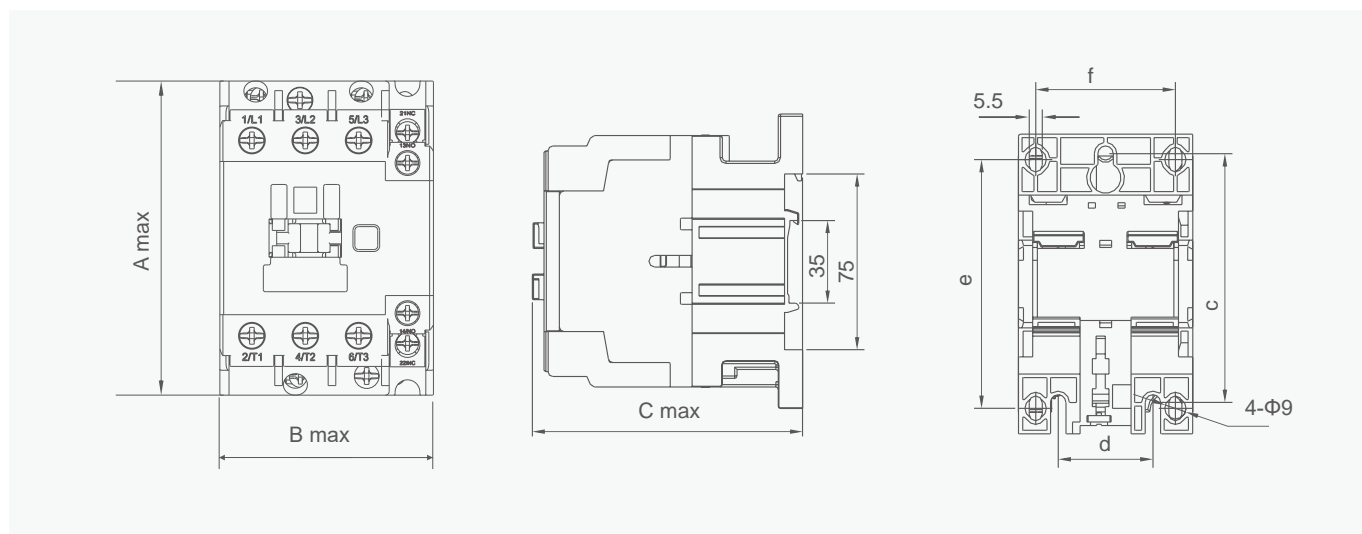





Type	A max	B max	B max	a	b	c	d	e	f
YCC6-09, 12, 18	74.5	45.5	85.5	35	50/60	-	-	-	-
YCC6-25, 32, 38	83	56.5	97	40	50/70	-	-	-	-
YCC6-40, 50, 65	127.5	74.5	117	-	-	105	40	100/110	59
YCC6-80, 95	127.5	85.5	125.5	-	-	105	40	100/110	67

C




Motor Control & Protection

YCC6 AC Contactor

F4-D.LA2-D,LA3-D Contact Block

Type	Product	Configuration of contacts	
		Number of N/o contact	Number of N/c contact
F4-DN20 F4-DN11 F4-DN02		2 1 0	0 1 2
F4-DN40 F4-DN31 F4-DN22 F4-DN13 F4-DN04		4 3 2 1 0	0 1 2 3 4
Type		Time-delay range	Number of time-delay contacts
LA2-DT0 LA2-DT2 LA2-DT4		0.1S~3S 0.1S~30S 10S~180S	1NO+1NC
LA3-DRO LA3-DR2 LA3-DR4		0.1S~3S 0.1S~30S 10S~180S	1NO+1NC


LX1-D Coil

Type	A max	Coil voltage Us(V) Frequency (Hz)	Coil voltage Us(V)													
			24	36	42	48	110	127	220	230	240	380	400	415	400	600
LX1-D2		50Hz	B5	C5	D5	E5	F5	G5	M5	P5	U5	Q5	V5	N5	R5	X5
LX1-D4		60Hz	B6	C6	D6	E6	F6	G6	M6	P6	U6	Q6	V6	N6	R6	X6
LX1-D6		50/60Hz	B7	C7	D7	E7	F7	G7	M7	P7	U7	Q7	V7	N7	R7	X7

Motor Control & Protection

YCC6 AC Contactor

Derived products when the contactor is assembled with following accessory module

Derived products	Contactor	Accessory modular	Picture
Time-delay contactor		+ 	→ 
Reversing contactor		+ 	→ 
Magnetic starter		+ 	→ 
Auxiliary Contact		+ 	→ 
Changeover capacitor AC contactor		+ 	→ 
Dust cover		+ 	→ 

YCC6 AC Contactor


Specifications




Type	Rated operation current(Ie)(A)	Rated thermal current (Ith)(A)	Rated operational power in category AC-3 (kW)	
			380V	660V
YCC6-09N	9	20	4	5.5
YCC6-12N	12	20	5.5	7.5
YCC6-18N	18	32	7.5	10
YCC6-25N	25	40	11	15
YCC6-32N	32	50	15	18.5
YCC6-38N	38	50	15	18.5
YCC6-40N	40	50	18.5	30
YCC6-50N	50	60	22	33
YCC6-65N	65	80	30	37
YCC6-80N	80	95	37	45
YCC6-95N	95	95	45	55

Overall and mounting dimensions(mm)

YCC6-09-38N

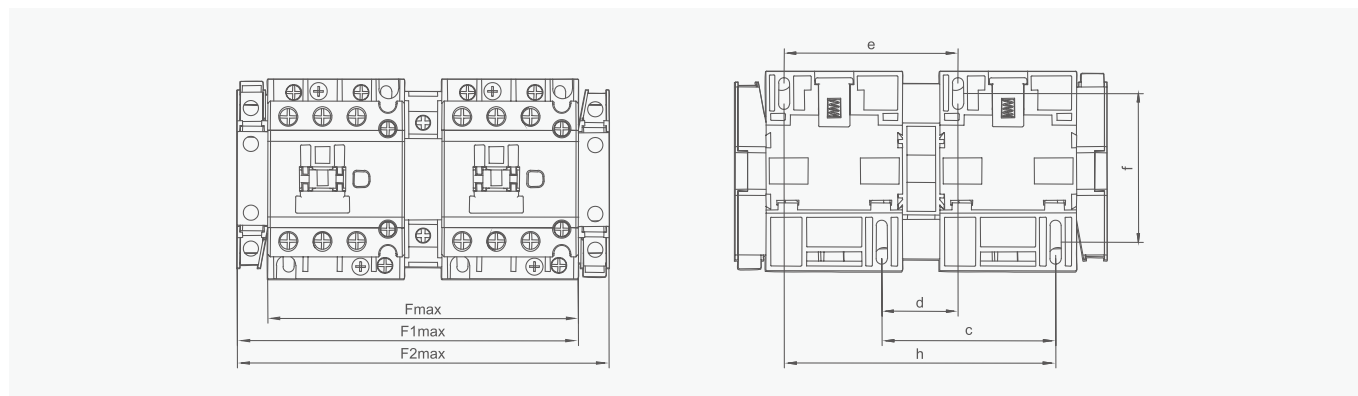

YCC6-40-95N

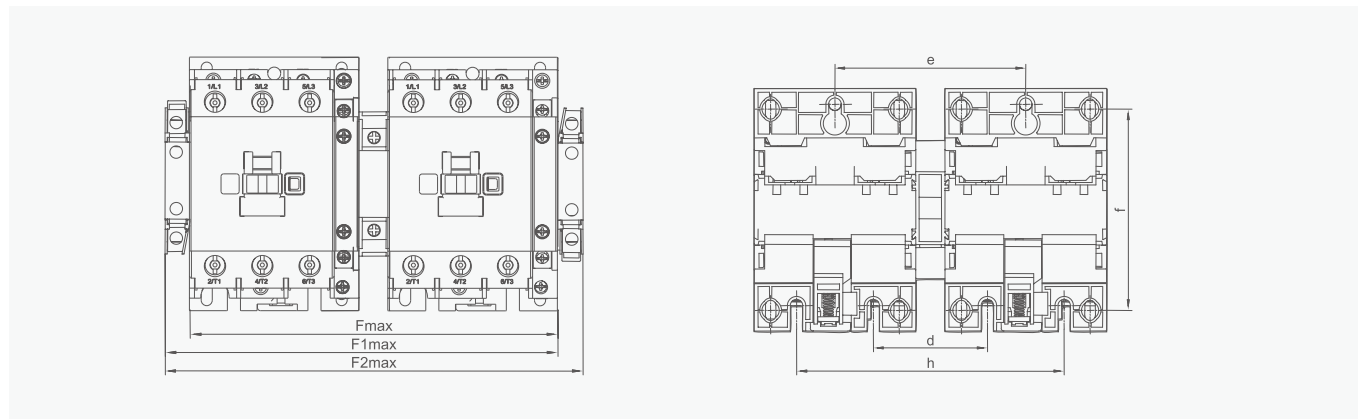

Type	A max	B max	B max	a	b	c	d	e	f
YCC6-09, 12, 18	74.5	45.5	85.5	35	50/60	-	-	-	-
YCC6-25, 32, 38	83	56.5	97	40	50/70	-	-	-	-
YCC6-40, 50, 65	127.5	74.5	117	-	-	105	40	100/110	59
YCC6-80, 95	127.5	85.5	125.5	-	-	105	40	100/110	67

Motor Control & Protection


YCMD7 Series Multi-circuit Motor Control Unit



General

The YCMD7 series multi-circuit motor control unit is mainly used to control the start and stop of 2 to 10 motor circuits, with power indication, operation indication, and fault indication. When a motor fault signal is input, it can effectively stop the operation of the equipment. This product consists of a control main body and a panel, which are connected by signal lines for quick insertion. The panel is responsible for issuing commands, while the control main body controls the operation of the AC contactors.

Type designation

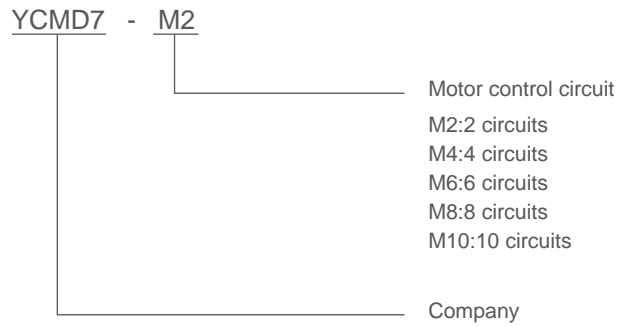

Operating Conditions

1. Installation Category: III
2. Pollution Degree: 3
3. Ambient Temperature: -5°C to +40°C
4. Extreme Operating Temperature: -35°C to +70°C
5. Altitude: ≤2000m
6. Installation Conditions: The inclination between the installation surface and the vertical plane should not exceed ±5 degrees.
7. The product should be installed and used in a place without significant shaking, impact, and vibration.



Motor Control & Protection

YCMD7 Series Multi-circuit Motor Control Unit

Technical data

Power supply voltage: AC220V (other voltages can be customized)





Control AC contactor coil voltage: AC220V, AC380V

Rated current: 5A

Number	Model	Number of circuit	Remote control	Panel	Panel dimensions (Width * Height * Depth)	Panel cutout
1	YCMD7-M2	2 circuits	Local control	/	140*90*26	130*80
2	YCMD7-M4	4 circuits		/	200*150*50	180*130
3	YCMD7-M6	6 circuits		/	200*150*50	180*130
4	YCMD7-M8	8 circuits		/	242*175*50	222*155
5	YCMD7-M10	10 circuits		/	242*175*50	222*155
6	YCMD7-M4W1	4 circuits	Remote controllable (Terminals can be connected to external control buttons)	Single sided panel	200*150*50	180*130
7	YCMD7-M4W2	4 circuits		Double sided panel	200*150*50	180*130
8	YCMD7-M6W1	6 circuits		Single sided panel	200*150*50	180*130
9	YCMD7-M6W2	6 circuits		Double sided panel	200*150*50	180*130



Note: The default length for Ethernet cable configuration is 2 meters. Please specify when ordering if a different length is required.

Overall and mounting dimensions(mm)

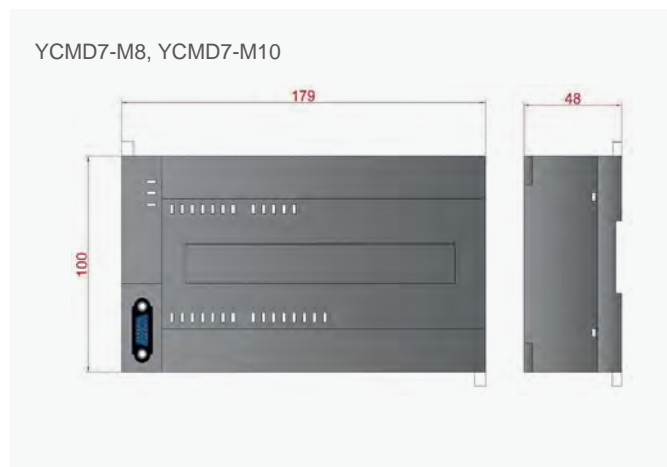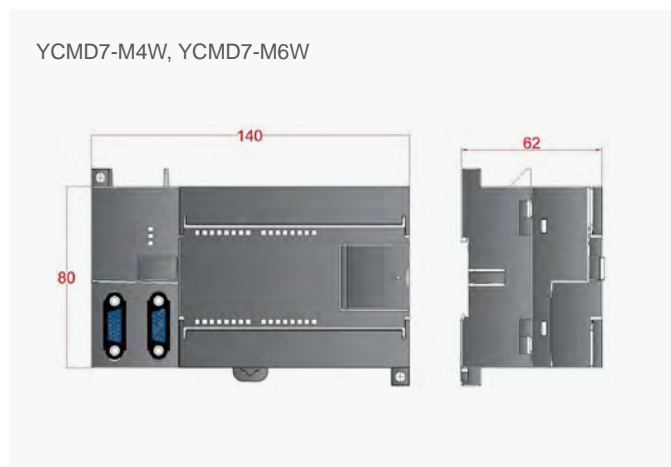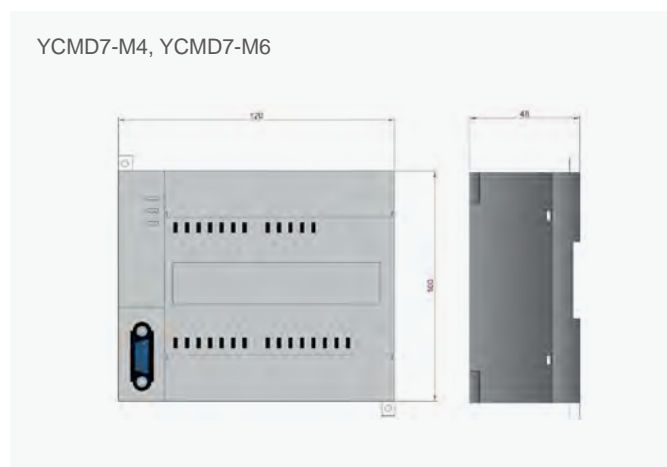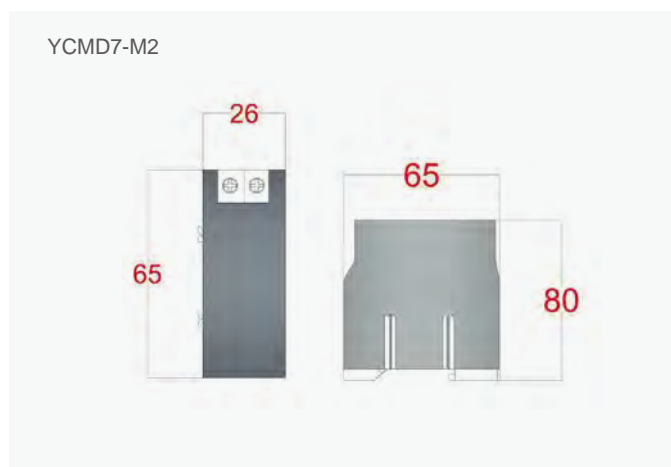

Motor Control & Protection

YCMD7 Series Multi-circuit Motor Control Unit

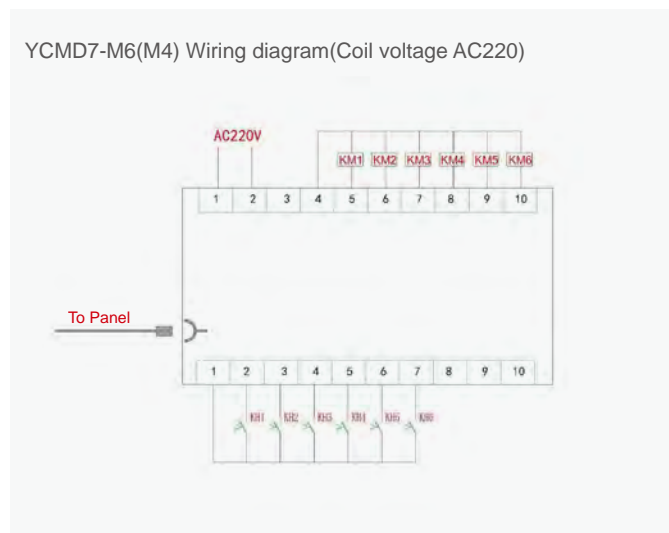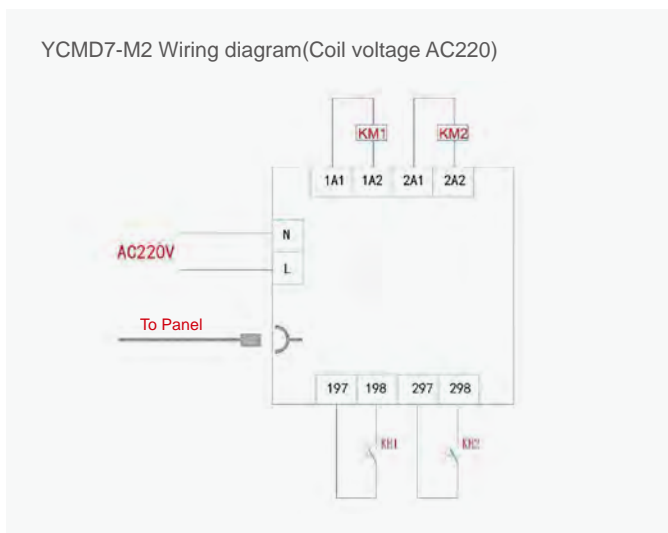



Motor Control & Protection

YCMD7 Series Multi-circuit Motor Control Unit

YCMD7-M10(M8)Control panel dimensions



YCMD7-M6W(M4W) Wiring diagram(Coil voltage AC220)

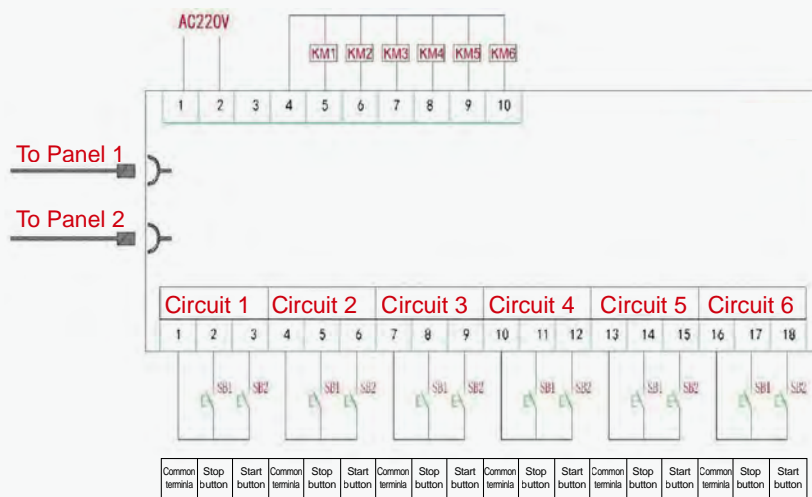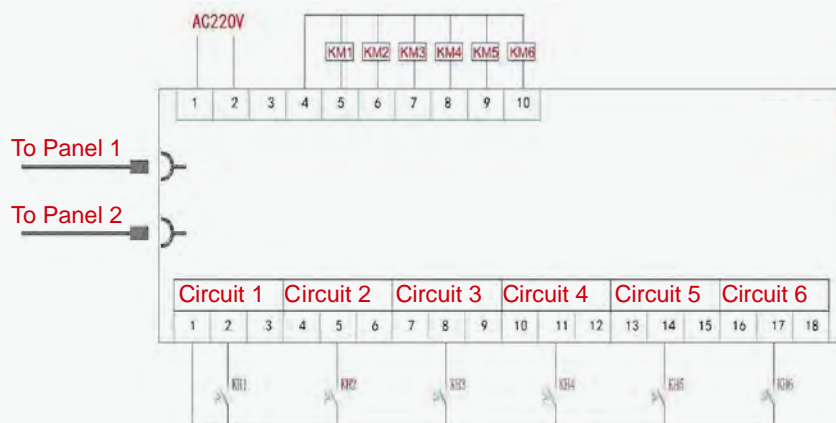

Note: For remote control connection to the control terminals, refer to the diagram below.

Motor Control & Protection

CJX2s-M AC Contactor



General

CJX2s-M series AC Contactor with novel appearance and compact structure is suitable for using starting & controlling the AC motor frequently, switching on and off the circuit at a long distance. It is used in combination with thermal relay to compose a magnetic motor starter.

Standard: IEC 60947-1, IEC 60947-4-1.

Type designation

CJX2s-M □□ □□ -/ □

- Z represents DC operation, N represents reversible AC contactor
- The types and quantities of contacts, represented by numbers (reversible contactors represent the types and quantities of contacts for a single product)
 - 10: Indicating three normally open main contacts and one normally open auxiliary contact
 - 01: Indicating three normally open main contacts and one normally closed auxiliary contact
 - 08 :Indicating two normally open and two normally closed main contacts
 - 04: Indicating four normally open main contacts
- Rated current, expressed as the rated working current value of 400 (380)V and AC-3 (6A,9A,12A,16A)
- Design Serial Number

Features

1. Rated operation current(Ie): 6-16A;
2. Rated operation voltage(Ue): 220V~690V;
3. Rated insulation voltage: 690V;
4. Poles: 3P, 4P;
5. Installation: Din rail and screw installation

Operating Conditions

1. Installation category: III
2. Pollution level: 3
3. Certification: CE, CB, CCC, TUV
4. Protection degree: Ip20
5. Ambient temperature: limit of temperature: -35°C~+70°C, normal temperature: -5°C~+40°C, The average no more than +35°C within 24 hours. If not in normal operating temperature range, please refer to "Instructions for abnormal environment"
6. Altitude: ≤2000m
7. Ambient temperature: The maximum temperature of 70 degrees, the air relative humidity not exceed 50%, under lower temperature can allow for higher relative humidity. If the temperature is 20°C, the air relative humidity could up to 90%, Special measures should be taken for occasional condensation due to humidity changes.
8. Installation position: Inclination between installation surface and vertical surface should not exceed ±5°
9. Shock vibration: Products should be installed and used without significant shake, shock and vibration place.



Motor Control & Protection

CJX2s-M AC Contactor

Technical data

CJX2s Specifications


Type			CJX2s-M06	CJX2s-M09	CJX2s-M12	CJX2s-M16
Main circuit characteristic						
Poles			3P, 4P			
Rated insulation voltage(Ui)	V	690				
Rated operating voltage(Ue)	V	380/400, 660/690				
Rated thermal current(Ith), AC-1			20	20	20	20
Rated operation current(Ie)	AC-3,380/400V	A	6	9	12	16
	AC-3,660/690V	A	3.8	4.9	4.9	4.9
	AC-4,380/400V	A	6	9	9	12
	AC-4,660/690V	A	3.8	4.9	4.9	4.9
Rated operational power(Pe)	AC-3,380/400V	kW	2.2	4	5.5	7.5
	AC-3,660/690V	kW	3	4	4	4
Mechanical life			1200			
Electrical life	AC-3	10000 times	12			
	AC-4		See electrical life curve			
Frequency of operation	AC-3	times/hour	1200			
	AC-4		300			
Connecting capability of main circuit terminal						
Flexible wire	wire	mm ²	1...4			
No terminal	2 wire	mm ²	1...4			
Flexible wire	1 wire	mm ²	1...4			
With terminals	2 wire	mm ²	1...2.5			
Hard wire	1 wire	mm ²	1...4			
No terminal	2 wire	mm ²	1...4			
Fastening torque	N·m		1.2			
Coil						
Rated control voltage(Us)	50Hz	V	24, 36, 48, 110, 127, 220, 380, 415			
	50/60Hz	V	24, 36, 48, 110, 127, 220, 380, 415			
	DC	V	12, 24, 36, 48, 110, 127, 220			
Allowed control circuit voltage(Us)	Operation	V	Installation inclination angle $\pm 22.5^\circ$: 85%~110%Us; Installation inclination angle $\pm 5^\circ$: 70%~120%			
	Release(AC)	V	Installation inclination angle $\pm 22.5^\circ$: 20%~75%Us; Installation inclination angle $\pm 5^\circ$: 20%~60%			
	Release(DC)	V	Installation inclination angle $\pm 22.5^\circ$: 10%~75%Us; Installation inclination angle $\pm 5^\circ$: 10%~60%			
Power consumption of coil	Actuation	VA	20-40			
	Keep	VA	9.5			
	Consumption	W	1-3			
Auxiliary contacts						
Auxiliary contacts specification	A	1NO+1NC				
Rated thermal current (Ith)	A	10				
Rated operating voltage (Ue)	AC	V	380/400			
	DC	V	220			
Rated control capacit	AC-15	VA	Ue/Ie: AC380V/400V/1.5A Ith: 10A			
	DC-13	W	Ue/Ie: DC220V/0.3A			
Certification			CCC, CE, TUV, CB			

Motor Control & Protection

CJX2s-M AC Contactor


Overall and mounting dimensions(mm)

Installation and overall dimensions of CJX2s-M06-M16 series AC contactor

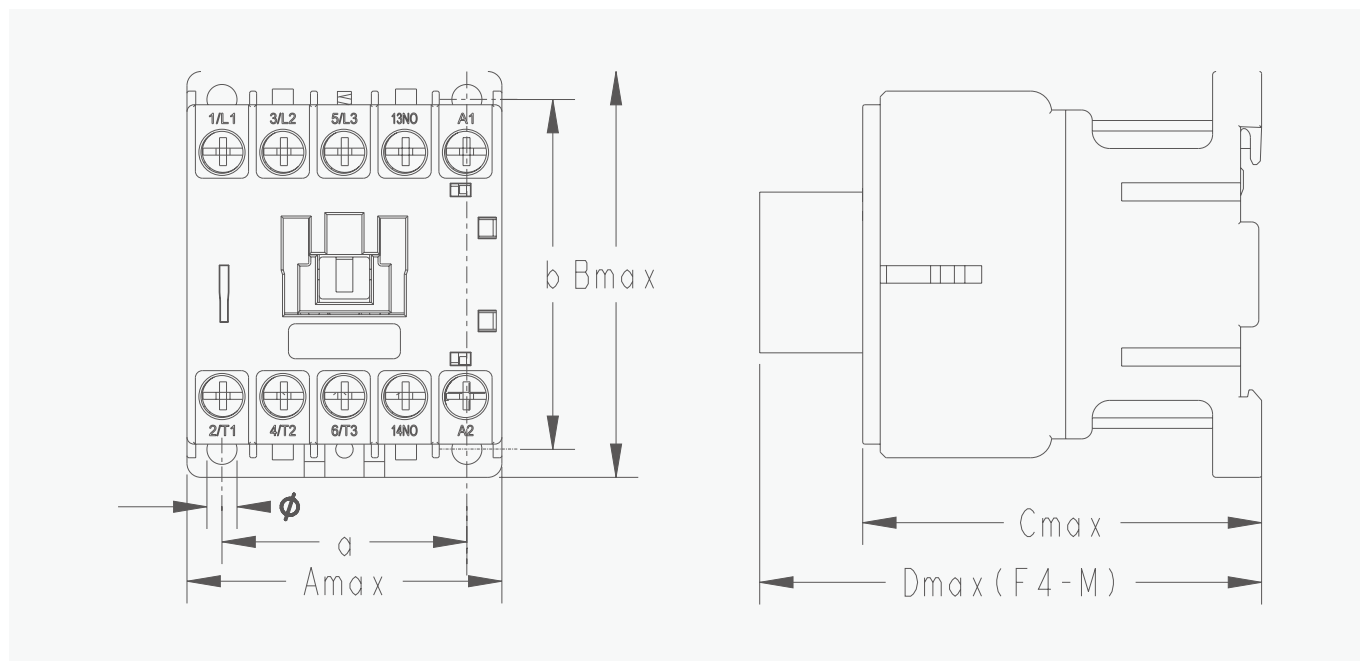

Type	A_{max}	B_{max}	C_{max}	D_{max}	a	b	Φ
CJX2s-M06-M16	45.5	59	58	94	35 ± 0.35	50 ± 0.48	4.2
CJX2s-M06/Z-M16/Z	45.5	59	70	106	35 ± 0.35	50 ± 0.48	4.2

Installation and overall dimensions of CJX2s-M06/N-M16/N series AC contactor

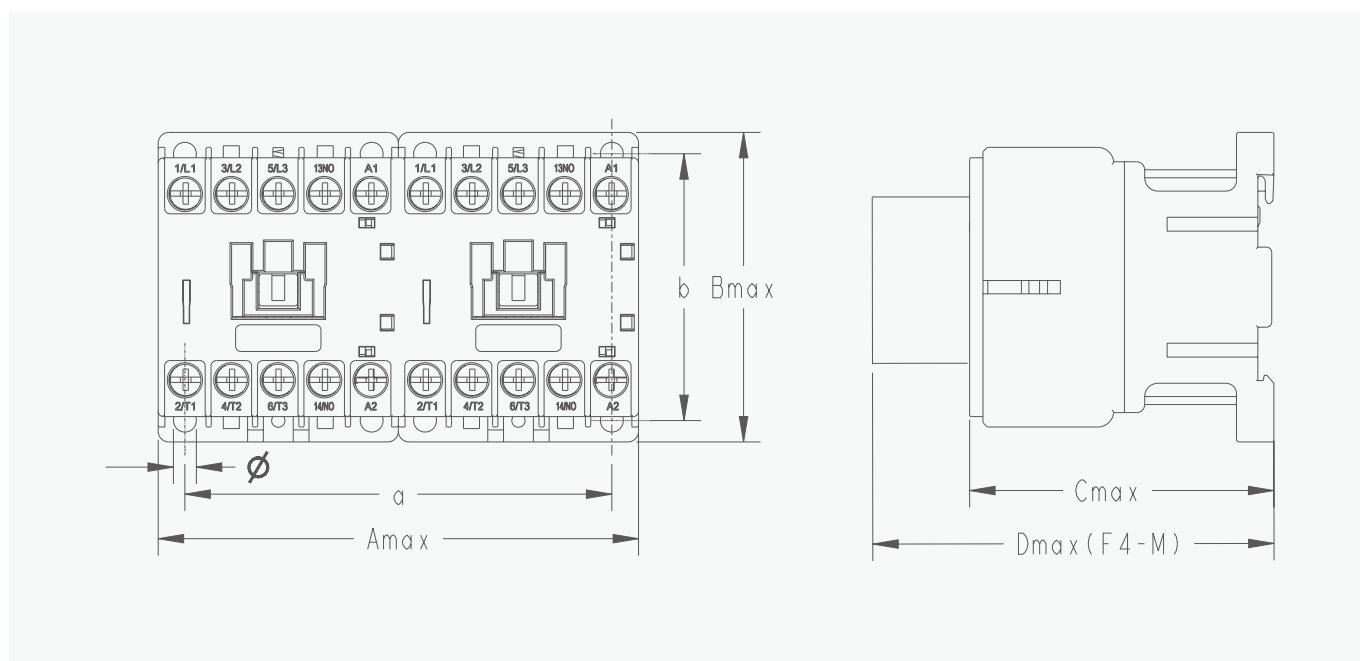

Type	A_{max}	B_{max}	C_{max}	D_{max}	a	b	Φ
CJX2s-M06-M16	91	59	58	94	80 ± 0.35	50 ± 0.48	4.2
CJX2s-M06/Z-M16/Z	91	59	70	106	35 ± 0.35	50 ± 0.48	4.2

C

Motor Control & Protection

CJX2s-M AC Contactor







F4-M Auxiliary contact group

Type	Product	Configuration of contacts	
		Number of N/O contact	Number of N/C contact
F4-M20 F4-M11 F4-M02		2 1 0	2 1 0
F4-M40 F4-M31 F4-M22 F4-M13 F4-M04		4 3 2 1 0	0 1 2 3 4

FS-M Surge suppression module







Model of Surge Suppression Module	Product	Control Voltage
FS-M		AC/DC:24V-48V AC/DC:380V-440V AC/DC:110V-240V

Derived Products When The Contactor is Assembled With Following Accessory Module

Derived products	Contactor	Accessorial modular	Picture
Reversing Contactor			
Auxiliary Contact			

Motor Control & Protection

CJX2s-M AC Contactor

Derived products	Contactor	Accessorial modular	Picture
Dust Cover		+ 	→ 
Electromagnetic Starter		+ 	→ 

C

CJX2s-M AC Contactor selection table

Motor power kW		Maximum operation current A (AC-3 380V/400V)	Number of contacts contained in the contactor body		Contactor model
380V/400V	660V/690V		NO	OFF	
2.2	3	6	1	0	CJX2s-M0610
2.2	3	6	0	1	CJX2s-M0601
2.2	3	6	0	0	CJX2s-M0604
2.2	3	6	0	0	CJX2s-M0608
4	4	9	1	0	CJX2s-M0910
4	4	9	0	1	CJX2s-M0901
4	4	9	0	0	CJX2s-M0904
4	4	9	0	0	CJX2s-M0908
5.5	4	12	1	0	CJX2s-M1210
5.5	4	12	0	1	CJX2s-M1201
5.5	4	12	0	0	CJX2s-M1204
5.5	4	12	0	0	CJX2s-M1208
7.5	4	16	1	0	CJX2s-M1610
7.5	4	16	0	1	CJX2s-M1601
7.5	4	16	0	0	CJX2s-M1604
7.5	4	16	0	0	CJX2s-M1608

Motor Control & Protection

CJX2s-M AC Contactor

CJX2s-M AC Contactor Coil voltage specification table

AC(V) 50Hz	24	36	48	110	127	220	380	415
AC(V) 60Hz	24	36	48	110	127	220	380	415
AC(V) 50/60Hz	24	36	48	110	127	220	380	415
DC(V)	12	24	38	48	110	127	220	-

Instructions for use of correction factors in high altitude areas

Altitude (m)	2000	3000	4000
Rated impulse withstand voltage correction factor	1	0.88	0.78
Rated operation current correction factor	1	0.92	0.90

Instructions for use under abnormal ambient temperature

Ambient temperature (°C)	55	60	65	70
Correction factor	1	0.93	0.875	0.75

C

YCK Air Conditioning Contactor



General


YCK air conditioning contactor is an electrical component used to control the start and stop of electrical equipment in an air conditioning system, such as the compressor and fan. The main function of the contactor is to supply power to various devices in the air conditioning system by controlling the circuit switch.

Application: YCK air conditioning contactors are mainly used in central air conditioning systems, residential air conditioners, commercial air conditioners, and other air conditioning equipment to control the start and stop of devices like compressors, fans, and condensers.

Standards: IEC 60947-4-1

Type designation

YC K -30 /2 220V

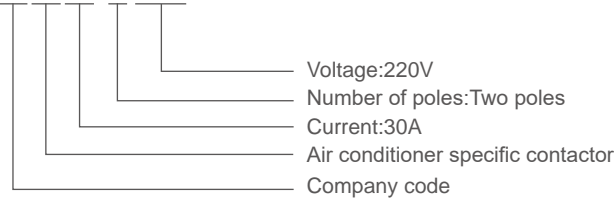

Product model: YCK-30/1, YCK-30/2, YCK-30/3, YCK-30/4, YCK-40/1, YCK-40/2, YCK-40/3, YCK-40/4, YCK-50/3, YCK-60/3, YCK-75/3, YCK-90/3

Operating conditions

1. Ambient temperature: -40°C~+65°C
2. Relative humidity: ≤20% at 40°C; ≤90% at 20°C
3. Altitude: ≤2000m
4. Environmental conditions: no harmful gases and vapors, no conductive or explosive dust, no severe mechanical vibration

Technical parameter

Dielectric Strength	Between contact and coil:	2200VAC
	Between poles:	2200VAC
	Between open contacts:	2200VAC
Ar extinguishing cover		Standard configuration
Insulation materials		130°C Class B
Temperature range		-40°C to +65°C, -40F to +150F
Weight		50-60FLA 0.91kg, 75-90FLA 1.81kg
Terminal type		Aluminum pressure wire box
Wiring size		50/60FLA crimping box 14-2 75/90FLA crimping box 14-1
Recommended locking torque	Crimping box	5.67N.m
	Quick connect terminal	Double .250 "insert or #6-32 screw/.250"insert
Coil terminal	Quick connect terminal	Double .250 "insert or #6-32 screw/.250"insert
	Main circuit terminal	Double .250 "insert



Motor Control & Protection

YCK Air Conditioning Contactor

Coil Voltage	YCK-30/1,YCK-40/1 One pole contactor				YCK-30/2,YCK-40/2 Two pole contactor			
	24	120	208/240	277	24	120	208/240	277
Coil resistance	18	420	1800	2500	11	237	1000	1600
Pull-in voltage	18	88	177	221	18	88	177	221
Release voltage	6-15	20-70	40-140	50-165	6-15	20-70	40-140	50-165
Power consumption of suction ·50Hz	31	31	31	31	33	33	33	33
Power consumption of suction ·60Hz	28	28	28	28	30	30	30	30
Maintain power consumption-50Hz	6	6	6	6	8	8	8	8
Maintain power consumption-60Hz	5	5	5	5	6.5	6.5	6.5	6.5
Maximum coil voltage	30	132	264	300	30	132	264	300

Coil Voltage	YCK-30/3,YCK-40/3 Triple pole contactor				YCK-30/4,YCK-40/4 Quadru pole contactor			
	24	120	208/240	277	24	120	208/240	277
Coil resistance	7	180	720	900	6	150	600	750
Pull-in voltage	18	88	177	221	18	88	177	220
Release voltage	6-15	20-70	40-140	50-165	6-15	20-70	40-140	65-185
Power consumption of suction ·50Hz	65	65	65	65	62	62	62	62
Power consumption of suction ·60Hz	60	60	60	60	59	59	59	59
Maintain power consumption-50Hz	7.5	7.5	7.5	7.5	9	9	9	9
Maintain power consumption-60Hz	6	6	6	6	7	7	6	7
Maximum coil voltage	30	132	264	300	30	132	264	300


Coil Voltage	YCK-50/3,YCK-60/3 contactor				YCK-75/3,YCK-90/3 contactor			
	24	120	208/240	277	24	120	208/240	277
Coil resistance	7	180	720	900	0.65	16	64	85
Pull-in voltage	18	93	177	235	18	88	177	220
Release voltage	6-15	20-70	40-140	50-165	6-15	20-70	40-110	65-185
Power consumption of suction ·50Hz	140	140	140	140	285	285	285	285
Power consumption of suction ·60Hz	132	132	132	132	240	240	240	240
Maintain power consumption-50Hz	20	20	20	20	42	42	42	42
Maintain power consumption-60Hz	14	14	14	14	27	27	27	27
Maximum coil voltage	30	132	264	300	30	132	264	300

Motor Control & Protection


YCK Air Conditioning Contactor

Overall and mounting dimensions(mm)


Dimensions of one pole in inches

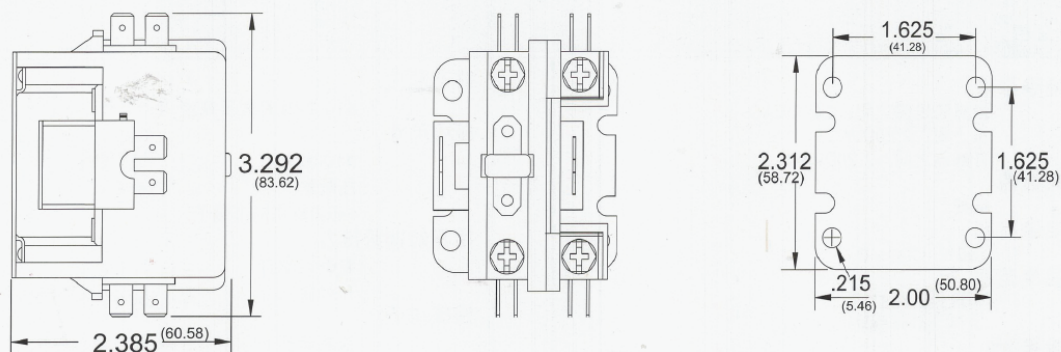

Dimensions of two pole in inches

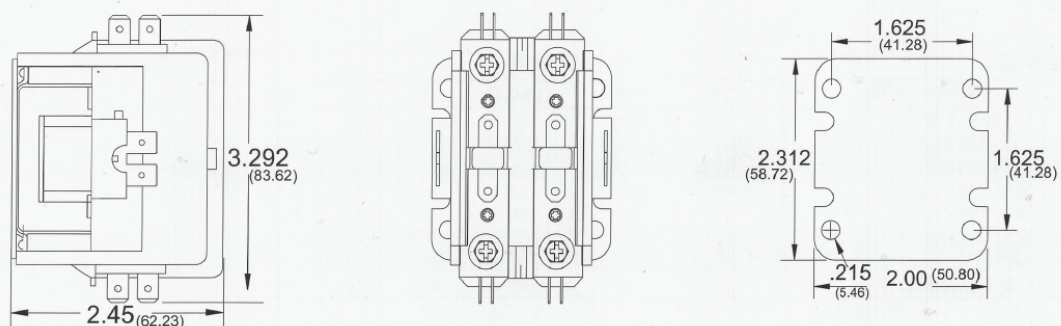


Three pole external dimensions in inches

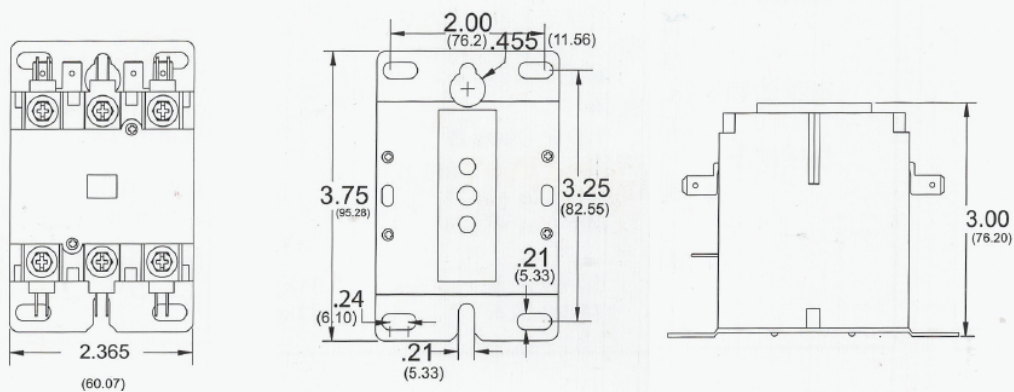


Motor Control & Protection

YCK Air Conditioning Contactor


50-60FLA external dimensions in inches

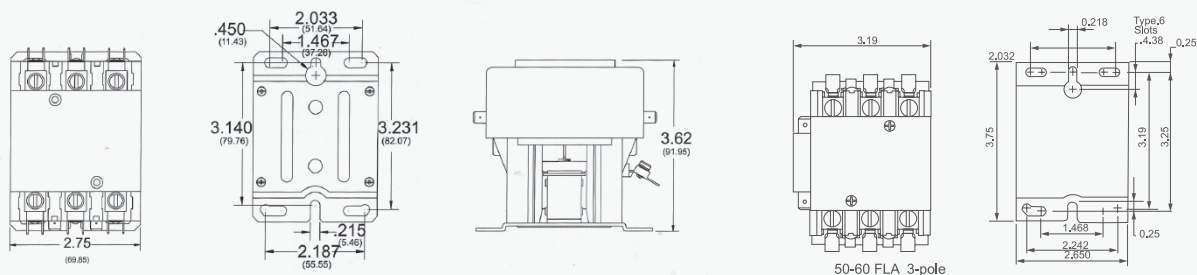

75-90FLA external dimensions in inches

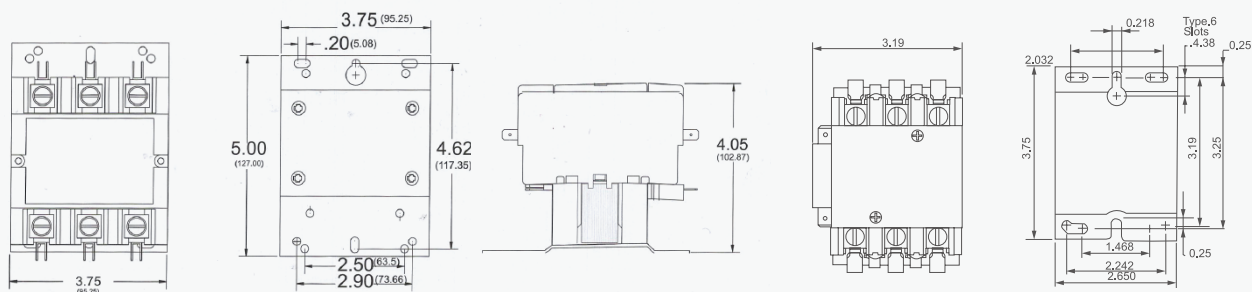

Quadrupole dimensions in inches

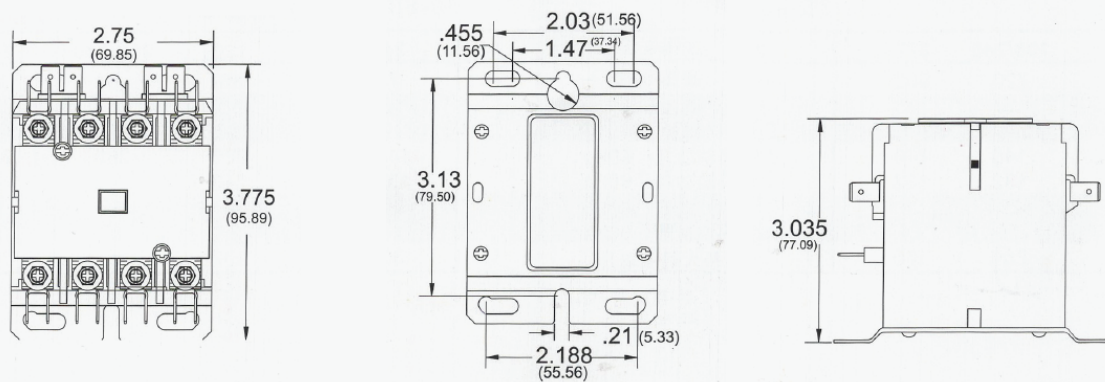

Motor Control & Protection

CJX2-D170 Contactor



General

CJX2-D series AC Contactor is suitable for using in the circuits of rated voltage up to 1000V AC 50Hz/60Hz, rated current up to 170A, for making, breaking, frequently starting & controlling the AC motor. The Contactor is produced according to IEC 60947-4-1.

Type designation

CJX2 - D 170 AC/DC100-250V

Company code	Contactor	Current	Voltage
CJX2	- D	170	AC/DC100-250V
Company code	Contactor	170A	AC/DC100-250V

Type: AC220V, AC380V, AC/DC100-250V

Operating Conditions

1. Ambient temperature: -5°C~+40°C
2. Relative humidity: ≤20% at 40°C; ≤90% at 20°C
3. Altitude: ≤2000m
4. Environmental conditions: no harmful gases and vapors, no conductive or explosive dust, no severe mechanical vibration

Motor Control & Protection


CJX2-D170 Contactor

Technical data

Type		Unit	CJX2-D115	CJX2-D150	CJX2-D170
Rated current		A	115	150	170
Rated thermal current		A	200	220	250
3-phase motor with rated power	220/240V	KW	30	40	55
	380/400V	KW	55	75	90
	400V	KW	59	80	100
	500V	KW	75	90	110
	600/690V	KW	80	100	110
1000V		KW	75	90	100
Power connection wire section		mm	120	120	120

Overall and mounting dimensions(mm)

Type	A	B	C	P	Q	S	Q1
CJX2-D115	158	120	132	35	60	17	25
CJX2-D150	158	120	132	35	60	17	25
CJX2-D170	158	120	132	35	60	17	25

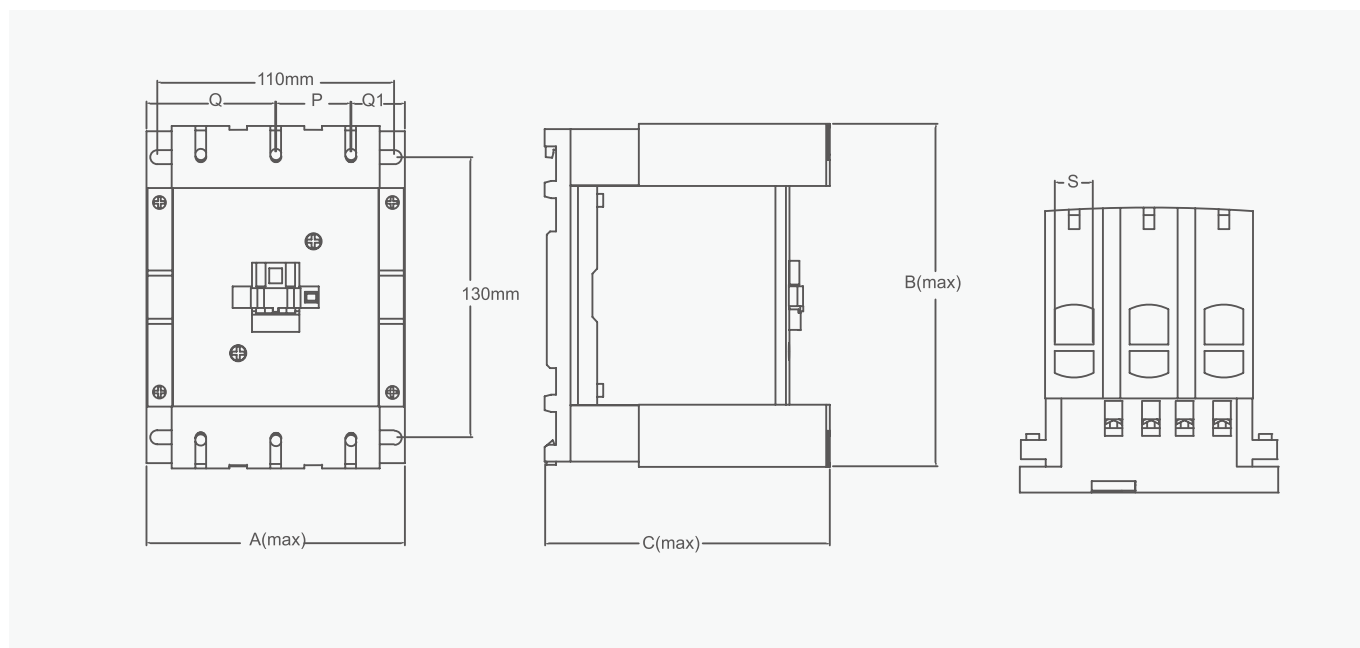

Motor Control & Protection

JR28s(JR28) Thermal Relay



JR28



JR28s

General

JR28s series thermal overload relay are suitable for overload and phase-failure protection of AC motors with frequency of 50/60Hz, voltage up to 690V, current up to 0.1-630A under 8-hours duty or uninterrupted duty.

Functions provided by these relays, are phase-failure protection, ON/OFF indication, temperature compensation, and manual/ automatic reset.

Standard: IEC 60947-4-1

The relays can be mounted onto contactors or installed as single units.

Technical data

NO.	Times the setting current	Release time	Test condition	
1	1.05	>2h	Start from Cold status	
2	1.2	<2h	Start from Heat status right after item no.1	
3	1.5	<2min		
4	7.2	2s<Tp≤10s	Start from Cold status	
	Any two phases	Another phase		
5	1.0	0.9	>2h	Start from Cold status
6	1.15	0	<2h	Start from Heat status right after item no.5

C


Selection

Products appearance	Rated current (A)	Matched fuse specifications(A)		Matched contactor model
		aM	gG	
	0.1~0.16	0.25	2	CJX2-K06 CJX2-K19 CJX2-K12
	0.16~0.25	0.5	2	
	0.25~0.4	1	2	
	0.4~0.63	1	2	
	0.63~1	2	4	
	1~1.6	2	4	
	1.25~2	4	6	
	1.6~2.5	4	6	
	2.5~4	6	10	
	4~6	8	16	
	5.5~8	12	20	
	7~10	12	20	
9~13	16	25		

Motor Control & Protection

JR28s(JR28) Thermal Relay



Selection



Products appearance	Rated current (A)	Matched fuse specifications(A)		Matched contactor model
		aM	gG	
 <p>JR28s-25 JR28-25 (LR2-D13)</p>	0.1~0.16	0.25	2	CJX2s-09/CJX2i-09 CJX2s-12/CJX2i-12 CJX2s-18/CJX2i-18 CJX2s-25/CJX2i-25 CJX2-D09 CJX2-D12 ▶ CJX2-D18 CJX2-D25
	0.16~0.25	0.5	2	
	0.25~0.4	1	2	
	0.4~0.63	1	2	
	0.63~1	2	4	
	1~1.6	2	4	
	1.25~2	4	6	
	1.6~2.5	4	6	
	2.5~4	6	10	
	4~6	8	16	
	5.5~8	12	20	
	7~10	12	20	
	9~13	16	25	
	12~18	20	35	
	17~25	25	50	
23~32	25	50		
 <p>JR28s-36 JR28-36 (LR2-D23)</p>	23~32	40	63	CJX2s-32/CJX2i-32 CJX2s-38/CJX2i-38 ▶ CJX2-D32
	28~36	40	80	
 <p>JR28s-93 JR28-93 (LR2-D33)</p>	23~32	40	63	CJX2s-40/CJX2i-40 CJX2s-50/CJX2i-50 CJX2s-65/CJX2i-65 CJX2s-80/CJX2i-80 CJX2s-95/CJX2i-95 CJX2-D40 CJX2-D50 ▶ CJX2-D65 CJX2-D80 CJX2-D95
	30~40	40	100	
	37~50	63	100	
	48~65	63	100	
	55~70	80	125	
	63~80	80	125	
	80~93	100	160	
 <p>JR28s-150 JR28-150</p>	80~104	125	200	CJX2F-115 CJX2F-150 CJX2F-170
	95~120	125	224	
	110~150	160	250	

Motor Control & Protection

JR28s(JR28) Thermal Relay

Selection

Products appearance	Rated current (A)	Matched fuse specifications(A)		Matched contactor model
		aM	gG	
 JR28s-200	80~125	125	200	CJX2-F115 CJX2-F150 CJX2-F185 CJX2-F225
	100~160	160	250	
	125~200	200	315	
 JR28s-630	160~250	250	400	CJX2-F185 CJX2-F225 CJX2-F265 CJX2-F330 CJX2-F400 CJX2-F500 CJX2-F630
	200~315	315	500	
	250~400	400	630	
	315~500	500	800	
	400~630	630	800	

Products appearance	Rated current (A)	Matched fuse specifications(A)		Matched contactor model
		aM	gG	
 LR9-F53	30~50	63	100	CJX2-F115 CJX2-F150 CJX2-F185 CJX2-F225
	40~80	80	125	
	60~100	125	200	
	90~150	160	250	
	132~220	250	400	
 LR9-F73	200~330	400	630	CJX2-F225 CJX2-F265 CJX2-F330 CJX2-F400 CJX2-F500 CJX2-F630
	300~500	500	800	
	380~630	630	800	


C

Motor Control & Protection


JR28s(JR28) Thermal Relay

Overall and mounting dimensions(mm)


JR28s(JR28)-25

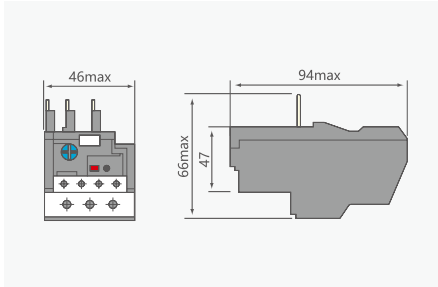


JR28s(JR28)-36

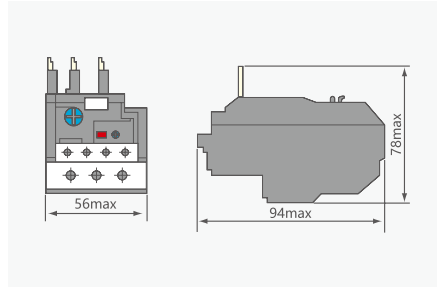


JR28s(JR28)-93

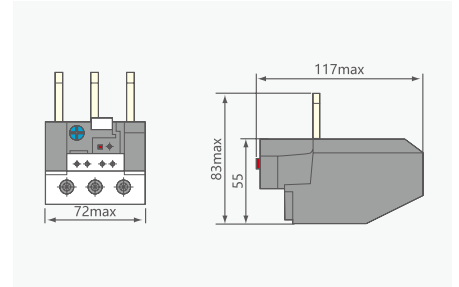


JR28s-150

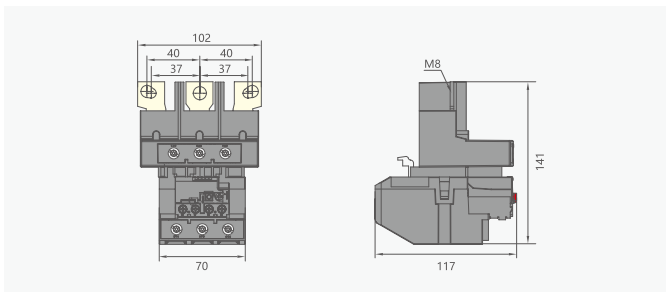


JR28s-200

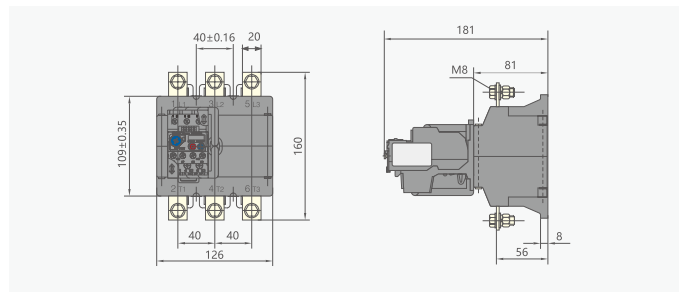


JR28s-630

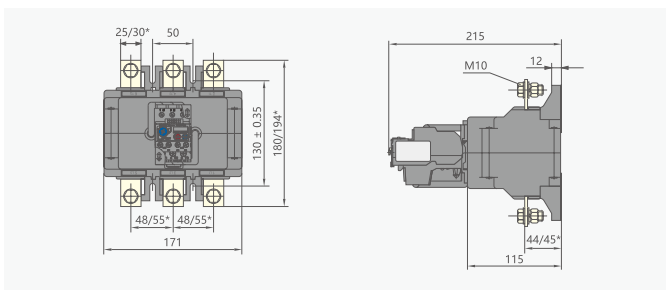


JR28-11.5

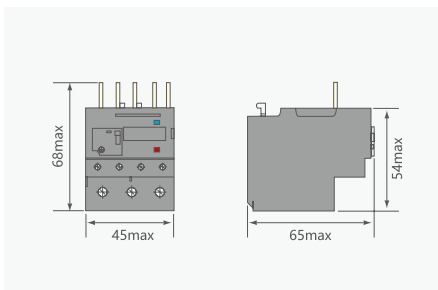

JR28s-25 with mounting base

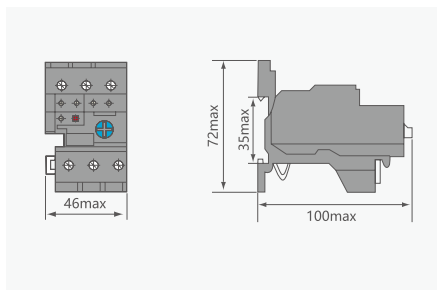


JR28s-36 with mounting base

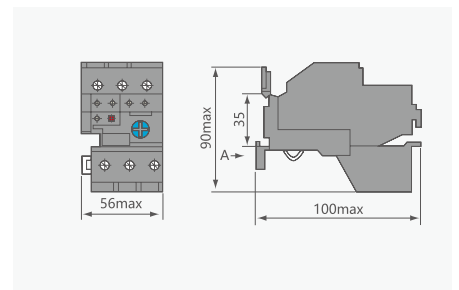


Motor Control & Protection

JR28s(JR28) Thermal Relay


JR28s-93 with mounting base

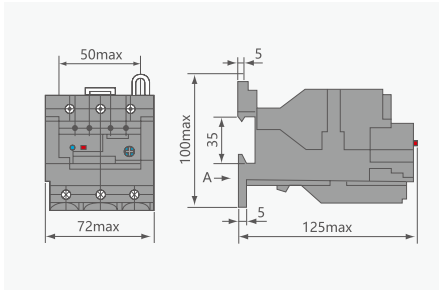

LR9-F53

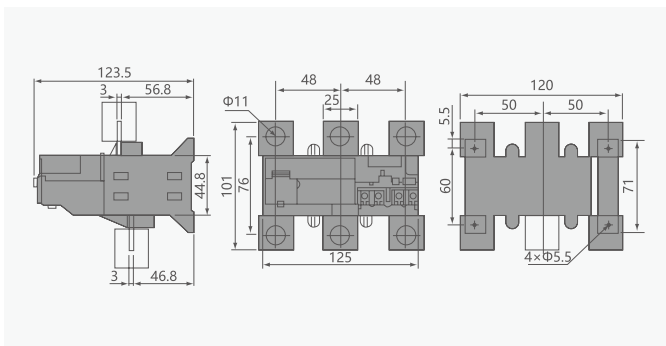

LR9-F73

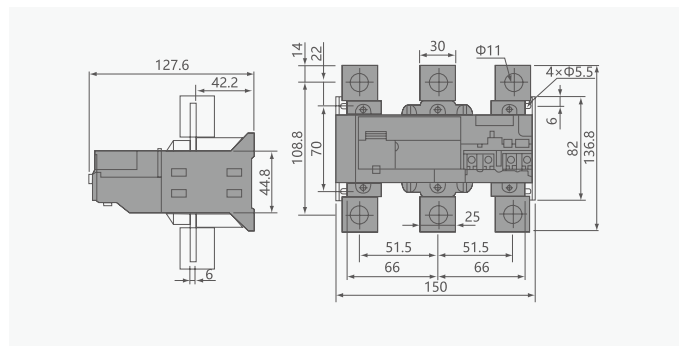

C

YCQ7 Series

Magnetic Starter



CE IP55

- High compatibility and high reliability
- Convenient maintenance and repair

CNC
ELECTRIC


YCQ7 Magnetic Starter

Overview





High reliability

Silver rivet and hot riveting process make electrical contact more reliable



High compatibility

Optional for XB2-E series flat button, bullet button, Flat-headed button with light etc.

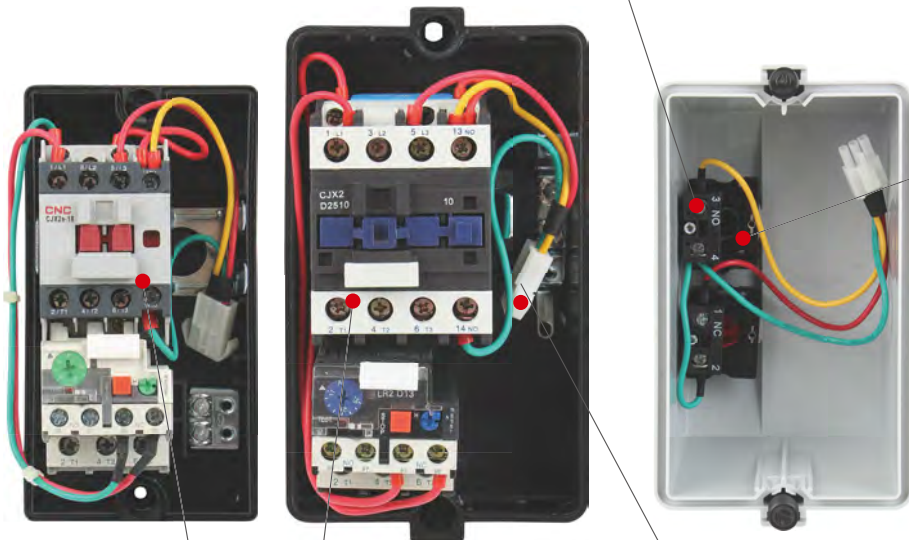

Convenient maintenance and repair

It is more convenient to replace the components by connecting the electrical circuit with connectors.



More options

CJX2-D and CJX2s series AC contactors are optional

YCQ7 Magnetic Starter




General

YCQ7 series magnetic starter is suitable for those circuits whose rated voltage is up to 660V, AC 50Hz or 60Hz, rated control power to 45kW and current to 95A. It is used to control the direct start and stop of the motor, and the starter with thermal overload relay protects the motor from overload and phase failure.

Standard: IEC/EN 60947-4-1.

Type designation

YC Q 7 - □

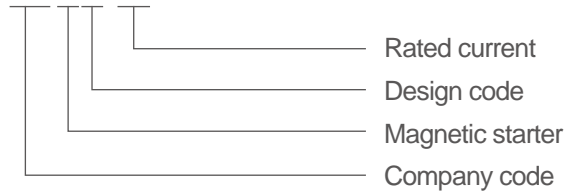

Operating Conditions

1. Altitude: ≤2000m.
2. Ambient air temperature: -5°C~+40°C, average temperature of 24 hours must be below +35°C.
3. Relative humidity: The maximum temperature is 40 degrees, and the relative humidity of the air should not exceed 50%. Higher relative humidity can be allowed at lower temperatures. The average minimum temperature in the wettest month must be below 25°C and the maximum relative humidity of the month should not exceed 90%. If the humidity changes because of occasional gel generation, it should be eliminated.
4. Installation position: The installation degree of the tilt and vertical plane should not exceed 5°.
5. In a non-explosive hazardous medium and without enough position in the medium to corrode metals, destroy insulating gases and conductor dust.
6. Where there is rain and snow protection and no steam.
7. Shock vibration: Products should be installed and used without severe shake, shock and vibration of the place.

Technical data

1. Coil rated control power supply voltage U_s can be divided into AC 50Hz or 60Hz: 36V, 110V, 220V, 380V.
2. Operating condition: Coil pull-in voltage is (85%~110%) U_s ; Release voltage is (20%~75%) U_s .

Motor Control & Protection

YCQ7 Magnetic Starter

Table 1


Type	Rated current I _e A	Maximum power duty (kW)			Matched AC contactor type	Matched thermal relay	Setting current range (A)
		660V	380V	220V			
YCQ7-09	9	5.5	4	2.2	CJX2-D09/CJX2s(CJX2i)-09	JR28-25 JR28s-25	2.5~4, 4~6, 5.5~8
YCQ7-12	12	7.5	5.5	3	CJX2-D12/CJX2s(CJX2i)-12	JR28-25 JR28s-25	7~10, 9~13
YCQ7-18	18	10	7.5	4	CJX2-D18/CJX2s(CJX2i)-18		12~18
YCQ7-25	25	15	11	5.5	CJX2-D25/CJX2s(CJX2i)-25		17~25
YCQ7-32	32	18.5	15	7.5	CJX2-D32/CJX2s(CJX2i)-32		23~32
YCQ7-40	40	18.5	18.5	11	CJX2-D40/CJX2s(CJX2i)-40	JR28-93 JR28s-93	23~32, 30~40 37~50, 48~65 55~70, 63~80 80~93
YCQ7-50	50	22	22	15	CJX2-D50/CJX2s(CJX2i)-50		
YCQ7-65	65	30	30	18.5	CJX2-D65/CJX2s(CJX2i)-65		
YCQ7-80	80	37	37	22	CJX2-D80/CJX2s(CJX2i)-80		
YCQ7-95	95	45	45	25	CJX2-D95/CJX2s(CJX2i)-90		

Product features

The starter adopts a protective structure with a protective cover of IP55 and is internally composed of a CJX2 AC contactor and a JR28 thermal overload relay. The entry and exit wiring of the starter adopts the knockout type wiring hole, and the user can selectively knock and connect the four knockout holes according to the wiring requirements. The cover and the base of the starter can be completely separated, and it is very convenient for users to install and maintain; the button adopts the XB2 series push button switch assembly to realize the start and stop of the starter, and it will be safe and reliable.

In order to improve the protective performance of the starter, the starter must be installed vertically. The mounting screws should be selected according to the size of the mounting hole. The screws should not be less than M5, and spring washers, flat washers and sealing rubber rings should be added to ensure the fastening of the starter. In addition, the knockout terminal holes should be equipped with corresponding waterproof terminals.

Overall and mounting dimensions(mm)

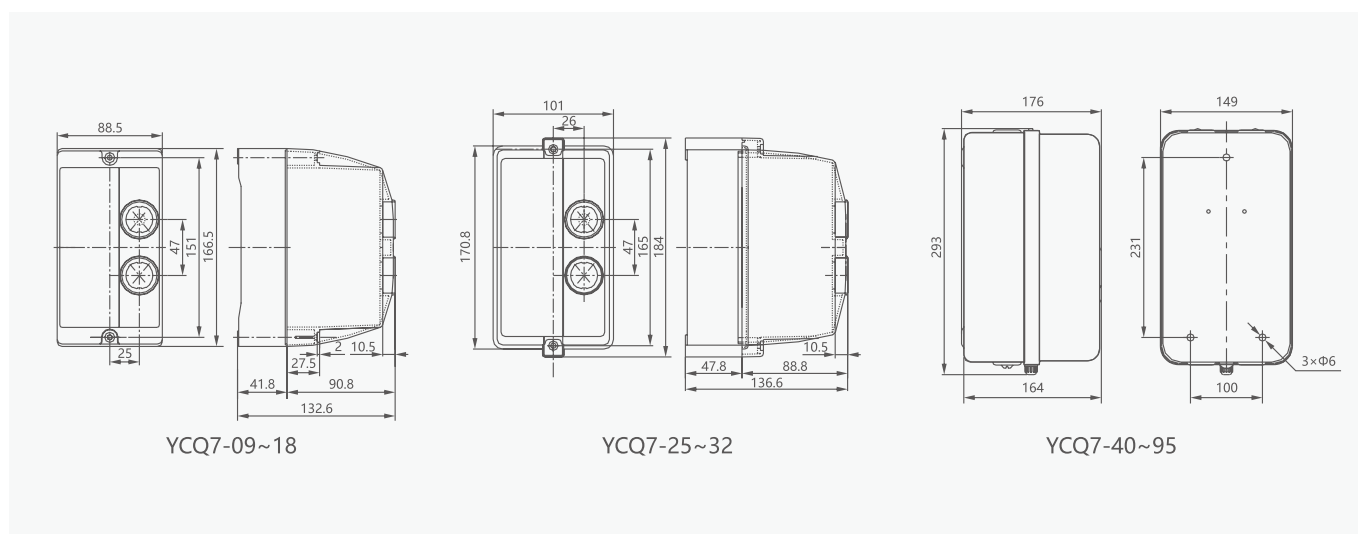

YCQD7 Series Integrated Star Delta Starter




General

The YCQD7 series intelligent integrated star delta starter (hereinafter referred to as the starter) is suitable for three-phase squirrel cage induction motors with AC 50Hz, rated voltage of 380V/400V, and rated working current of up to 265A (phase current when the starter is delta connected), controlling power up to 90kW. It is used to control the start, operation, and stop of the stator winding from star to delta conversion, in order to reduce the impact of starting current and motor starting on the transmission network.

The starter adopts a modular design and integrated structure, integrating contactors, intelligent controllers, and auxiliary contacts. The intelligent controller can automatically control the starter to run according to the predetermined program, thereby completing the star delta starting of the motor.

Type designation

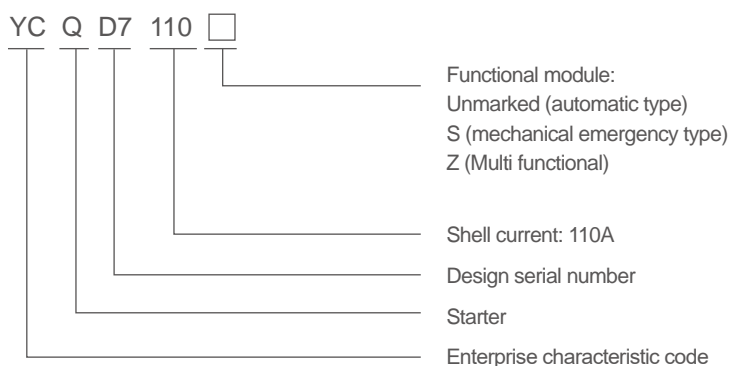

Technical data

Parameter	Unit	YCQD7-265															
Rated working current:Ie(AC -3)	A	18	25	32	40	50	65	75	85	95	100	110	120	160	185	225	265
Rated working voltage:Ue	V	380V/400V															
Rated insulation voltage:Ui	V	600				800				1000							
Number of poles	P	3															
Mechanical lifespan	ten thousand cycles	600															
Mechanical emergency (manual operation)	second	10000															
Suggest controllable operating power of three-phase squirrel cage motor (AC-3)	kw	11	18.5	22	30	37	45	55	75	90	110	132	160	185			
Supporting fuse body	A	20	32	63	80	100	125	160	200	250	300						
Ability of wiring terminals to connect wires	mm ²	16				35	50				75		150				
Coil parameters	Rated control voltageUs	220V/380V															
	pull-in voltage	80%~110%															
	Release voltage	20%~75%															
	Coil suction	230															
	Maintain power	VA	19				32				92						

Motor Control & Protection

YCQD7 Series Integrated Star Delta Starter

Technical data

Function	Automatic type	Smechanical emergency type	Zmultifunctional
Star Triangle Conversion	■	■	■
Adjustable star running time	■	■	■
Mechanical emergency (manual forced start)	-	■	-
Overload protection	-	-	■
Locked rotor protection	-	-	■
Phase loss protection	-	-	■
Three-phase imbalance protection	-	-	■
Overvoltage protection	-	-	■
Undervoltage protection	-	-	■
Trouble display	-	-	■
Fault alarm	-	-	■
Status display	-	-	■
Communication function	-	-	□

Annotation: - Indicates not possessing, □ Indicating optional options, ■ Indicating standard configuration

Normal working and installation conditions

The altitude of the installation site shall not exceed 2000m.

The upper limit value of the normal operating environment temperature shall not exceed +40 °C, the lower limit value shall not be lower than -5 °C, and the average temperature value within 24 hours shall not exceed +35 °C; When the ambient temperature exceeds the range, users need to negotiate with the manufacturer.

Vertically installed starters have power terminals facing upwards and load terminals facing downwards; The inclination angle between the installation surface and the vertical surface of all starters shall not exceed $\pm 5^\circ$, which does not affect their performance.

No abnormal vibration or impact.

Pollution level: Level 3.

Fixation method: screw installation.

Structural features and working principles

Star Delta Start: When the control coil is energized with a 220V control voltage, the main contactor of the product closes, forming a star circuit with the star contactor. The motor starts running at reduced voltage. When the operating time reaches the set switching time and the motor speed approaches normal speed, the main contactor automatically disconnects and then simultaneously closes with the angle contactor, forming a triangular circuit, and the motor runs at full voltage.

Mechanical emergency: When the signal line or the control line of the fire pump control box malfunctions, making it impossible to automatically or manually start the fire pump, the mechanical emergency start device on the fire pump control box door can be used to manually close the main and corner contactors of the fire pump to start the fire water pump.



Motor Control & Protection

YCQD7 Series Integrated Star Delta Starter



Appearance and installation dimensions

Automatic Star Delta Starters

YCQD7-110 65A, 75A, 85A, 95A automatic models(S)

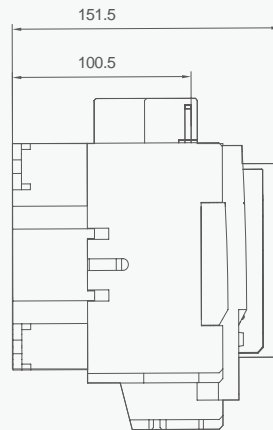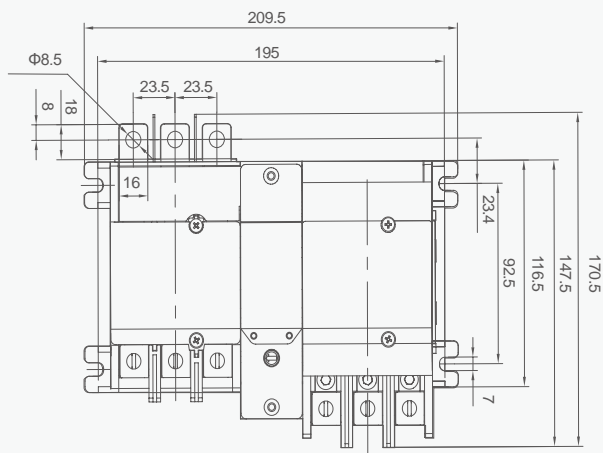

YCQD7-110 100A, 110A automatic type(S)

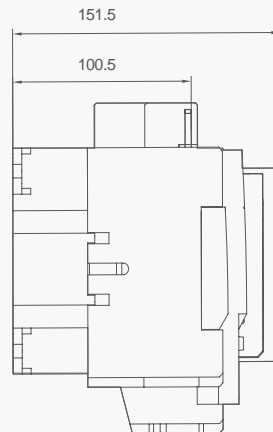
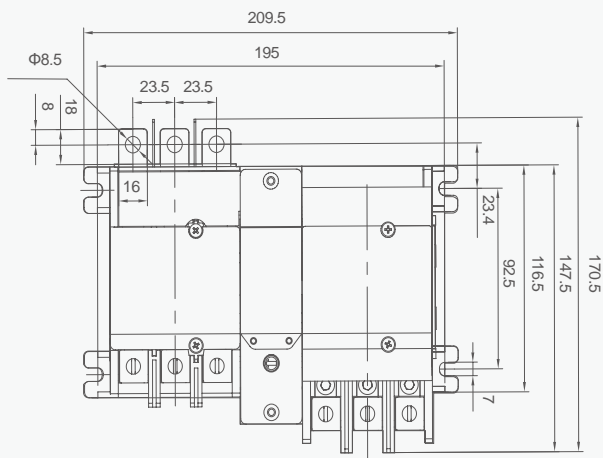


Motor Control & Protection

YCQD7 Series Integrated Star Delta Starter

Mechanical emergency star delta starter



YCQD7-110 65A, 75A, 85A, 95A mechanical emergency type(Z)

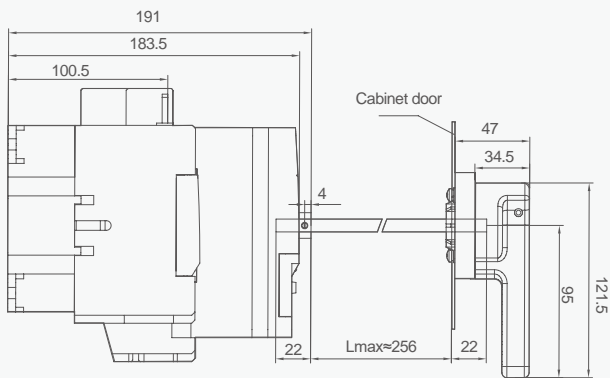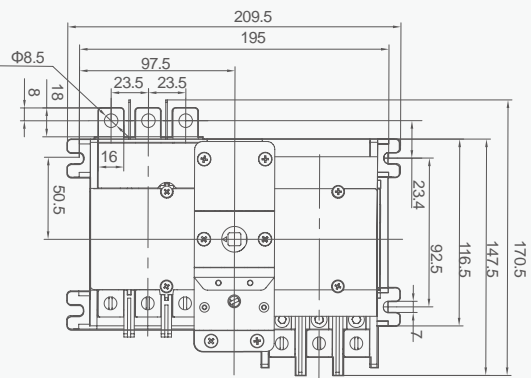

(Handle A with padlock function)

Number	External dimension type	Handle length
1	Handle A with padlock function	L=122mm
2	Handle B with padlock function	L=152mm
3	Equipped with lock function C	L=140mm

YCQD7-110 100A, 110A mechanical emergency type

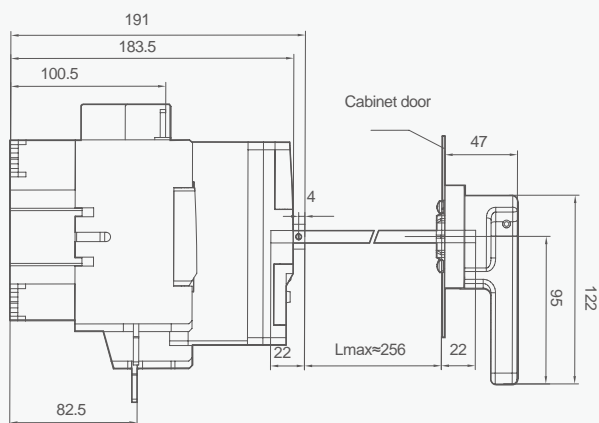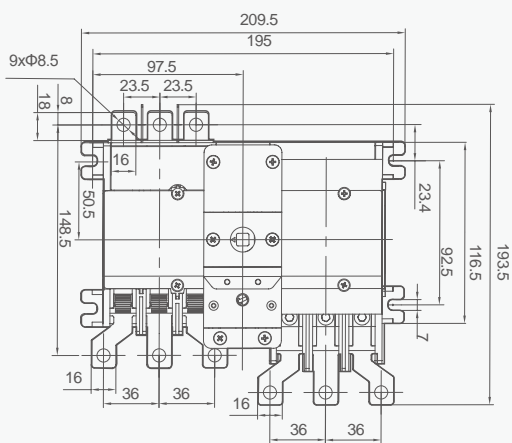


(Handle A with padlock function)


Motor Control & Protection

YCQD7 Series Integrated Star Delta Starter


Opening diagram of handle A and B with padlock function

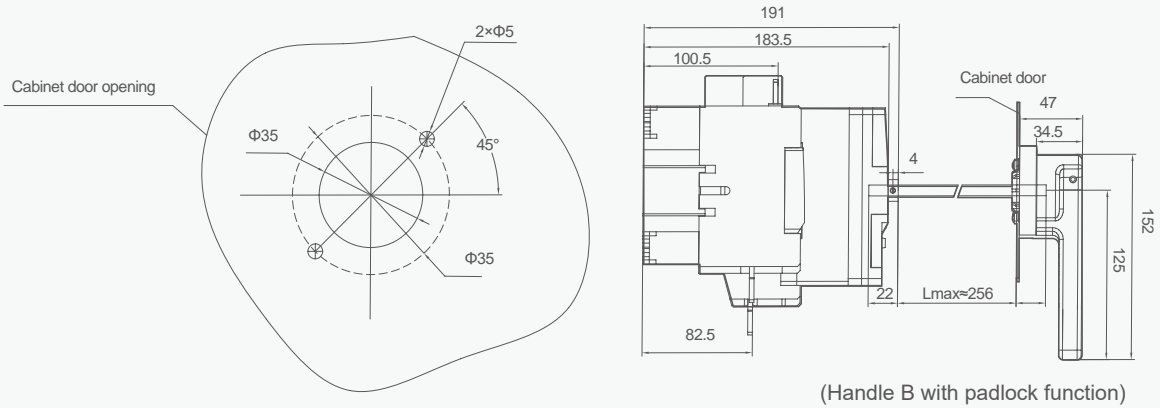

YCQD7-110 65A, 75A, 85A, 95A mechanical emergency type

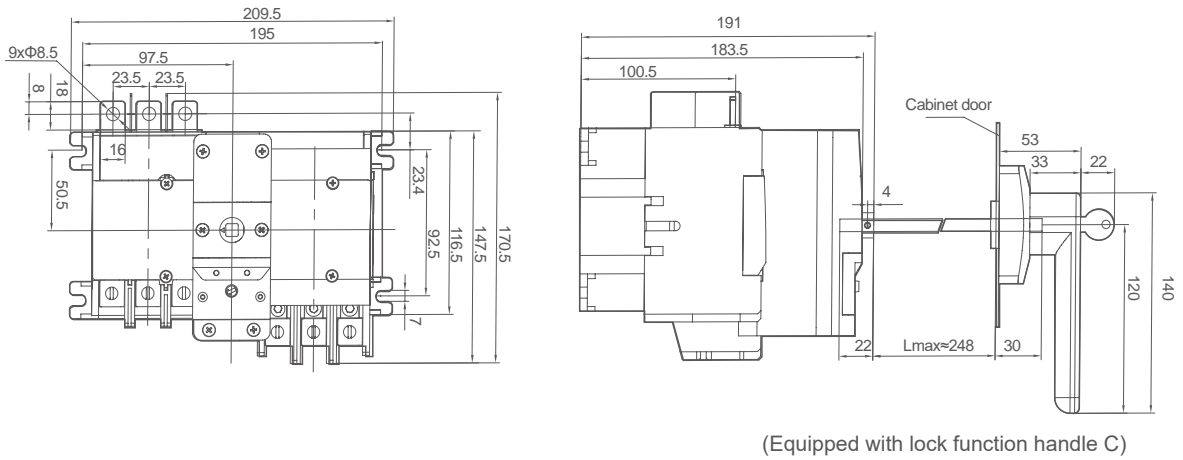


YCQD7-110 100A, 110A mechanical emergency type

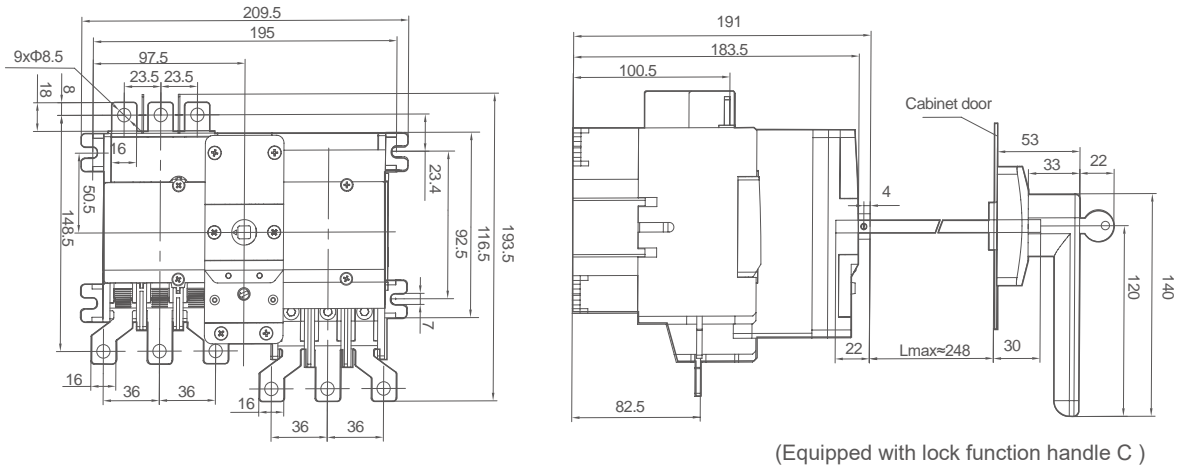


YCQD7 Series Integrated Star Delta Starter

Opening diagram of handle C with built-in lock function

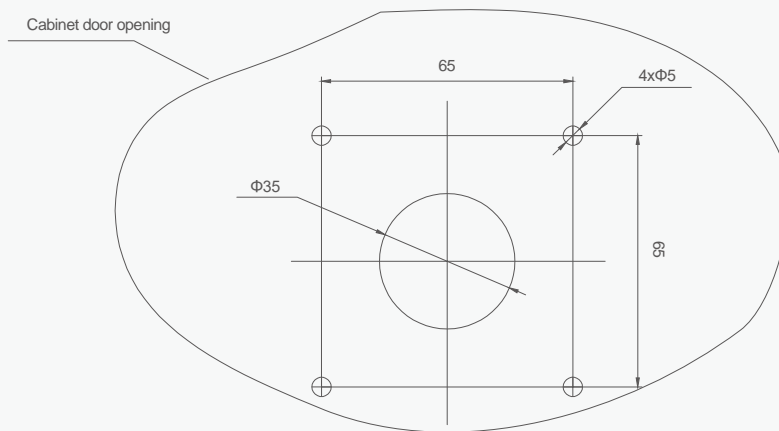

YCQD7 multifunctional model

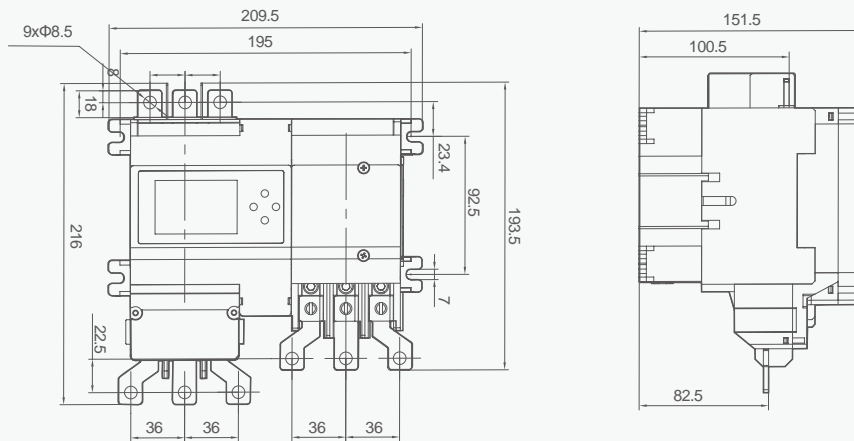

YCQJ7 Motor Controller




General

YCQJ7 series motor controller (hereinafter referred to as controller) is mainly used in circuits with a frequency of AC 50Hz (or 60Hz), a rated operational voltage of up to 380V and a rated control power of up to 18.5kW (current up to 38A) to control the direct start and stop of water pumps or motors, provide motors with overload and phase failure protection, and realize automatic liquid level control for civil water towers and reservoirs. This product is not applicable to the liquid level control of low-conductivity liquids, such as oil, purified water, inflammable and explosive chemical liquids and high-density sewage.

Standards: IEC 60947-4-1.

Type designation

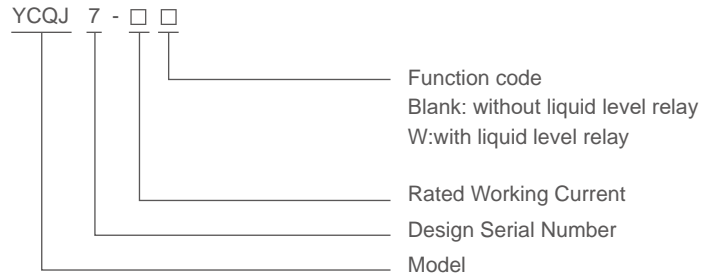

Operating conditions

1. Altitude: the altitude of the mounting location should not exceed 2000m;
2. Ambient temperature: -5°C~+40°C, and the average temperature in 24h should not exceed +35°C;
3. Atmospheric conditions: The relative air humidity at the mounting location should not exceed 50% at the maximum
4. temperature of +40°C. The relative humidity may be higher at lower temperatures. Special measures should be taken if condensation occurs on the product occasionally due to temperature variation;
5. Pollution degree: 3;
6. Installation category: III;
7. In places where there is no significant vibration or impact;
8. In non-explosive media that do not contain a sufficient amount of gas or dust to cause metal corrosion or insulation failure;
9. In places where rain and snow protection is provided;
10. The inclination from the vertical plane should not exceed 5°

Features

The controller consists of a CJX2s series Ac contactor, a JD-8 series motor comprehensive protector and an YCL8 liquid level relay in a protective enclosure and is divided into two types, with liquid level relay and without liquid level relay. Products with liquid level relay are used to control the start and stop and automatic pumping and drainage of water pumps and provide overload and phase failure protection. Products without liquid level relay are used to control the start and stop of motors and provide overload and phase failure protection.

Setting of the motor comprehensive protector in the controller is required before it is connected and put into use.

Motor Control & Protection

YCQJ7 Motor Controller

Technical data

Main data and technical characteristics

Type	Conventional heating current (A)	Max. rated power (kW)		Model of matching AC contactor	Model of matching motor protector	Setting current range (A)	Number of turns of protector (turn)
		AC-3					
		380V	220V				
YCQJ7 0.72A~2.4A	2.4	1.1	0.55	CJX2s-09	JD-8/0.5A~5A	0.72~2.4	5
YCQJ7-W 0.72A~2.4A							
YCQJ7 3.5A~11A	12	5.5	3	CJX2s-12	JD-8/2A~20A	3.5~11	1
YCQJ7-W 3.5A~11A							
YCQJ7 10A~16A	16	7.5	4	CJX2s-18	JD-8/2A~20A	10~16	1
YCQJ7-W 10A~16A							
YCQJ7 20A~25A	25	11	5.5	CJX2s-25	JD-8/20A~80A	20~25	1
YCQJ7-W 20A~25A							
YCQJ7 30A~38A	38	18.5	9	CJX2s-38	JD-8/20A~80A	30~38	1
YCQJ7-W 30A~38A							

- Rated control supply voltage U_s : AC220V, AC380V.
- Protection degree: IP55.
- Protection characteristics of the controller.
 - Phase failure protection characteristics of the controller: In case of failure of any phase of the three-phase main circuit passing through the center hole of the motor comprehensive protector in the controller, the motor comprehensive protector operates for a period of $\leq 5s$.
 - Overload protection characteristics of the controller under balanced three-phase load.

No.	Setting current multiple	Operation time			Starting conditions
1	1.05	No operation within 2h			Cold state start
2	1.2	Operation within 2h			Start after No.1
3	1.5	Tripping class	30	$\leq 12min$	Start after applying a 1.0 times setting current for 2h
4	7.2	Tripping class	30	$9s < T_p \leq 30s$	Cold state start

- 4.5 Down-lead distance of liquid level control electrode: 200m max.
- 4.6 Mounting type: installation type.


C

Motor Control & Protection


YCQJ7 Motor Controller

Wiring diagram


a. Connection diagram of YCQJ7-W in case both the control circuit voltage and the main circuit voltage are AC380V

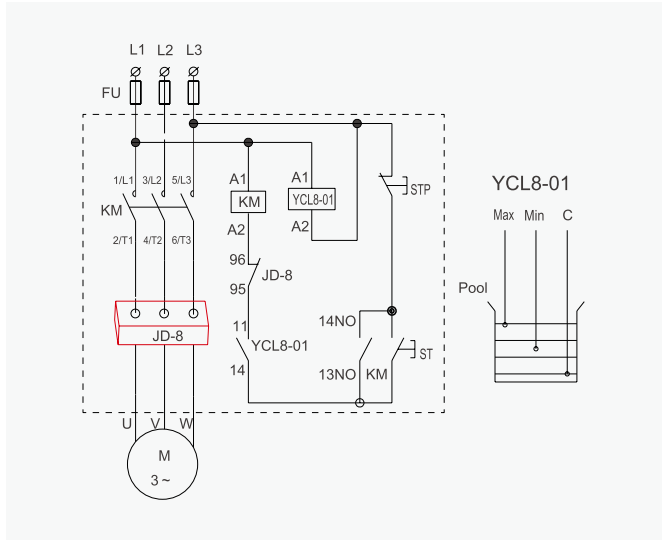


b. Connection diagram of YCQJ7-W in case the main circuit voltage is AC380V and the control circuit voltage is AC220V

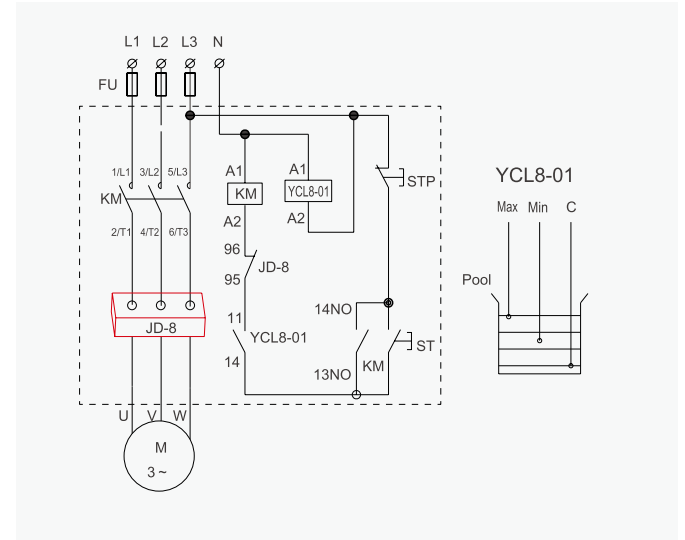

c. Connection diagram of YCQJ7 in case both the control circuit voltage and the main circuit voltage are AC380V

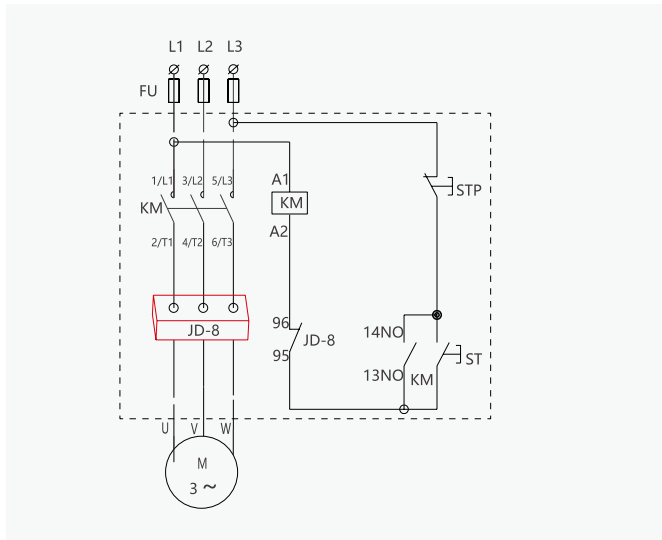


d. Connection diagram of YCQJ7 in case the main circuit voltage is AC380V and the control circuit voltage is AC220V

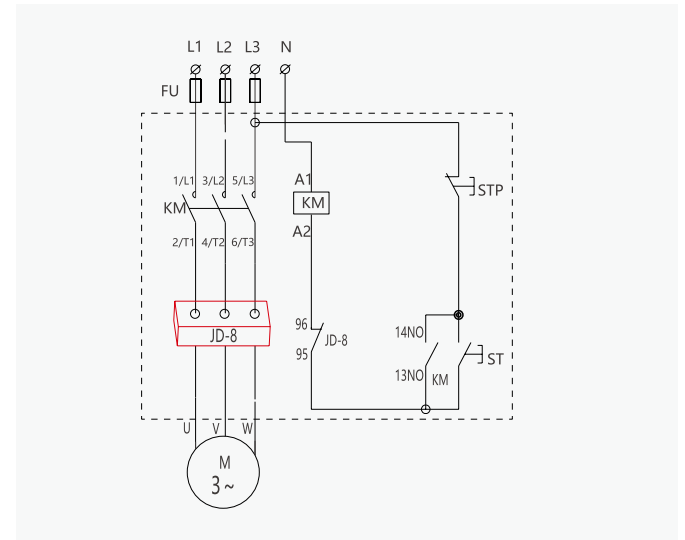

Motor Control & Protection

YCQJ7 Motor Controller

Overall and mounting dimensions(mm)

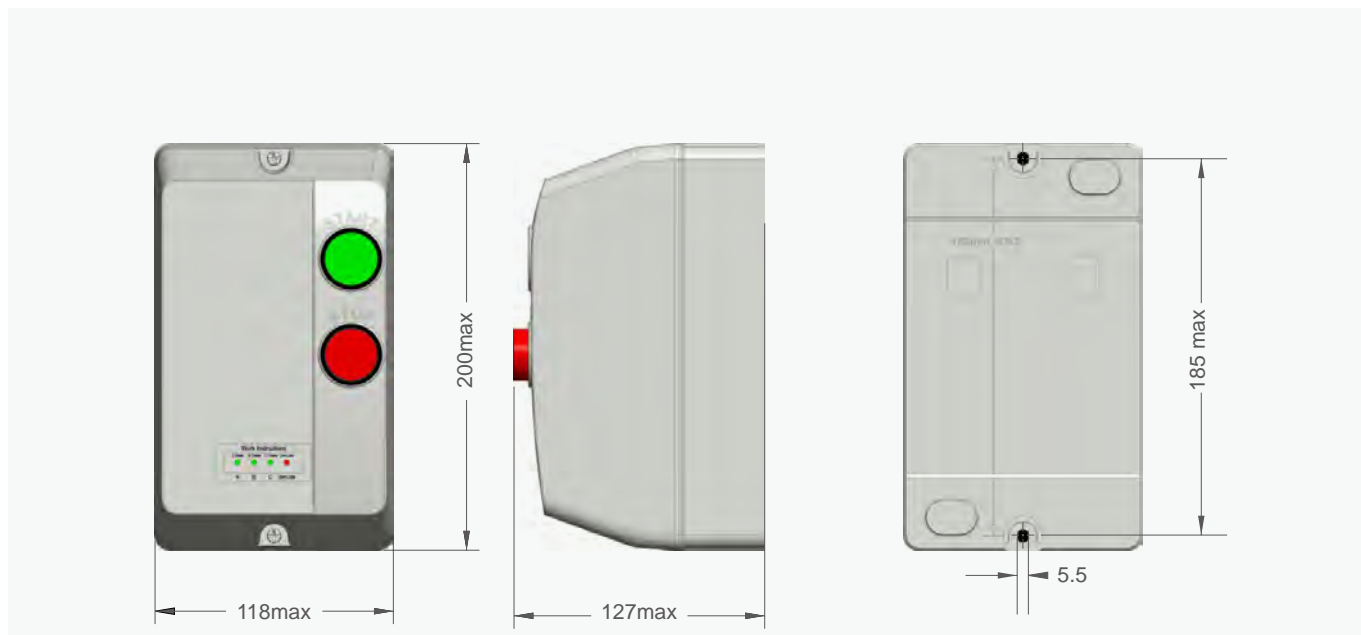

Motor Control & Protection

LE1 Magnetic Starter



General

LE1 Magnetic starter is suitable for those circuits whose rated voltage is up to 690V AC 50Hz or 60Hz. With AC-3 type, LE1 is used for starting or halting of three-phase squirrel case electromotor whose rated working voltage is 380V and rated working current is from 9A to 95A. Combining with matchable thermal relay can protect the motor from overload and phase failure.

Operating conditions

1. Ambient air temperature: $-5^{\circ}\text{C}\sim+40^{\circ}\text{C}$ average temperature of 24 hours must be below $+35^{\circ}\text{C}$
2. Altitude: $\leq 2000\text{m}$
3. Relative humidity: The maximum temperature is 40 degrees, and the relative humidity of the air should not exceed 50%. Higher relative humidity can be allowed at lower temperatures. The average minimum temperature in the wettest month must be below 25°C and the maximum relative humidity of the month should not exceed 90%. If the humidity changes because of occasional gel generation, it should be eliminated.
4. Pollution level: 3
5. Installation category: III
6. Installation position: The installation degree of the tilt and vertical plane should not exceed $\pm 5^{\circ}$.
7. Shock vibration: Products should be installed and used without severe shake, shock and vibration of the place.


Technical data

Type	Maximum power AC3 duty (kW)			Rated current (A)	Matched thermal relay (A)	Setting current range (A)
	220V 230V	380V 400V	660V 690V			
LE1-09	2.2	4	5.5	9	JR28-25 JR28s-25	2.5~4, 4~6, 5.5~8
LE1-12	3	5.5	7.5	12	JR28-25 JR28s-25	7~10, 9~13
LE1-18	4	7.5	10	18		12~18
LE1-25	5.5	11	15	25		17~25
LE1-32	7.5	15	18.5	32		23~32
LE1-40	11	18.5	30	40	JR28-93 JR28s-93	23~32, 30~40 37~50, 48~65 55~70, 63~80 80~93
LE1-50	15	22	33	50		
LE1-65	18.5	30	37	65		
LE1-80	22	37	45	80		
LE1-95	25	45	45	95		


Motor Control & Protection

LE1 Magnetic Starter


Overall and mounting dimensions(mm)

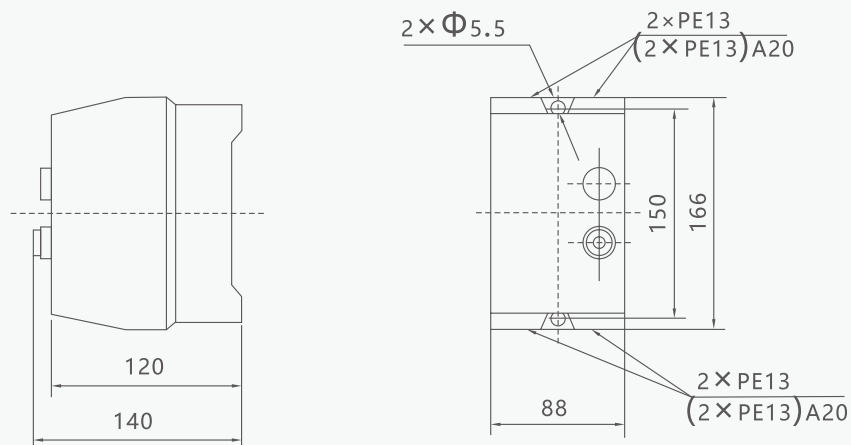

LE1-D09,D12,D18

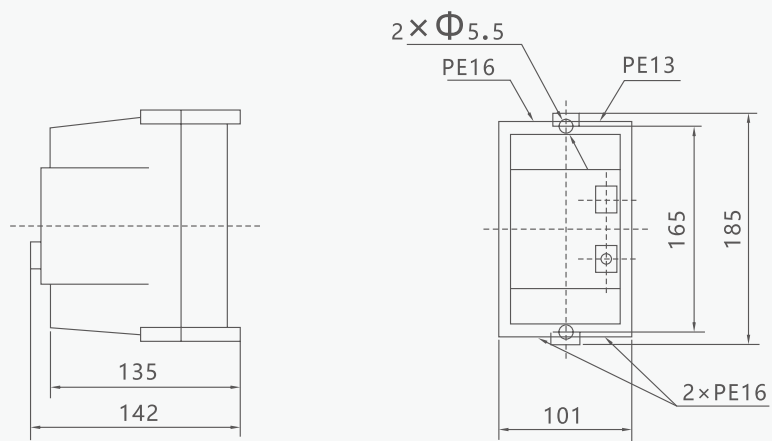

LE1-D25,D32

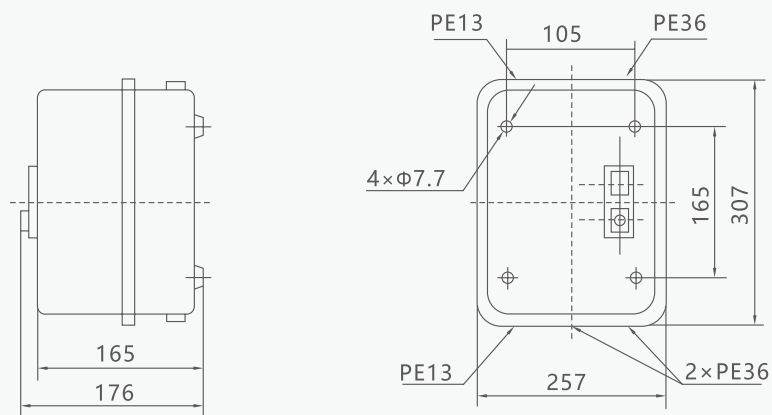

LE1-D40,D50,D65,D80,D95

YCQ5 Series

Motor Starter



Waterproof Box Without Button
YCP5-25N-MC



YCP5



YCP5-25N-MC01

- YCP5-25N With waterproof box: IP55

Motor Control & Protection

YCP5 Motor Starter



General

YCP5 series AC Motor Starter is suitable for circuits whose alternating voltage is up to 690V, current up to 80A. The product works to control the overload, phase loss, short circuit protection and infrequent starts of a three-phase squirrel cage asynchronous motor. The Motor Starter can protect the distributing line for infrequent load transfer, and it can also work as an isolator.

Operating conditions

1. Installation altitude $\leq 2000\text{m}$
2. Ambient air temperature $-5^{\circ}\text{C} \sim +40^{\circ}\text{C}$ average temperature of 24 hours must be below $+35^{\circ}\text{C}$
3. Relative humidity below 90% when the temperature is $+25^{\circ}\text{C} \pm 5^{\circ}\text{C}$
4. Ambient pollution level: 3
5. Installation category of the starter: III

Acting characteristic of each phase in distribution circuit breaker in the load balanced condition

No.	Multiple of setting current	Acting time	Initial state	Ambient air temperature
1	1.0I _n	$\leq 2\text{h}$ non-tripping	Cold state	$+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$
2	1.2I _n	$\leq 2\text{h}$ tripping	Start after 1	$+40^{\circ}\text{C} \pm 2^{\circ}\text{C}$

Technical data

Rated insulation voltage $U_i(\text{V})$: 690;
 Rated work voltage $U_e(\text{V})$: 230/240, 400/415, 440, 550, 690;
 Rated frequency Hz: 50/60;
 The grade rated current of shell $I_n(\text{A})$: 80;
 The rated voltage of disjoints $I_n(\text{A})$;
 The adjusting range of commutating current(A);
 The cutting capacity for rated limit short circuit $I_{cu}(\text{kA})$;
 The cutting capacity for rated work short circuit $I_{cs}(\text{kA})$;
 The bearable voltage for rated shock $U_{imp}(\text{V})$: 600;
 Electrical life AC-3: 2000;
 Mechanical life: 10000.



Motor Control & Protection

YCP5 Motor Starter

Table 1

The adjusting range of commuting current	The cutting capacity for rated limit short circuit I_{cu} , the cutting capacity for rated work short circuit I_{cs}							
	230/240V		415V		500V		660V	
	$I_{cu}(kA)$	$I_{cs}, \%I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cs}, \%I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cs}, \%I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cs}, \%I_{cu}(kA)$
YCP5-25N								
0.1-0.16	100	100	100	100	100	100	—	—
0.16-0.25	100	100	100	100	100	100	—	—
0.25-0.4	100	100	100	100	100	100	—	—
0.4-0.63	100	100	100	100	100	100	—	—
0.63-1	100	100	100	100	100	100	—	—
1-1.6	100	100	100	100	100	100	—	—
1.6-2.5	100	100	100	100	100	100	3	75
2.5-4	100	100	100	100	100	100	3	75
4-6.3	100	100	100	100	50	100	3	75
6-10	100	100	100	100	10	100	3	75
9-14	100	100	15	50	6	75	3	75
13-18	100	100	15	50	6	75	3	75
17-23	50	50	15	50	4	75	3	75
20-25	50	50	15	50	4	75	3	75
24-32	50	50	10	50	4	75	3	75
YCP5-80N								
6-10	/	/	100	50	8	100	4	100
10-16	/	/	100	50	8	100	4	100
14-20	/	/	100	50	8	100	4	100
16-25	/	/	100	50	8	100	4	100
25-40	/	/	35	50	8	75	4	75
40-63	/	/	35	50	8	75	4	75
56-80	/	/	15	50	4	100	2	100

C

Motor Control & Protection

YCP5 Motor Starter

Protection properties


Over-load Protection Properties

Series No.	Multiple of setting current	Initial status	Time	Expected results	Ambient temperature
1	1.05	Cold status	$t \geq 2h$	Non-tripping	$+20^{\circ}C \pm 2^{\circ}C$
2	1.20	Heat status (right after test.1)	$t < 2h$	Tripping	$+20^{\circ}C \pm 2^{\circ}C$
3	1.50	Heat status (right after test.1)	Tripping class 10A $t < 2min$ 10 $t < 4min$	Tripping	$+20^{\circ}C \pm 2^{\circ}C$
4	7.20	Cold status	Tripping class 10A $2s < t \leq 10s$ 10 $4s < t \leq 10s$	Tripping	$+20^{\circ}C \pm 2^{\circ}C$



Phase failure protection properties

Series No.	Multiple of setting current		Initial status	Time	Expected results	Ambient temperature
	Any 2 phase	The other phase				
1	1.0	0.9	Cold status	$t \geq 2h$	Non-tripping	$+20^{\circ}C \pm 2^{\circ}C$
2	1.15	0	Heat status (right after test.1)	$t < 2h$	Tripping	$+20^{\circ}C \pm 2^{\circ}C$


Overall and mounting dimensions(mm)

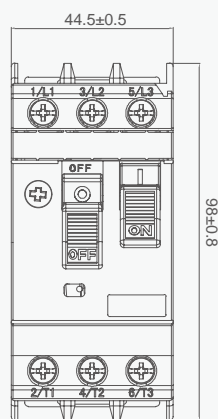

YCP5-25N

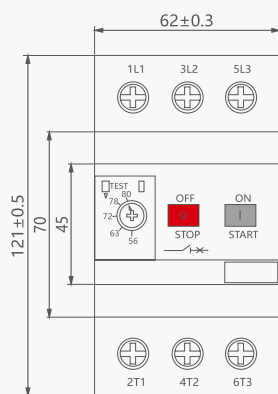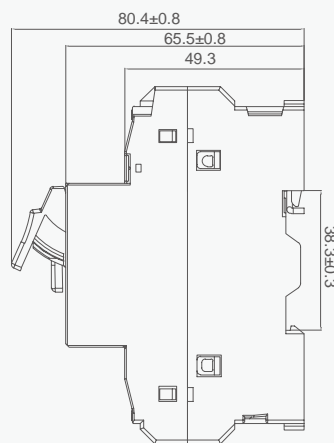

YCP5-80N

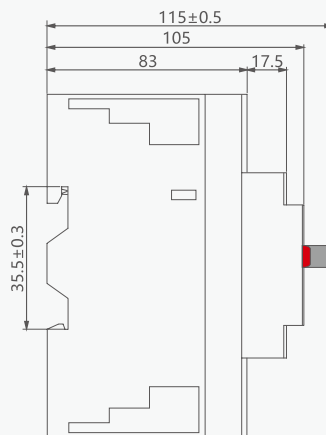

Motor Control & Protection

YCP5 Motor Starter

Table 2

Type	Standard power ratings of 3-phase molors 50/60Hz in category AC-3						Current setting range
	220V kW	380V kW	415V kW	440V kW	500V kW	660V kW	
YCP5-25N-ME01	-	-	-	-	-	-	0.1-0.16
YCP5-25N-ME02	-	-	-	-	-	-	0.16-0.25
YCP5-25N-ME03	-	-	-	-	-	-	0.25-0.4
YCP5-25N-ME04	-	-	-	-	-	0.37	0.4-0.63
YCP5-25N-ME05	-	-	-	0.37	0.37	0.55	0.63-1
YCP5-25N-ME06	-	0.37	-	0.55	0.75	1.1	1-1.6
YCP5-25N-ME07	0.37	0.75	0.75	1.1	1.1	1.5	1.6-2.5
YCP5-25N-ME08	0.75	1.5	1.5	1.5	2.2	3	2.5-4
YCP5-25N-ME10	1.1	2.2	2.2	3	3.7	4	4-6.3
YCP5-25N-ME14	2.2	4	4	4	5.5	7.5	6-10
YCP5-25N-ME16	3	5.5	5.5	7.5	7.5	9	9-14
YCP5-25N-ME20	4	7.5	9	9	9	11	13-18
YCP5-25N-ME21	5.5	11	11	11	11	15	17-23
YCP5-25N-ME22	5.5	11	11	11	15	18.5	20-25
YCP5-25N-ME32	7.5	15	15	15	18.5	26	24-32
YCP5-80N-ME10	1.1	2.2	2.2	3	3.7	4	6-10
YCP5-80N-ME16	2.2	4	4	4	5.5	7.5	10-16
YCP5-80N-ME20	4	7.5	7.5	7.5	10	11	14-20
YCP5-80N-ME25	5.5	11	11	11	15	18.5	16-25
YCP5-80N-ME40	11	18.5	22	22	25	33	25-40
YCP5-80N-ME63	15	30	33	33	40	55	40-63
YCP5-80N-ME80	22	40	45	45	55	63	56-80

Motor Control & Protection

YCP5 Motor Starter



YCP5-25N Accessories

Table 3

Names of accessories	Code	Ae11		Installation place
Instantaneous auxiliary contacts	AE11	1NO+NC		The front of breaker (1PCS can be installed)
	AE20	2NO		
	AN11	1NO+1NC		
	AN20	2NO		
Fault signal contact + Instantaneous auxiliary contacts	AD1010	Fault signal contact NO	NO	The left of breaker (2PCS can be installed)
	AD1001		NC	
	AD0110	Fault signal contact NC	NO	
	AD0101		NC	

Table 4

Names of accessories	Code	Ae11	Installation place
Under voltage release	AU115	100-127V 50Hz	The right of breaker (1 PCS can be installed)
	AU225	220-240V 50Hz	
	AU385	380-415V 50Hz	
Shunt release	AS115	100-127V 50Hz	
	AS225	220-240V 50Hz	
	AS385	380-415V 50Hz	



YCP5-80N Accessories

Table 5

Names of accessories	Code	The type of contacts	Installation place
Instantaneous auxiliary contacts	A01	1NO+1NC	The right of breaker (1 PCS can be installed)
	A02	2NO	



General

YCP6 series Motor protection circuit breaker (also known as: Motor Protector or Motor starter, hereinafter referred to as "circuit breaker") is suitable for AC voltage to 690V, the highest current to 32A circuit, is a circuit breaker integrating the functions of isolation switch, circuit breaker and thermal relay with isolation protection, overload protection, temperature compensation, phase failure protection, short circuit protection. Application range: three-phase mouse cage asynchronous motor direct start and control, distribution line protection and infrequent load conversion.

Standard: IEC60947-2, 60947-4-1.

Type designation

Model	Frame current	Operating method	Rated current
YCP6	-	N	0.16
Motor Circuit Breaker	32	N:new	0.16
			0.25
			0.4
			0.63
			1
			1.6
			2.5
			4
			6.3
			10
			14
			18
23			
25			
32			

Operating Conditions

1. The altitude of the installation site is generally not more than 2000m.
2. The lower limit of ambient air temperature is generally not lower than -5°C, and the upper limit is generally not higher than +40°C.
3. The relative humidity of the air is not more than 50% when the temperature is +40°C, and the minimum monthly temperature of the wettest month is 25°C, and the monthly average maximum relative humidity is not more than 90%.
4. The surrounding environment pollution level is 3.
5. Starter installation categories are III.
6. The inclination of the mounion surface and the vertical plane is not more than ±5°.
7. Rated working system: uninterrupted working system, intermittent working system.

Motor Control & Protection

YCP6 Motor Starter

Operating Conditions

1. Rated insulation voltage $U_i(V)$: 690
2. Rated impulse withstand voltage $U_{imp}(kV)$: 8
3. Rated operating voltage $U_e(V)$: 230/240, 400/415, 440, 500, 690
4. Rated frequency(Hz): 50, 60
5. Frame rated current $I_{nm}(A)$: 32A
6. Rated current $I_n(A)$: see Table 1

Hot component setting current adjustment range: rated limit and rated operating short-circuit breaking capacity see Table 1.

Table 1.

Type	Arcing distance (mm)	Rated limit short-circuit breaking capability I_{CU} , rated operation short-circuit breaking capability I_{CS} kA						Current setting range
		230/240V		400/415V		690V		
		$I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cu}(kA)$	$I_{cu}(kA)$	
YCP6-32PN-0.16	40	100	100	100	100	100	100	0.1-0.16
YCP6-32PN-0.25	40	100	100	100	100	100	100	0.16-0.25
YCP6-32PN-0.4	40	100	100	100	100	100	100	0.25-0.4
YCP6-32PN-0.63	40	100	100	100	100	100	100	0.4-0.63
YCP6-32PN-1	40	100	100	100	100	100	100	0.63-1
YCP6-32PN-1.6	40	100	100	100	100	100	100	1-1.6
YCP6-32PN-2.5	40	100	100	100	100	3	2.25	1.6-2.5
YCP6-32PN-4	40	100	100	100	100	3	2.25	2.5-4
YCP6-32PN-6.3	40	100	100	100	100	3	2.25	4-6.3
YCP6-32PN-10	40	100	100	100	100	3	2.25	6-10
YCP6-32PN-14	40	100	100	15	7.5	3	2.25	9-14
YCP6-32PN-18	40	100	100	15	7.5	3	2.25	13-18
YCP6-32PN-23	40	50	25	15	7.5	3	2.25	17-23
YCP6-32PN-25	40	50	25	15	7.5	3	2.25	20-25
YCP6-32PN-32	40	50	25	10	5	3	2.25	24-32

C

Motor Control & Protection

YCP6 Motor Starter

Table 2.

Type	Standard power ratings of 3-phase molors 50/60Hz in category AC-3						Current setting range
	220V	380V	415V	440V	500V	690V	
	kW	kW	kW	kW	kW	kW	
YCP6-32PN-0.16	-	-	-	-	-	-	0.1-0.16
YCP6-32PN-0.25	-	-	-	-	-	-	0.16-0.25
YCP6-32PN-0.4	-	-	-	-	-	-	0.25-0.4
YCP6-32PN-0.63	-	-	-	-	-	0.37	0.4-0.63
YCP6-32PN-1	-	-	-	0.37	0.37	0.55	0.63-1
YCP6-32PN-1.6	-	0.37	-	0.55	0.75	1.1	1-1.6
YCP6-32PN-2.5	0.37	0.75	0.75	1.1	1.1	1.5	1.6-2.5
YCP6-32PN-4	0.75	1.5	1.5	1.5	2.2	3	2.5-4
YCP6-32PN-6.3	1.1	2.2	2.2	3	3.7	4	4-6.3
YCP6-32PN-10	2.2	4	4	4	5.5	7.5	6-10
YCP6-32PN-14	3	5.5	5.5	7.5	7.5	9	9-14
YCP6-32PN-18	4	7.5	9	9	9	11	13-18
YCP6-32PN-23	5.5	11	11	11	11	15	17-23
YCP6-32PN-25	5.5	11	11	11	15	18.5	20-25
YCP6-32PN-32	7.5	15	15	15	18.5	25	24-32

The enclosure protection class is IP20.

Motor Control & Protection

YCP6 Motor Starter

The enclosure protection class is IP20.

The operating performance of the circuit breaker is shown in Table 3.

Table 3.

Type	Frame size rated current I_{nm}	Hourly operation cycles	Operation cycle number	
			Electrical life	Mechanical life
YCP6-32PN	32	120	10000	100000

Overcurrent action protection

See Table 4, Table 5, and Table 6 for the action characteristics of the circuit breaker when each phase is balanced and unbalanced.

Table 4 Operating characteristics of the circuit breaker when the phases are balanced (Distribution protection)

Type	Distribution breaker			Circumstance temperature
	Setting current multiple	Tripping time	Status	
YCP6-32PN	1.05	1h non-tripping	Initial	+20°C±2°C
	1.3	1h tripping	Following serial 1	
	1.5	< 2min tripping		

Table 5 Action characteristics of balanced load of each phase of the circuit breaker (Motor protection)

Type	Distribution breaker			Circumstance temperature
	Setting current multiple	Tripping time	Status	
YCP6-32PN	1.05	2h non-tripping	Initial	+20°C±2°C
	1.2	2h tripping	Following serial 1	
	1.5	Action within 2 minutes		
	7.2	2~10s 2h tripping	Initial	

Table 6 The action characteristics of the circuit breaker when the load is unbalanced (phase break)

Type	Setting current multiple		Status	Specified time	Expected results	Circumstance temperature
	Any two-phase	Third phase				
YCP6-32PN	1.0	0.9	Cold state	$t \geq 2h$	non-tripping	+20°C±2°C
	1.15	0	Thermal state (In immediate order 1.)	$t \leq 2h$	tripping	

Table 7 The instantaneous electromagnetic buckle action characteristics of short circuit device are shown

Type	Test current	Start status	Specified time	Expected results	Circumstance temperature
YCP6-32PN	$0.8 \times 12 \times I_n$	Cold state	$t \geq 0.2s$	non-tripping	+20°C ± 5°C
	$1.2 \times 12 \times I_n$	Cold state	$t \leq 0.2s$	tripping	+20°C ± 5°C

Motor Control & Protection

YCP6 Motor Starter

Accessories

Attachment Name	YCP6-32PN	Accessory Specifications	
Undervoltage release	YCP6-AU115	110~150V, 50Hz; 127V, 50Hz	
	YCP6-32PN AU225	220~240V, 50Hz	
	YCP6-32PN AU385	380~400V, 50Hz; 400V, 60Hz	
Shunt release	YCP6-32PN AS115	110~150V, 50Hz; 127V, 60Hz	
	YCP6-32PN AS225	220~240V, 50Hz	
	YCP6-32PN AS385	380~400V, 50Hz; 440V, 60Hz	
Instantaneous auxiliary contacts (front hanging)	YCP6-32PN AE20	2NO	
	YCP6-32PN AE11	1NO+1NC	
Instantaneous auxiliary contacts (side hanging)	YCP6-32PN AN20	2NO	
	YCP6-32PN AN11	1NO+1NC	
Fault signal contacts and instantaneous auxiliary contacts	YCP6-32PN AD1010	Fault signal contact NO	NO
	YCP6-32PN AD1001		NC
	YCP6-32PN AD0110	Fault signal contact NC	NO
	YCP6-32PN AD0101		NC



Undervoltage release

Performance of the YCP6-32 AU115, AU225, AU385 of the Undervoltage stripper: Rated insulated voltage U_i (V): 690.

Motion Characteristics:

When the voltage drops to the range of 70% and 35% of the rated voltage, the undervoltage stripper shall act; The Undervoltage stripper shall be able to prevent the starter from closing when the supply voltage is less than 35% of the rated voltage of the stripper, and the undervoltage stripper shall be able to ensure the closure of the starter when the supply voltage is equal to or greater than 85% of the rated voltage



Shunt release

Performance of the YCP6-32 AS115, AS225, AS385 of the shunt release.

Rated insulated voltage U_i (V): 690

Action characteristics:

The operating voltage range of the shunt release stripper is 70%~110% of the rated operating voltage.



Upper auxiliary
AE-11,AE-20

Performance of instantaneous auxiliary contact YCP6-32 AE20, AE11 (front hanging):

Rated insulated voltage U_i (V): 250;

Agreed heating current I_{th} (A): 2.5;

The use category of instantaneous auxiliary contacts, rated operating voltage and rated operating current are shown in the table below.

Motor Control & Protection


YCP6 Motor Starter

Working with categories	AC-15				DC-13		
Rated operating voltage U_e (V)	24	48	110/127	230/240	24	48	60
Rated operating current I_e (A)	2	1.25	1	0.5	1	0.3	0.15
Normal working power P (W)	48	60	127	120	24	15	9

The abnormal connection and breaking ability of fault signal contacts and instantaneous auxiliary contacts are shown in the following table

Working with categories	Connected			Division			Number of cycles and operating frequencies of the pass-through operation		
	I/I_e	U/U_e	$\cos\Phi$ or T0.95	I/I_e	U/U_e	$\cos\Phi$ or T0.95	Number of Operation Loops	Number of operation cycles per minute	Electrified time
AC-14	24	48	48	6	1.1	0.7	24	48	60
AC-15	2	1.25	1.25	10	1.1	0.3	1	0.3	0.15
DC-13	48	60	60	1.1	1.1	6Pe	24	15	9

YCP6-32P Knob type product extension handle



	Attachment Type	Function
	AP02	off position locked with padlock, IP54

Motor Control & Protection

YCP6 Motor Starter

Overall and mounting dimensions(mm)

C

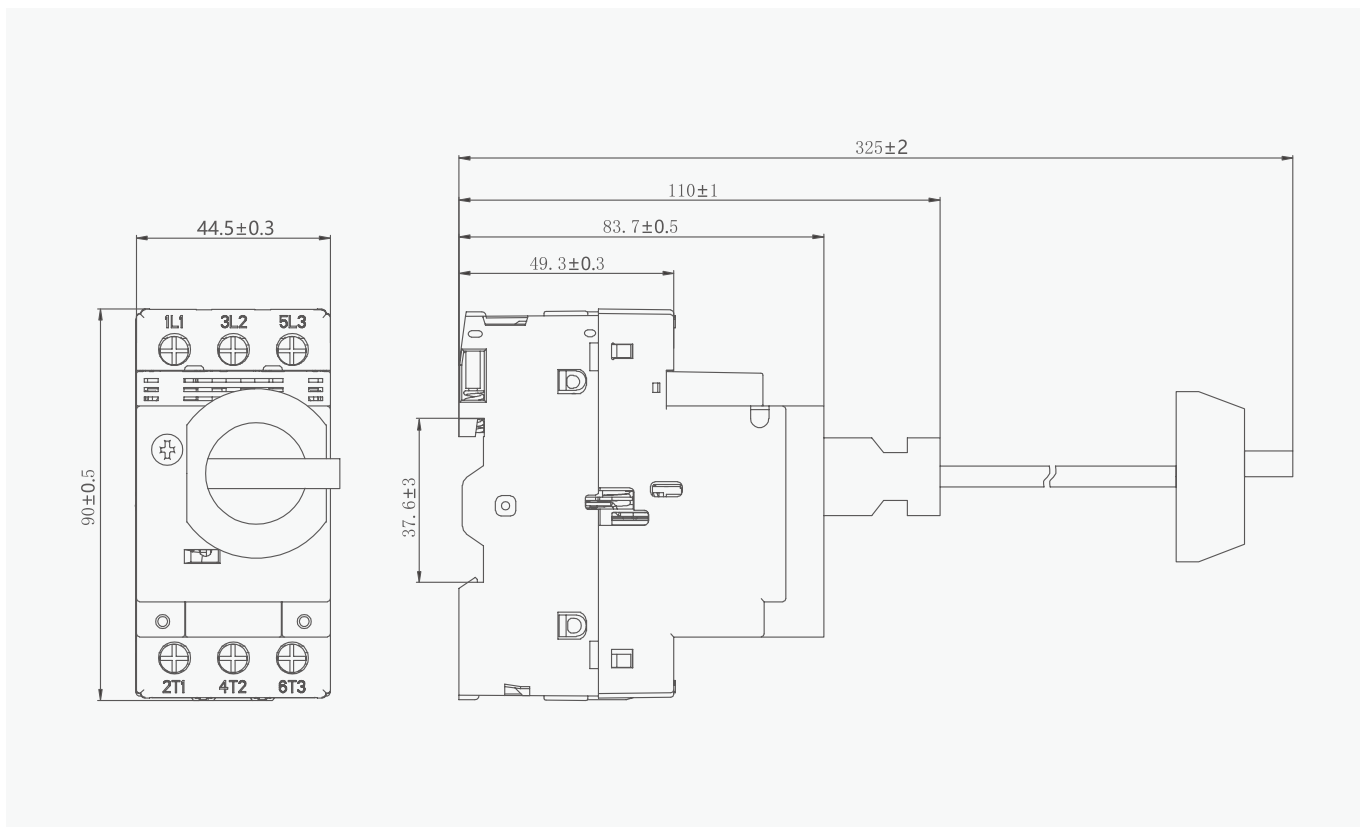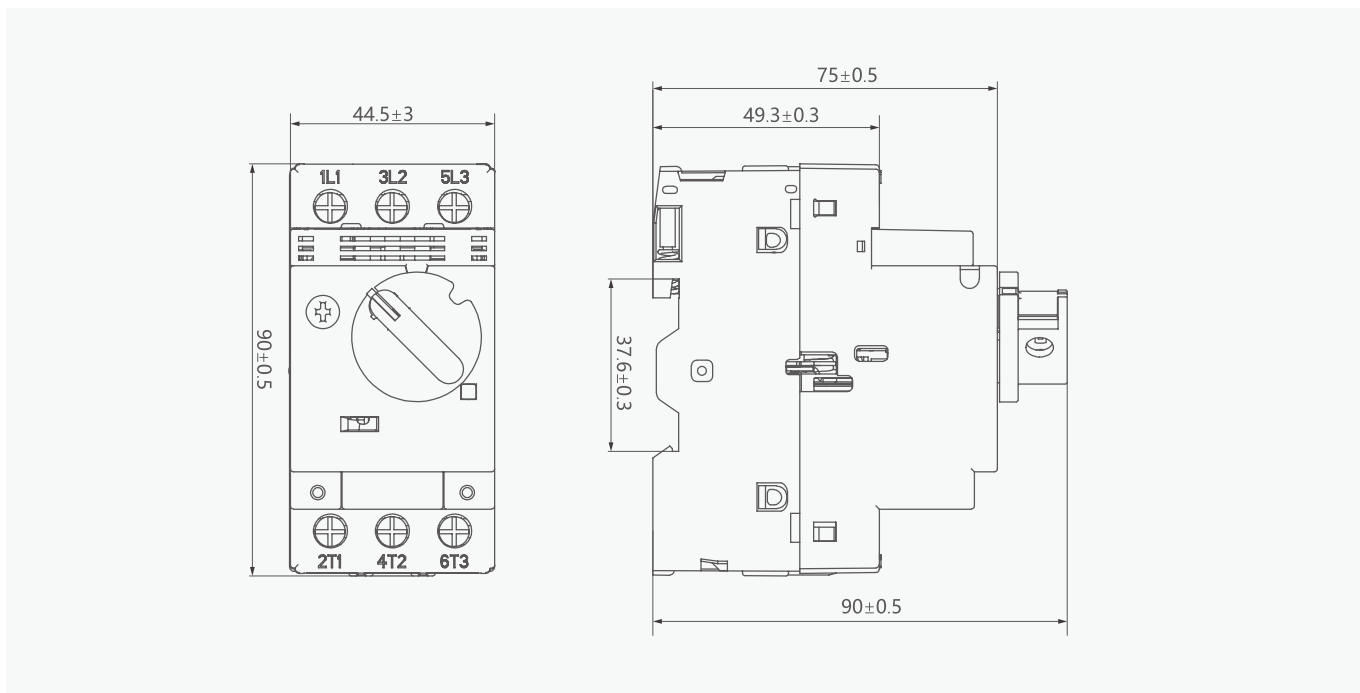

Motor Control & Protection

YCP7 Motor protector



General

The YCP7 series AC motor starter is suitable for circuits with AC voltage up to 690V and current up to 32A. It is used for overload, phase failure, short circuit protection, and infrequent starting control of three-phase squirrel cage asynchronous motors. It can be used for distribution line protection and infrequent load switching, and can also be used as an isolator. Standards: IEC 60947-4-1, IEC 60947-4-2

Type designation

YC P 7 - 32 B 0.1-0.16A

Company code	Protector	Current shell frame	Method of operation	Current	
YC	P7	32	B	0.1-0.16A	
Motor Circuit Breaker	protector	32A	Slide left and right	0.1-0.16	4-6.3
				0.16-0.25	6-10
				0.25-0.4	9-14
				0.4-0.63	13-18
				0.63-1	17-23
				1-1.6	20-25
				1.6-2.5	24-32
				2.5-4	



Operating condition

1. Ambient temperature: -5°C~+40°C
2. Relative humidity: ≤20% at 40°C; ≤90% at 20°C
3. Altitude: ≤2000m
4. The inclination between the starter and the vertical installation surface shall not exceed ± 5
5. Environmental conditions: no harmful gases and vapors, no conductive or explosive dust, no severe mechanical vibration

Motor Control & Protection

YCP7 Motor protector

Technical data

Rated insulation voltage U_i (V)	690
Rated impulse withstand voltage U_{imp} (V)	8000
Rated working voltage U_e (V)	AC230/240, AC400/415, AC440, AC500, AC690
Rated frequency (Hz)	50/60
usage categories	A, AC-3
The shell protection level	IP20 (front side).

C

Product number	Rated current of release I_n (A)	Setting current Adjustment range(A)	Rated ultimate short-circuit breaking capacity I_{cu} , rated operating short-circuit breaking capacity I_{cs} kA				Flying arc distance (mm)
			AC 400/415V		AC 690V		
			I_{cu}	I_{cs}	I_{cu}	I_{cs}	
YCP7-32B	0.16	0.1~0.16	100	100	100	100	40
	0.25	0.16-0.25	100	100	100	100	40
	0.4	0.25-0.4	100	100	100	100	40
	0.63	0.4-0.63	100	100	100	100	40
	1	0.63-1	100	100	100	100	40
	1.6	1-1.6	100	100	100	100	40
	2.5	1.6-2.5	100	100	4	4	40
	4	2.5-4	100	100	4	4	40
	6.3	4-6.3	100	100	4	4	40
	10	6-10	100	100	4	4	40
	14	9-14	25	15	4	4	40
	18	13-18	25	15	4	4	40
	23	17-23	25	15	4	4	40
	25	20-25	25	15	4	4	40
32	24-32	25	15	4	4	40	

Motor Control & Protection

YCP7 Motor protector

Rated power of three-phase motor controlled by starter

Product number	Rated current of release I_n (A)	Setting current Adjustment range(A)	Standard rated power of three-phase motor (kW)					
			AC-3,50Hz/60Hz					
			230/240V	400V	415V	440V	500V	690V
YCP7-32B	0.16	0.1~0.16	-	-	-	-	-	-
	0.25	0.16-0.25	-	-	-	-	-	-
	0.4	0.25-0.4	-	-	-	-	-	-
	0.63	0.4-0.63	-	-	-	-	-	0.37
	1	0.63-1	-	-	-	0.37	0.37	0.55
	1.6	1-1.6	-	0.37	-	0.55	0.75	1.1
	2.5	1.6-2.5	0.37	0.75	0.75	1.1	1.1	1.5
	4	2.5-4	0.75	1.5	1.5	1.5	2.2	3
	6.3	4-6.3	1.1	2.2	2.2	3	3.7	4
	10	6-10	2.2	4	4	4	5.5	7.5
	14	9-14	3.4	5.5	5.5	7.5	7.5	9
	18	13-18	5.5	7.5	9	9	9	11
	23	17-23	5.5	11	11	11	11	15
	25	20-25	15	11	11	11	15	18.5
	32	24-32	7.5	15	15	15	18.5	25

Note: When using a starter in a line with the presence of high-order harmonics (such as frequency converters and other equipment), the specifications of the starter should be selected according to the actual situation, which is 1.3 to 1.9 times the rated current of the motor, For example when the rated current of the motor is 1.1A, for lines without high-order harmonics, the starter specifications should be selected: 1-1.6A; for circuits with high-order harmonics, it is recommended to choose a starter specification of 1.6-2.5A.

C

Motor Control & Protection

YCP7 Motor protector

Overcurrent protection characteristics

Serial Number	Setting current multiple	Initial state	Set time	Expected results	ambient air temperature
1	1.05	cold state	$t \geq 2h$	Non release	$+20^{\circ}C \pm 2^{\circ}C$
2	1.2	Hot state (rising to the specified current immediately after the first test)	$t < 2h$	trip	$+20^{\circ}C \pm 2^{\circ}C$
3	1.5	Starting after thermal balance of 1 times the set current	$t < 2min$	trip	$+20^{\circ}C \pm 2^{\circ}C$
4	7.2	cold state	$2s < t \leq 10s$	trip	$+20^{\circ}C \pm 2^{\circ}C$

Note: The operating characteristics of the starter during load balancing of each phase

Serial Number	Setting current multiple		Initial state	Set time	Expected results	ambient air temperature
	Any two phases	The third phase				
1	1	0.9	cold state	$t \geq 2h$	Non release	$+20^{\circ}C \pm 2^{\circ}C$
2	1.15	0	Hot state (rising to the specified current immediately after the first test)	$t < 2h$	trip	$+20^{\circ}C \pm 2^{\circ}C$


Note: Action characteristics of the starter when the load of each phase is unbalanced (phase failure)

Serial Number	Setting current multiple	Initial state	Set time	Expected results	ambient air temperature
1	1	cold state	$t \geq 2h$	Non release	$+40^{\circ}C \pm 2^{\circ}C$
2	1.2	Hot state (rising to the specified current immediately after the first test)	$t < 2h$	trip	$+40^{\circ}C \pm 2^{\circ}C$
3	1.5	Hot state (after reaching equilibrium at 1.0 times the set current)	$t < 2min$	trip	$+40^{\circ}C \pm 2^{\circ}C$
4	1.05	cold state	$t \geq 2h$	Non release	$-5^{\circ}C \pm 2^{\circ}C$
5	1.3	Hot state (rising to the specified current immediately after the third test)	$t < 2h$	trip	$-5^{\circ}C \pm 2^{\circ}C$
6	1.5	Hot state (after reaching equilibrium at 1.0 times the set current)	$t < 4min$	trip	$-5^{\circ}C \pm 2^{\circ}C$

Motor Control & Protection

YCP7 Motor protector

Overall and mounting dimensions(mm)

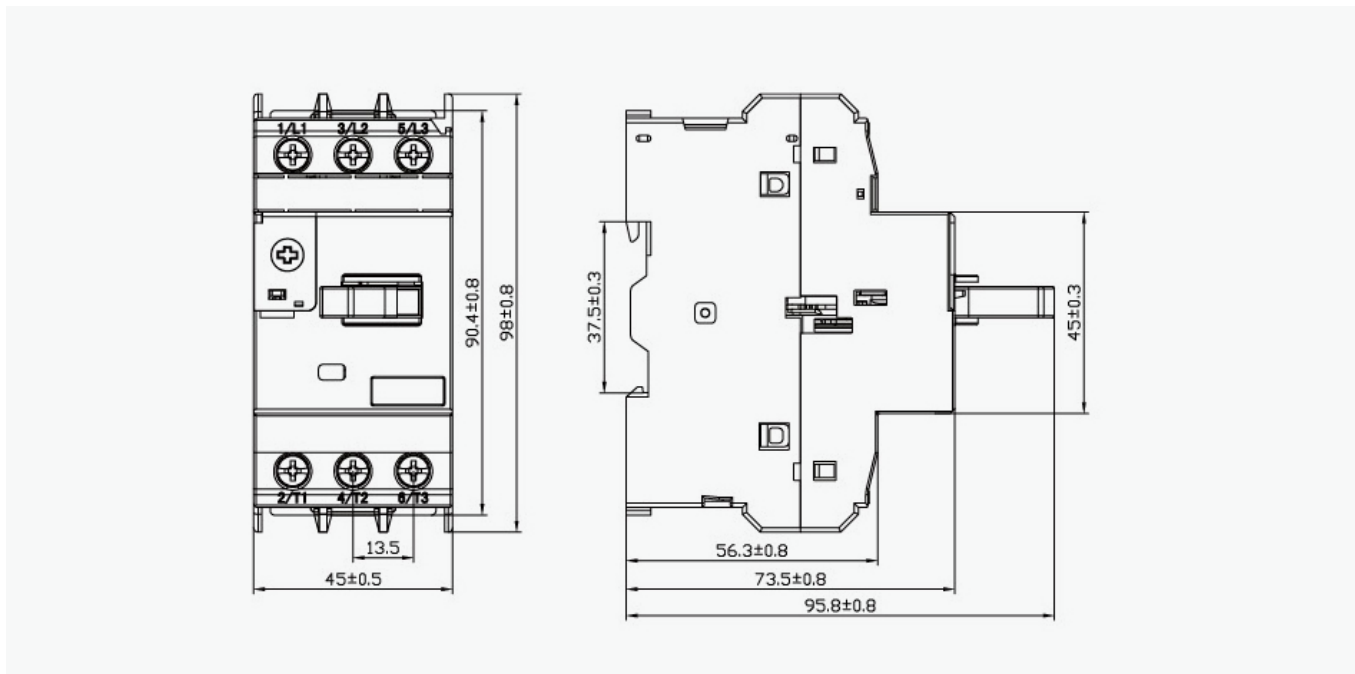

The drawing shows the terminal layout of the YCP7 Motor protector. The main terminals are labeled 1/L1, 3/L2, 5/L3, 2/T1, 4/T2, and 6/T3. The width between the first and second main terminal is 9.3 mm, and between the second and third is 9.3 mm. The total width between the first and third main terminal is 81.1 mm. The distance from the right edge of the main terminal block to the right edge of the shunt release terminal is 18 mm. The shunt release terminal is labeled SH UV. The auxiliary contact terminals are labeled AU20, AU11, FA, AE20, and AE11.

Accessory name	YCP7-32B
Undervoltage release	YCP7-UV110
	YCP7-UV220
	YCP7-UV380
Shunt release	YCP7-SH110
	YCP7-SH220
	YCP7-SH380
Instantaneous auxiliary contact(front hanging)	YCP7-AE20
	YCP7-AE11
Instantaneous auxiliary contact(side mounted)Fault signal contact and instantaneous auxiliary contact	YCP7-AU20
	YCP7-AU11
	YCP7-AD0110
	YCP7-AD1010
	YCP7-AD0101

Motor Control & Protection

YCP7 Motor protector



YCP7-UV

Technical data

Rated insulation voltage U_i (V)	690
Rated impulse withstand voltage U_{imp} (kV):	6
Action characteristics:	When the voltage drops to within the range of 70% and 35% of the rated voltage, the undervoltage release should act. Undervoltage release in power supply. When the voltage is lower than 35% of the rated voltage of the release, the undervoltage release should be able to prevent the starter from closing; The power supply voltage is equal to or greater than 85% of the rated voltage of the release, the undervoltage release should ensure that the starter is closed.



YCP7-SH

Rated insulation voltage U_i (V)	690
Rated impulse withstand voltage U_{imp} (kV):	6
Action characteristics:	Action characteristics: The operating voltage range of the shunt release is 70% to 110% of the rated working voltage.



YCP7-AE

Rated insulation voltage U_i (V)	250
Rated impulse withstand voltage U_{imp} (kV)	2.5
Agreed heating current I_{th} (A)	2.5

Usage category	AC-15				DC-13		
Rated working voltage U_e (V)	24	48	110/127	230/240	24	48	60
Rated working current I_E (A)	2	1.25	1	0.5	1	0.3	0.15
Normal working power P (W)	48	60	127	120	24	15	9

Motor Control & Protection

YCP7 Motor protector



YCP7-AU

Rated insulation voltage U_i (V):	690
Rated impulse withstand voltage U_{imp} (kV):	4
Agreed heating current I_{th} (A):	6

Usage category	AC-15							DC-13				
Rated working voltage U_e (V)	48	110/127	230/240	380/415	440	500	690	24	48	60	110	220
Rated working current I_E (A)	6	4.5	3.3	2.2	1.5	1	0.6	6	5	3	1.3	0.5
Normal working power P (W)	300	500	720	850	650	500	400	140	240	180	140	120



YCP7-FA

Rated insulation voltage U_i (V)	690
The agreed heating current I_{th} (A) of the instantaneous auxiliary contact	6
The agreed heating current I_{th} (A) of the fault signal contact	2.5
Rated impulse withstand voltage U_{imp} (kV) of fault signal contact	2.5
Rated impulse withstand voltage U_{imp} (kV) of instantaneous auxiliary contacts	4

Usage category	AC-14				DC-13		
Rated working voltage U_e (V)	24	48	110/127	230/240	24	48	60
Rated working current I_E (A)	2	1	0.5	0.3	1	0.3	0.15
Normal working power P (W)	48	48	72	72	24	15	9
Operational performance (times)	1000	1000	1000	1000	1000	1000	1000

Usage category	Connect			Disconnection			Number of switching operation cycles and operation frequency		
	I/I_e	u/u_e	$\cos\phi$ or T0.95	I/I_e	u/u_e	$\cos\phi$ or T0.95	Number of operation cycles	Number of operation cycles per minute	Power on time
AC-14	6	1.1	0.7	6	1.1	0.7	10	2	0.05
AC-15	10	1.1	0.3	10	1.1	0.3	10	2	0.05
DC-13	1.1	1.1	6Pe	1.1	1.1	6Pe	10	2	0.05

Ordering Notice

When placing an order, specify the product model, specifications, and quantity.

For example, ordering 50 AC motor starters with a current regulation range of 9-14A for YCP7-32B is written as: YCP7-32B/9-14A 50 units

For example, ordering 10 units of 110V 50Hz undervoltage release is written as YCP7-UV110 10 units

For example, ordering 10 instantaneous auxiliary contact groups with a heating current of 6A, including one normally open contact and one normally closed contact, is written as YCP7-AU11, 10 units

YCB1000 Variable Frequency Drive



General

1. Sensorless vector control with the best low frequency compensation ability
2. Designed with special radiator tree and switch power, all of such kinds of new technologies improve the performance
3. Several protective technologies and new component have been applied to the circuit, notably improve the anti-interference ability
4. Realize the preset frequency, or central frequency adjustable swing frequency function
5. Several phases speed operation controlled by build-in PLC or controlling terminal
6. Modulation mode: space vector pulse width modulation SVPWN
7. Automatic energy saving operation: automatically optimize V/F curve to save the energy
8. Switch input channel: forward and reversal rotation control, 8 channel program switch input, 35 kinds of function
9. Strong overload performance: 150% rated current for 1 minute, 180% rated current for 3 seconds
10. Communication function: RS485 standard communication interface, support ASCII and RTU format MODBUS communication protocol

Type designation

Company code	Frequency inverter	Voltage level	Input voltage	Adaptive motor	Frequency inverter type number
YC	B1000	4	T	0015	G
CNC	/	2: 220V 4: 380V	S: Single phase T: Triple phase	0007: 0.75kW 0015: 1.5kW 0075: 7.5kW	G: Constant Torque P: Fan & Pump type

Motor Control & Protection


YCB1000 Variable Frequency Drive



Application

1. Applied with boiler drum, induced draft fan, coal mine ventilator, etc.
2. Applied in central air-condition energy saving optimization, air compressor energy saving renovation, music fountain, etc.
3. Applied with water circulating pump, water supply pump, clear water pump, sewage pump, purification pump, constant pressure water supply, oilfield water injection pump, oil pump, etc.
4. Applied with mine conveyer, coal feeder, mixer, pulverizer, converter, blast furnace, etc.
5. Applied with extruder, bottle blowing machine, film blowing machine, film conveying belt, centrifugal separator, compressor, sprayer, etc.

Wiring diagram

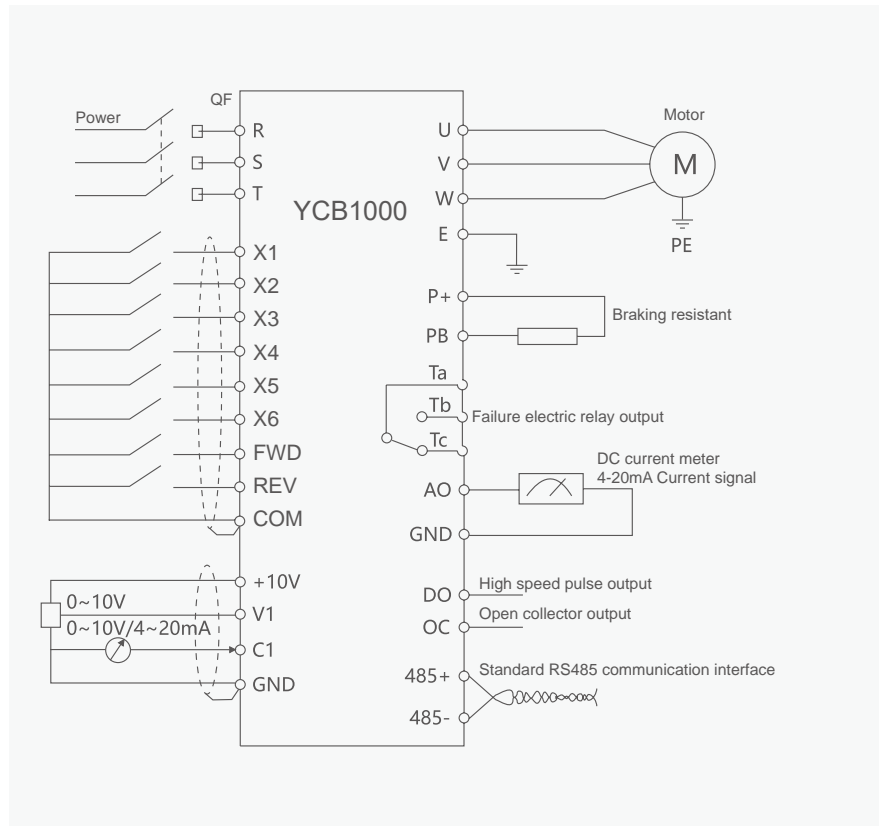

Motor Control & Protection

YCB1000 Variable Frequency Drive

Technical data

Item		Item Description
Input	Rated voltage, frequency	60
	Permissible working voltage	0.15
Output	Rated voltage	Three phases 0~input voltage
	Frequency	0~400Hz
Overloading capacity		G type: 110% long term, 150% 1min, 180% 1s, 200% instantaneous trip P type: 120% 1min, 150% 1s, 180% instantaneous trip
Control Function	Working mode	Electromagnetic vector PWM modulation
	Adjustment range	1:100
	Starting torque	100% rated torque at 3Hz
	Frequency accuracy	Digital setting: highest frequency $\times\pm 0.01\%$ Analog setting: highest frequency $\times\pm 0.2\%$
	Frequency resolution	Digital setting: 0.01Hz; Analog setting: highest frequency $\times 0.1\%$
	Torque	Automatically increase the torque according to the output current. Manually rise torque up, scope:1~30%
	V/F curve	1. Linear curve 2. Square curve
	Acceleration, slow-down time	0.1~600s/min continuous adjustment.
	Compensation for rotation error	Setting scope: 0~20%, it can auto adjust the output frequency of inverter according to the motor loading, to reduce speed changes caused by motor load fluctuations.
	Built-in PID	Easily form the loop control system, which is suitable for pressure control, flux control and etc.
	Auto voltage regulation	When network voltage change, it can auto adjust the output of PWM and keep output voltage constant
	Auto energy-saving run	As load change, it auto optimize the V/F curve, to realize the energy-saved running.
Running Function	Frequency setting	The setting of Potentiometer in the panel: operation panel / key setting, terminal of outer control Rise / Drop setting, analog voltage signal or outer potentiometer setting, analog current signal setting, analog combination setting, setting of 485 serial communication.
	Running command	Control of operation panel, control of outer terminals, control of serial communication
	Analog output terminal	0~10V DC voltage signal output, can realize the output of frequency, current and etc, physical parameters
	Input signal	Positive/negative rotation signal, multi-step signal, fault signal, reset signal
	Output signal	Programmable integrated circuit opening output, fault signal output
Braking Function	Braking by power consumption	External braking resistor, maximum braking torque 100%
	Brake by direct current	When starting or stopping, it is optional respectively, action frequency: 0-20Hz, action voltage level: 0-20%, action time 0-30s, continuously adjustable
Other Functions		Jumping frequency, point function, counter, rotation speed track, restart after instantaneous power off, upper and lower frequency limit, acceleration and slow-down modes adjustable, cymometer and voltmeter output, multi-step / program running, two lines / three lines control, double polar control, selection of multifunctional input terminal, auto reset after fault, 485 serial communication
Protection Function		Input protection against phase failure, over-current protection, overloading protection, under-voltage protection, overheating protection, output short circuit protection and etc.
LED Display		It can display real-time working status, monitoring parameters, function data, fault codes and etc of the inverter
Optional Accessories		Braking parts, remote and operation panel and connection wire, communication panel


Motor Control & Protection

YCB1000 Variable Frequency Drive

Item		Item Description
Ambient Conditions	Working site	Indoor, without direct sunshine, no dust, corrosive gas, flammable and explosive gas, oil fog, steam, water drop, salty
	Altitude	Altitude less than 1000m
	Ambient temperature	-10~+45°C (The only machine: -10~+50°C)
	Humidity	20~90%RH, Without water condensation
	Vibration	<0.5G
	Storage temperature	-20~+60°C
	Protection grade	IP20
Structure	Cooling mode	Fan cooling
	Mounting mode	Wall hung type, standing type

C

Overall and mounting dimensions(mm)

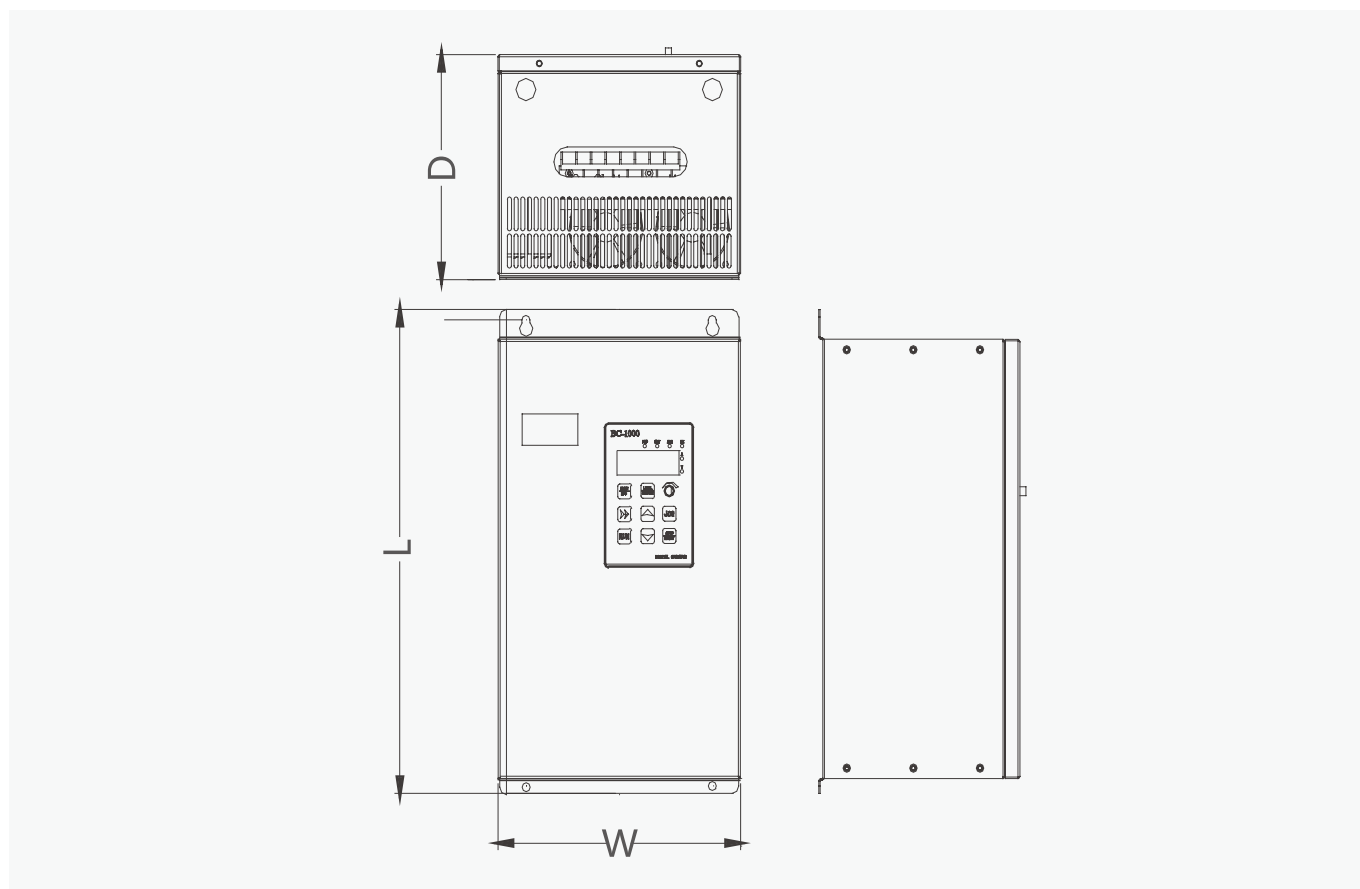

Motor Control & Protection

YCB1000 Variable Frequency Drive

Overall and mounting dimensions(mm)

YCB1000/380V three phase				Appearance Size (mm) LxWxD	Aperture Size of Panel (mm) LxH
No.	Model	Power	Voltage		
1	YCB1000	0.75kW	380V	169x125x170	Panel: 75x55 Panel Cover: 95x61
2		1.5kW			
3		2.2kW			
4		4kW			
5		5.5kW		245x150x188	Panel: 93x70 Panel Cover: 131x91
6		7.5kW			
7		11kW		320x220x210	Panel: 131x70 Panel Cover: 156x80
8		15kW			
9		18.5kW			
10		22kW		395x260x215	
11		30kW			
12		37kW		520x290x290	
13		45kW			
14		55kW		570x290x280	
15		75kW			
16		93kW		600x325x310	
17		110kW			
18		132kW		630x380x380	
19		160kW			
20		185kW		880x510x400	
21		200kW			
22		220kW		980x510x400	
23		260kW			
24		280kW			
25		315kW		1050x710x420	
26		350kW			
27		400kW		1200x860x400	
28		500kW			

YCB1000/220V single phase				Appearance Size (mm) LxWxD	Aperture Size of Panel (mm) LxH
No.	Model	Power	Voltage		
1	YCB1000	0.75kW	220V	142x85x122	Panel: 140x73 Panel Cover: 175x87
2		1.5kW			
3		2.2kW			

YCB3000 Variable frequency drive



General

1. YCB3000 series frequency converter is a general-purpose high-performance current vector frequency converter, which is mainly used to control and adjust the speed and torque of three-phase AC asynchronous motors. It adopts highperformance vector control technology, low-speed and high-torque output, and has the advantages of good dynamic characteristics, super overload capacity, stable performance, powerful protection function, simple human-machine interface, and easy operation.
2. It can be used for driving of weaving, papermaking, wire drawing, machine tool, packaging, food, fan, water pump and various automatic production equipment.

Type designation

Name	Power input voltage	Input phase line	Rated power of frequency converter	Load type
YCB3000	4	T	0015	G
YCB3000	2:AC220V 4:AC380V	S:Single phase T:Three phase	0007: 0.75KW 0015: 1.5KW 0022: 2.2KW	G: Constant torque load P: Fan and water pump loads

Note: The frequency converter YCB3000-2S and 2T are both G-type load types, The maximum power of the frequency converter YCB3000-2S reaches 5.5KW;YCB3000-2T maximum power to 7.5KW.

Operating conditions

Environment	
Where to use	Indoor, free from direct sunlight, no dust, corrosive gas, combustible gas, oil mist, water steam, dripping water or salt, etc
Above sea level	Below 1000m, 1% for 100m over 1000m, 1% over 3000m (Note: The highest elevation of 0.4~3kW drive is 2000m, if used above 2000m, please contact the manufacturer)
Ambient temperature	-10°C~+40°C, when the temperature exceeds 40°C. The decrease is 1.5% per 1C increase, and the maximum ambient temperature is 50°C
Humidity	Less than 95%RH, no condensation
Vibrate	Less than 5.9m/s ² (0.6g)
Storage temperature	-20°C~+60°C



Motor Control & Protection

YCB3000 Variable frequency drive

Technical

Project	Technical specifications	
Input the frequency resolution	Number setting: 0.01Hz, simulation setting: maximum frequency 0.025%	
Control method	Open-loop vector control(SVC); closed-loop vector control(FVC); V/F control.	
Pull-in torque	0.25Hz/150%(SVC); 0Hz/180%(FVC)	
Speed range	1:200 (SVC)	1:1000 (FVC)
Steady speed accuracy	+0.5% (SVC)	+0.02% (FVC)
Torque control accuracy	FVC: +3%, SVC: 5Hz above +5%	
Recurrent ascension	Automatic torque increase, manual torque increase of 0.1%-30.0%.	
V/F curve	Four ways: straight line, multi-point type; complete V y F separation; incomplete V y F separation.	
Add deceleration curve	Straight-line or S-curve acceleration and deceleration mode Four acceleration and deceleration times, acceleration and deceleration time range 0.0-6500.0s	
DC injection braking	DC brake starting frequency:0.00Hz- maximum frequency; Brake time: 0.0s~36.0s; Brake action current value: 0.0%-100.0%	
Electronic contro	Tap movement frequency range: 0.00Hz-50.00Hz; Tap action, acceleration and deceleration time is 0.0s-6500.0s	
Isimple PLC, multi-segment peedoperation	Up to 16 segments can be run with a built-in PLC or control terminal.	
Built-in PID	It can easily realize the process control closed-loop control system.	
Automatic Voltage Adjustment(AVR)	When the grid voltage changes, the output voltage constant.	
Over pressure overloss speed control	Automatic limit of current and voltage during operation to prevent frequent excessive flow pressure trip.	
Quick flow	Minimize the over current fault, and protect the normal	
Restriction function	operation of the frequency converter.	
Torque limit and control	The characteristic of "excavator" automatically limits the torque during operation to prevent frequent current trip; the vector control mode can realize torque control.	
Instantly stop	In case of instantaneous power outage, the frequency converter is maintained to reduce the load feedback energy compensation voltage in a short time.	
Fast flow limit	Avoid the frequent over current fault of the frequency converter.	
Invented IO	Five sets of virtual DIDO, which can achieve simple logic control.	
Timing control	Timing control function: set the time range of 0.0Min ~ 6500.0Mir	
Multi-motorswitching	Two sets of motor parameters, can realize two motor switch control.	
Multi threaded bussupport	Support for six fieldbuses: Modbus, Profibus-DP CANlink CANopen, Profinet, and EtherCAT.	
Motor overheating protection	With the IO extension card 1 option, the analog input AI3 accept the motor temperature sensor input (PT100, Pt1000).	
Multi-encodersupport	Support for differential, open-circuit collector, UVW, rotary transformer, etc	

C


Motor Control & Protection

YCB3000 Variable frequency drive

Project	Technical specifications
Run instructions	Operation panel given, control terminal given, serial communication port given. It can be switched in many ways
Frequency instruction	10 frequency commands: digital given, analog voltage, analog current, pulse, serial port given. You can be switched in many ways
Auxiliary frequency instruction	10 Auxiliary frequency commands. It can flexibly realize the auxiliary frequency fine-tuning and frequency synthesis
Input terminal	<p>standard:</p> <ul style="list-style-type: none"> • Five DI terminals, one of which supports a high-speed pulse input of up to 100kHz • Two AI terminals, 1, one only supports 0-10V voltage input, one supports 0-10V voltage input or 0-20mA current input <p>Extended ability:</p> <ul style="list-style-type: none"> • The 5 DI terminals of the • One AI terminal, support 10V-10V, voltage input, and support PT100/PT1000 support
Leading-out terminal	<p>standard:</p> <ul style="list-style-type: none"> • One high-speed pulse output terminal (optional as the open-circuit collector type), • Support the square-wave signal output of 0~100kHz • 1 DO terminal • One relay output terminal • One AO terminal with 0 to 20 mA current output or 0 to 10V voltage output <p>Extended ability:</p> <ul style="list-style-type: none"> • 1 DO terminal • One relay output terminal • One AD terminal with 0 to 20 mA current output or 0 to 10V voltage output
LED show	Display parameters
Parameter copy	Quick replication of the parameters is available through the LCD action panel option
Key-lock and function selection	Part or all of the keys can be locked to define the scope of some keys to prevent misoperation
Lack of phase protection	Input phase protection, output phase phase protection
Instant over current protection	Stop at over 250% of the rated output current
Over voltage crowbar	Stop when the main circuit DC current is above 820V
Under voltage protection	Stop when the main circuit DC current is below 350V
Overheat protection	Protection is triggered when the inverter bridge overheated
Overload protection	150% rated current for 60s shutdown (4T4500G: 130% rated current running for 60s shutdown)
Over current protection	Stop protection exceeding 2.5 times rated current
Brake protection	Brake unit overload protection, brake resistance short-circuit protection
Short-circuit protection	Output alternate with short circuit protection, output short circuit to ground protection

Wiring diagram

Three-phase 380V~480V standard wiring diagram

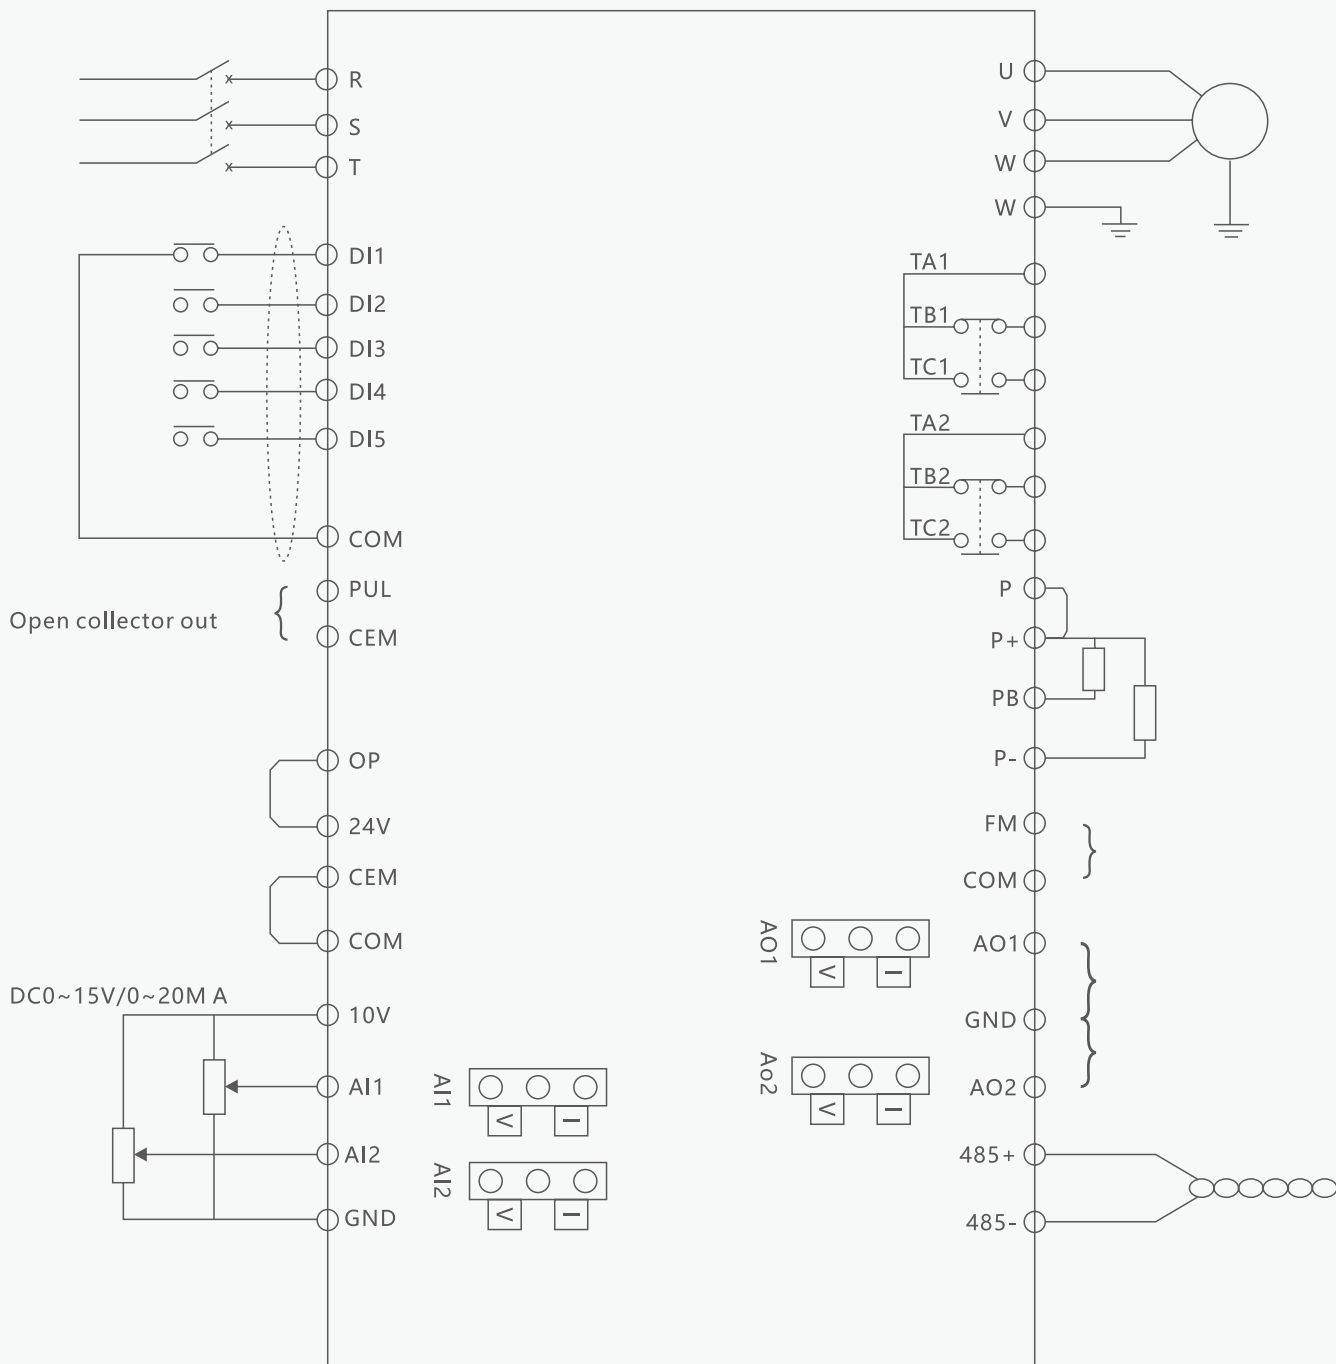


Motor Control & Protection

YCB3000 Variable frequency drive

Product adaptation table

Model	Power supply capacity is KVA	Input current (A)	Output current (A)	Adaptation motor	
				KW	HP
Single-phase power supply: 220V (-10%~+15%), 50/60Hz					
YCB3000-2S0007G	1.5	8.2	4.0	0.75	1
YCB3000-2S0015G	3.0	14	7.0	1.5	2
YCB3000-2S0022G	4.0	23	9.6	2.2	3
YCB3000-2S0040G	8.9	14.6	13	4.0	5
YCB3000-2S0055G	17	26	25	5.5	7.5
Three-phase power supply: 220V (-10%~+15%), 50/60Hz					
YCB3000-2T0007G	3	5	3.8	0.75	1
YCB3000-2T0015G	4	5.8	5.1	1.5	2
YCB3000-2T0022G	5.9	10.5	9	2.2	3
YCB3000-2T0040G	8.9	14.6	13	4.0	5
YCB3000-2T0055G	17	26	25	5.5	7.5
YCB3000-2T0075G	21	35	32	7.5	10
YCB3000-4T0110G	30	46.5	45	11	15
YCB3000-4T0150G	40	62	60	15	20
YCB3000-4T0185G	57	76	75	18.5	25
YCB3000-4T0220G	69	92	91	22	30
YCB3000-4T0300G	85	113	112	30	40
YCB3000-4T0370G	114	157	150	37	50
YCB3000-4T0450G	135	180	176	45	60
YCB3000-4T0550G	161	215	210	55	75
YCB3000-4T0750G	236	315	304	75	100

C

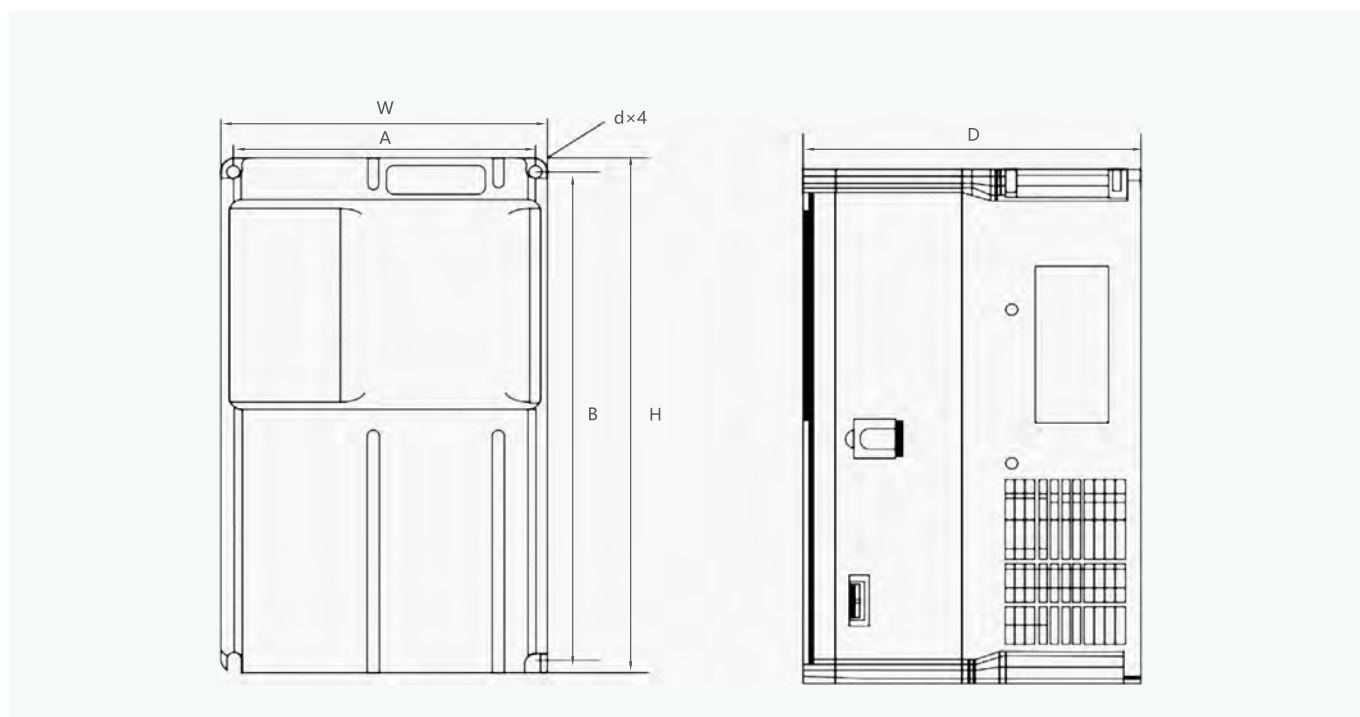

Motor Control & Protection

YCB3000 Variable frequency drive

Product adaptation table

Model	Power supply capacity is KVA	Input current (A)	Output current (A)	Adaptation motor	
				KW	HP
Three-phase power supply: 380V (-10%~+15%), 50/60Hz					
YCB3000-4T0015G	3.0	5	3.8	1.5	2
YCB3000-4T0022G	4.0	5.8	5.1	2.2	3
YCB3000-4T0030G	5.0	8.0	7.2	3.0	4
YCB3000-4T0040G	5.9	10.5	9	4.0	5
YCB3000-4T0055G	8.9	14.6	13	5.5	7.5
YCB3000-4T0075G	11	20.5	17	7.5	10
YCB3000-4T0110G	17	26	25	11	15
YCB3000-4T0150G	21	35	32	15	20
YCB3000-4T0185G	24	38.5	37	18.5	25
YCB3000-4T0220G	30	46.5	45	22	30
YCB3000-4T0300G	54	57	60	30	40
YCB3000-4T0370G	63	69	75	37	50
YCB3000-4T0450G	81	89	91	45	60
YCB3000-4T0550G	97	106	112	55	75
YCB3000-4T0750G	127	139	150	75	100
YCB3000-4T0900G	150	164	176	90	120
YCB3000-4T1100G	179	196	210	110	150
YCB3000-4T1320G	220	240	253	132	180
YCB3000-4T1600G	263	287	304	160	210
YCB3000-4T1850G	305	323	340	185	240
YCB3000-4T2000G	334	365	377	200	260
YCB3000-4T2200G	375	410	426	220	285
YCB3000-4T2500G	404	441	465	250	320

Model	Power supply capacity is KVA	Input current (A)	Output current (A)	Adaptation motor	
				KW	HP
Three-phase power supply: 380V (-10%~+15%), 50/60Hz					
YCB3000-4T2800G	453	495	520	280	370
YCB3000-4T3150G	517	565	585	315	420
YCB3000-4T3550G	565	617	650	355	480
YCB3000-4T4000G	629	687	725	400	530
YCB3000-4T4500G	716	782	820	450	600
YCB3000-4T5000G	800	820	900	500	680
YCB3000-4T5600G	930	950	1020	560	750
YCB3000-4T6300G	1050	1050	1120	630	850
YCB3000-4T7200G	1200	1200	1300	720	960
YCB3000-4T8000G	1330	1380	1420	800	1060
YCB3000-4T10000G	1660	1650	1720	1000	1330

Motor Control & Protection

YCB3000 Variable frequency drive

Overall and mounting dimensions(mm)

Model	Install the holeposition of mm		External size: mm			Install aperture (mm)
	A	B	H	W	D	
YCB3000-4T0015G	79	154	164	89	125	Φ4
YCB3000-4T0022G	79	154	164	89	125	Φ4
YCB3000-4T0030G	79	154	164	89	125	Φ4
YCB3000-4T0040G	86	173	184	97	145	Φ5
YCB3000-4T0055G	86	173	184	97	145	Φ5
YCB3000-4T0075G	131	245	257	146.5	185	Φ6
YCB3000-4T0110G	131	245	257	146.5	185	Φ6
YCB3000-4T0150G	131	245	257	146.5	185	Φ6
YCB3000-4T0185G	151	303	320	170	205	Φ6
YCB3000-4T0220G	151	303	320	170	205	Φ6
YCB3000-4T0300G	120	385	400	200	220	Φ7
YCB3000-4T0370G	120	385	400	200	220	Φ7
YCB3000-4T0450G	200	493	510	260	252	Φ7
YCB3000-4T0550G	200	493	510	260	252	Φ7
YCB3000-4T0750G	200	493	510	260	252	Φ7
YCB3000-4T0900G	200	630	660	320	300	Φ9
YCB3000-4T1100G	200	630	660	320	300	Φ9
YCB3000-4T1320G	250	755	780	400	345	Φ12
YCB3000-4T1600G	250	755	780	400	345	Φ12
YCB3000-4T1850G	250	755	780	400	345	Φ12
YCB3000-4T2000G	300	872	900	460	355	Φ12
YCB3000-4T2200G	300	872	900	460	355	Φ12
YCB3000-4T2500G	360	922	950	500	355	Φ12
YCB3000-4T2800G	360	922	950	500	355	Φ12
YCB3000-4T3150G	500	1029	1050	650	365	Φ12
YCB3000-4T3550G	500	1029	1050	650	365	Φ12
YCB3000-4T4000G	500	1265	1300	650	385	Φ14
YCB3000-4T4500G	500	1265	1300	650	385	Φ14
YCB3000-4T5000G	500	1265	1300	650	385	Φ14
YCB3000-4T5600G	600	1415	1450	850	435	Φ14
YCB3000-4T6300G	600	1415	1450	850	435	Φ14
YCB3000-4T7200G	600	1415	1450	850	435	Φ14
YCB3000-4T8000G	1000	1415	1450	1100	465	Φ14
YCB3000-4T10000G	1000	1415	1450	1100	465	Φ14

C

Motor Control & Protection

YCB600 Series Vector



General

An inverter is an electronic device used to control the speed of a motor. It achieves precise control of motor speed by changing the voltage and frequency that the motor receives.

Variable frequency drives are widely used in industrial applications for precise control of motor speeds, such as in fans, pumps, compressors, etc.


Operating condition

1. Ambient temperature: $-10^{\circ}\text{C}\sim+45^{\circ}\text{C}$
2. Relative humidity: $\leq 20\%$ at 40°C ; $\leq 90\%$ at 20°C
3. Altitude: $\leq 2000\text{m}$
4. Environmental conditions: no harmful gases and vapors, no conductive or explosive dust, no severe mechanical vibration

Type designation

YC B 600 - 2 S 0004G

YC B 600 2 S 0004G

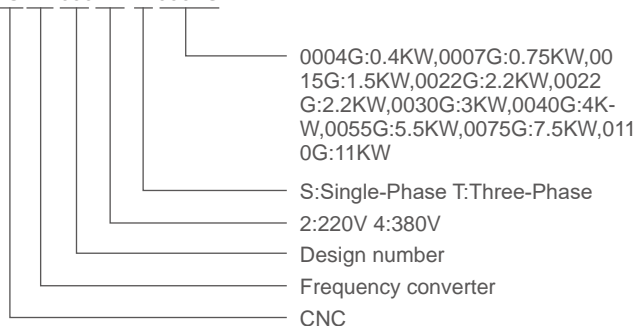

Motor Control & Protection

YCB600 Series Vector

Technical data

Inverter Model (A: Economy Type)	Input Voltage(V)	Rated OutputCurrent (A)	Adaptive motorPower (kw)
YCB600-2S0004G	220-240	2.4	0.4
YCB600-2S0007G	220-240	4.5	0.75
YCB600-2S0015G	220-240	7.0	1.5
YCB600-2S0022G	220-240	10.0	2.2
YCB600-2S0030G	220-240	11.0	3.0
YCB600-4T0007G	360-440	2.1	0.75
YCB600-4T0015G	360-440	3.7	1.5
YCB600-4T0022G	360-440	5.0	2.2
YCB600-4T0030G	360-440	7.0	3.0
YCB600-4T0040G	360-440	9.0	4.0
YCB600-4T0055G	360-440	13.0	5.5
YCB600-4T0075G	360-440	17.0	7.5
YCB600-4T0110G	360-440	25.0	11.0

Technical Indications

Item		Item Description
Input	Rated voltage & Frequency	Single-phase/3 Phase 200-240VAC,3 Phase 360-440VAC,50/60Hz
	Allowable voltage working range	Voltage fluctuation range:±10% Voltage unbalance rate:<3%,Frequency fluctuation:≤5%
Output	Rated voltage Frequency	3 Phase 0-Input voltage VAC 0.0-600Hz
	Overload capacity	110% long-term,150% 1 minute,180% 5seconds
Control your performance	Control mode	V/F control,Simple vector control,Advanced vector control Torque contro
	Frequency resolution	Digital setting:0.1Hz Analog setting:Maximum frequencyx0.1%
	Frequency accuracy	Digital setting:0.1Hz Analog setting:within 0.2%of the maximum output frequency
	V/F Voltage frequency characteristic	Three modes:the first is a linear torque characteristic curve, the second is a square torque characteristiccurve,and the third is a user-set V/F curve.
	Automatic limit current and limit voltage	No matter in the process of acceleration,deceleration or stable operation,it will automatically detect the motor stator current and voltage,and suppress it within the allowable range according to the unique algorithm,minimizing the possibility of system fault tripping.
	Vector voltage-frequency characteristics	Automatically adjust output voltage-frequency ratio according to motor parameters and uniquealgorithm.
	Torque characteristics	Starting torque: 100% rated torque at 5.0Hz(VF control) 150% rated torque at 1.0Hz(vectorcontrol)
Current and suppression	Full current closed-loop control,completely avoid current impact,with perfect overcurrent and overvoltage suppression function	

C

Motor Control & Protection

YCB600 Series Vector

Technical Indications(continued)


Item		Item Description
Control your performance	Under voltage suppression during operation	Especially for users with low grid voltage and frequent grid voltage fluctuations, even if the voltage is lower than the allowable range, the system can maintain the longest possible running time according to the unique algorithm and residual energy allocation strategy
	Slip compensation	Setting range:0~100%,can automatically adjust the output frequency of the inverter according to the motor load, and reduce the rotation speed change of the motor caused by the load change
	Carrier frequency	2.0~20.0KHz
	Automatic voltage regulation operation	Dynamic voltage stabilization, static voltage stabilization, and no voltage stabilization can be selected according to the need to obtain the most stable operation effect.
	Built-in PID	It can easily constitute a closed-loop control system, suitable for process control such as pressure control and flow control
Running	Acceleration and deceleration time	0.1~999.9s Continuous can be set
	Running command	Operation panel control, external terminal control, serial communication control
	Frequency setting	Panel potentiometer setting, panel key setting, external control terminal increase/decrease setting, analog voltage or current signal setting,terminal combination setting, serial communication setting, etc.
	Output signal	One programmable relay output, one analog output
Brake	Energy braking	Energy braking initial start voltage,return voltage andenergy braking rate are continuously adjustable
	DC braking	Start and stop can be selected separately, action frequency 0.0~upper limit frequency, action current level 0~50%, action time 0~30s, continuous can be set
Other functions		Frequency upper and lower limit, reverse running limit, jog function, counter, skip frequency operation, instantaneous power failure restart, fault automatic reset, etc.
Protection function		Overcurrent,overload, overvoltage, undervoltage, overheating,short circuit, etc.
LED Display		Can display the real-time of inverter running status, monitoring parameters,function parameters,fault codes and other information
Optional Parts		Brake components, remote operation panel and connecting cable
Structure	Cooling method	Forced air cooling
	Installation method	Wall-mounted, rail-mounted

Motor Control & Protection

YCB600 Series Vector

Wiring diagram


Basic Wiring Diagram of Inverter

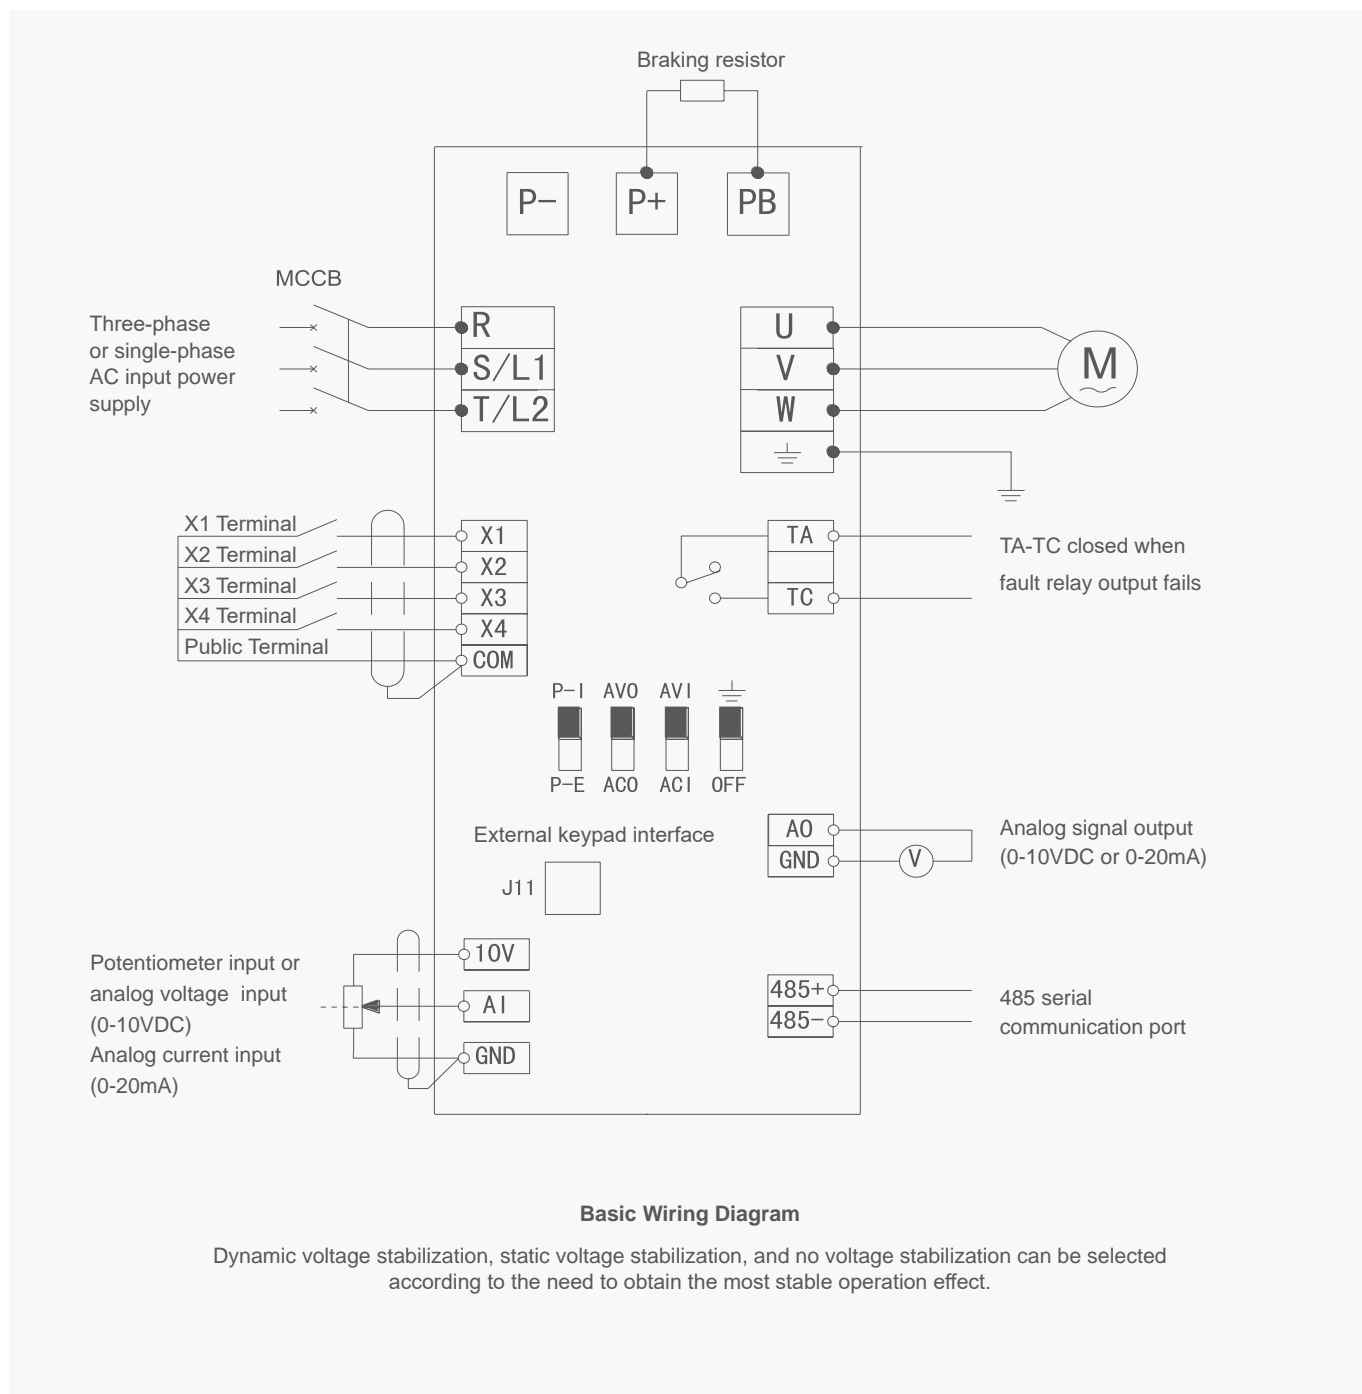

Motor Control & Protection
YCB600 Series Vector


Main terminal

C

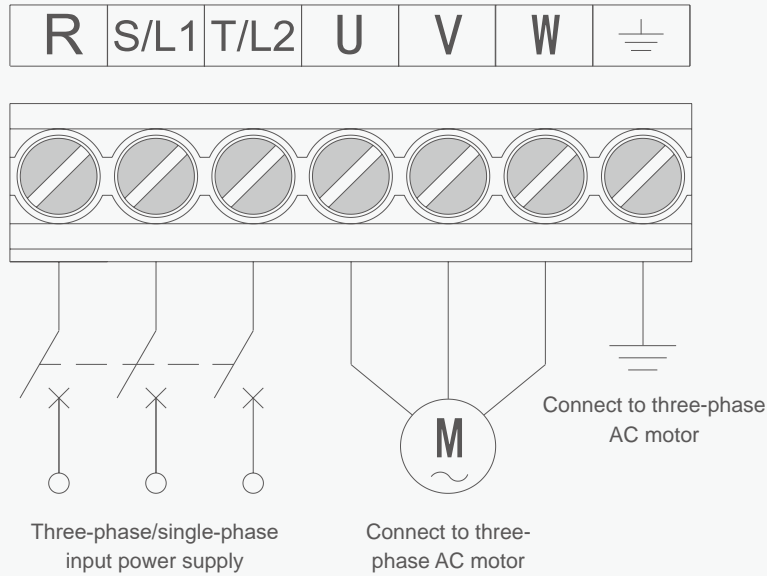

Main circuit terminal diagram 1

Applicable models: YCB600-2S0004G-YCB600-2S0022G
 YCB600-4T0007G-YCB600-4T0030G

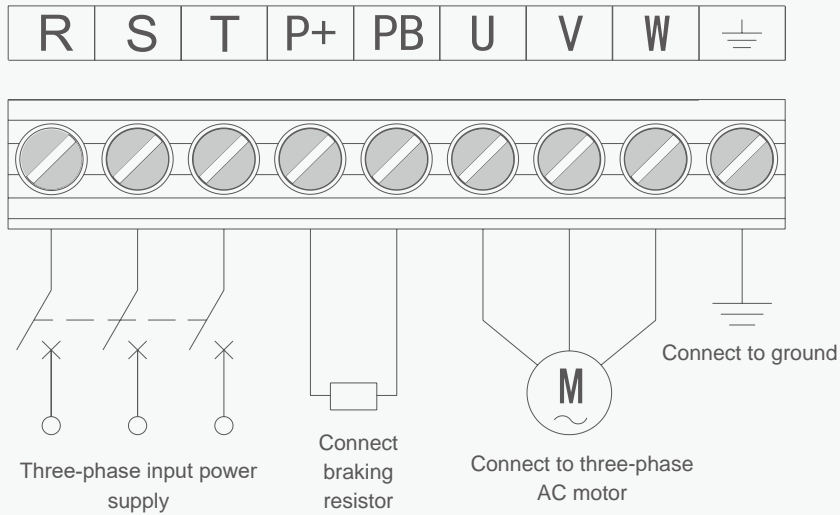

Main circuit terminal diagram 2


Applicable models: YCB600-2S0030G-YCB600-2S0055G
 YCB600-4T0040G-YCB600-4T0110G

Motor Control & Protection

YCB600 Series Vector

Control terminals

Control circuit terminals are shown in

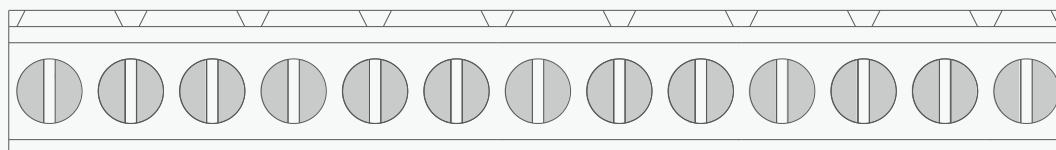

10V	GND	AI	AO	485+	485-	X1	X2	X3	X4	GND	TA	TC
-----	-----	----	----	------	------	----	----	----	----	-----	----	----

Control circuit terminals

Control circuit terminal

Category	Terminal label	Function Description	Electrical Specifications
Analog power terminal	10V	External analog given power supply, and GND, AI terminals connected to potentiometers, frequency setting can be performed	OUTPUT, 10V/10mA DC voltage
Public end	GND	Signal common terminal	
Analog input terminal	AI	Analog voltage signal input, reference ground is GND	INPUT, 0~10V DC voltage
Analog output terminal	AO	Programmable analog voltage output, the function is set by parameter F2.10, the reference ground is GND	OUTPUT, 0~10V DC voltage Or 0~20mA DC current
Communication terminal	485+	Positive end of communication signal	
	485-	Communication signal negative terminal	

Motor Control & Protection

YCB600 Series Vector

Control circuit

Category	Terminal label	Function Description	Electrical Specifications
Multi-function input terminal	X1	It is valid when Xn(n=1,2,3,4)-GND is short-circuited, and its functions are respectively set by parameters F2.13~F2.16	INPUT, 0~5V level signal, Active low, 5mA
	X2		
	X3		
	X4		
Programmable output terminals	TA	Relay contact output, Normal: TA-TC disconnected; When in action: TA-TC is closed; The function is set by parameter F2.20	Contact Rating: NO: 240VAC-3A
	TC		

C

J1

\perp G	Indicates that the main control board is grounded
OFF	Indicates that the ground of the main control board is disconnected

J2

AVO	Indicates analog AO output voltage signal, 0-10V
ACO	Indicates analog AO output current signal, 0-20mA

J4

P-I	Indicates that the built-in keyboard potentiometer is selected
P-E	Indicates the selection of an external keyboard potentiometer


J5

AVI	Indicates analog AI input voltage signal, 0-10V
ACI	Indicates the analog AI input current signal, 0-20mA

Motor Control & Protection

YCB600 Series Vector

Overall and mounting dimensions(mm)

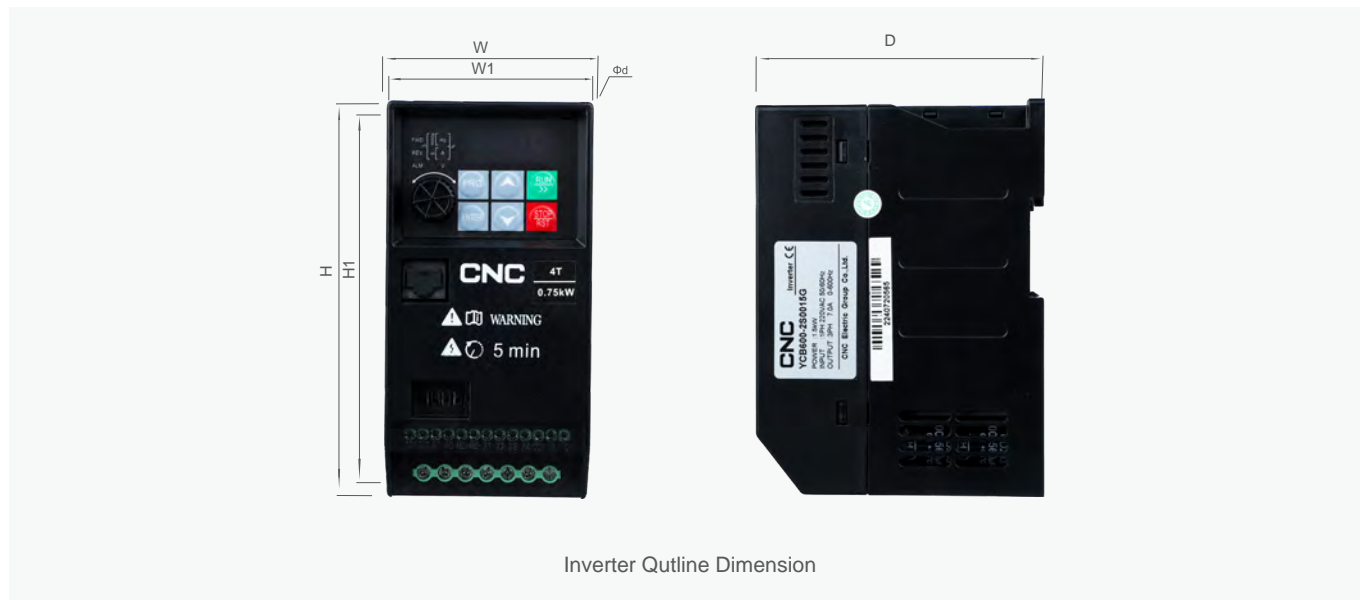


Inverter Model	Power(kg)	Dimension(MM)					
		H	H1	W	W1	D	d
YCB600-2S0004G	0.4	146	136.5	72	63	105	Φ4.5
YCB600-2S0007G	0.75						
YCB600-2S0015G	1.5						
YCB600-2S0022G	2.2						
YCB600-4T0007G	0.75						
YCB600-4T0015G	1.5						
YCB600-4T0022G	2.2						
YCB600-4T0030G	3.0	182	172.5	87	78	127	Φ4.5
YCB600-2S0030G	3.0						
YCB600-4T0040G	4.0						
YCB600-4T0055G	5.5	240	229	118	106	155	Φ5.5
YCB600-4T0040G	4.0						
YCB600-4T0055G	5.5						
YCB600-4T0075G	7.5						
YCB600-4T0110G	11						

Motor Control & Protection

YCB600 Series Vector

Keypad Outline Dimension& Mounting holes Dimension

C

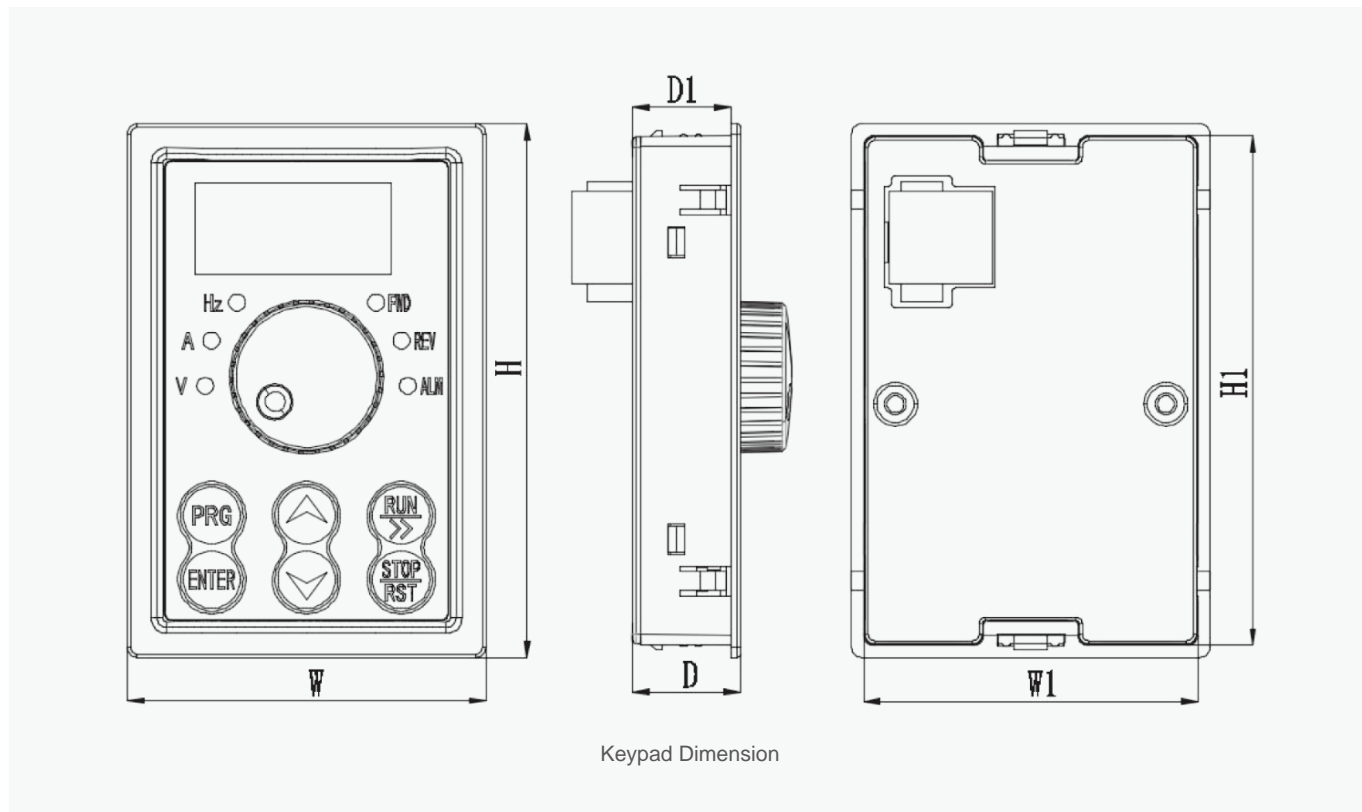

Keypad Dimension

Dimensions of keypad base holes				Keypad thickness	
W	W1	H	H1	D	D1
53mm	49.4mm	79mm	75.4mm	15.9mm	14.5mm

Tips:

- It needs to be equipped with an external display panel, when the YCB600 series operation panel is led out.
- The opening size of the external display panel is: width 49.4mm x height 75.4mm.

Motor Control & Protection

YCQR2 Soft Starter



General

AC squirrel-cage type asynchronous electric motor is a popular electric apparatus. By applying intelligence, the apparatus completes stable load making capacity and reduces impact strength to electrical network; it can work with stable and reliable performance. YCQR2 Model soft starter completes Human-machine interface. It can be applied to a scope of 5.5~600KW in thermal power plant, hydraulic power plant, metallurgy, chemical industry, architecture, cement plant, mining industry as well as environmental protection projects. It's the ideal replacer of Y- Δ Starter, reactor starter, auto-transformer starter etc.

The advanced technology applied prevents the heavy starting current of AC electric motor, influence to voltage quality and power consumption in loop as well as the impact strength to electric apparatus.

Microprocessor is the core of the YCQR2 soft starter. It controls big power thyristor components, to limit starting current, voltage ramp start, soft stop. Technical parameters can be set up to different load. It also has over current, overload and out-of-phase protections. Output voltage of soft start is ascending as per setups, then electric motor torque finishes starting according to optimized speed-up curve, thyristor components breaks, and bypass AC contact starts.

Functions

1. Double Single-chip machine automatic digital control;
2. Parameters like starting torsion current, voltage, and time to be set according to different load, to obtain optimal torque control feature.
3. Smooth and gradual starting process, to reduce the impact strength of electric network, vibration and noise of apparatus, to lengthen lifetime of mechanical driver and to improve working environment.
4. Starting current is adjustable as per load, to reduce starting consumption and to make optimal torque with smallest current.
5. Soft stop function – make long lifetime of electric contacts, meet mechanical requirements under various occasions.
6. Over-current protection, overload protection and thermal protection, outof-phase protection.
7. Extrocontrol interface to facilitate multi-functions: digital delayed start, transient stop control input, start output of time delay relay, fault relay output.
8. No special requirements on the phase sequence to input power.
9. Free stop and soft stop, soft stop time is adjustable.
10. Complete digital control and extrocontrol
11. Standard 485 interface
12. Output 0-20MA analog current
13. Innovative structure, small volume, stable performance, easy installation and operation.
14. Harvard type single-chip machine has strong anti-interruption capacity to prevent the control system from severe electric interruption.



Motor Control & Protection

YCQR2 Soft Starter

Technical data

Item No.	YCQR2
Electric motor power(400v.h)/kw	5.5-600kw
Rated working current Ie/A	10-1200
Rated working voltage / V	380V±15%
Frequency /Hz	50Hz
Continuous working current /A	115% Ie
Rated control voltage/V	AC 220V-240V/50Hz
Ambient temperature /°C	30°C/55°C

Item		Set Range	Factory Value	Illumination
Code	Name			
0	Start Voltage	30-80%	30%	Voltage mode effective
1	Rising Time	0-60S	10S	Voltage mode effective
2	Soft Stop Time	0-60S	2S	Stop freely when set as 0
3	Start Delay	0-240S	0S	Two lines way effective
4	Limiting Start Current	150-500%	250%	Limiting current mode effective
5	Interlock Delay	0-240S	0S	
6	Transient Stop Set	0-1	0	0:yes 1:no
7	Restart After Transient Stop	0-1	0	0:yes 1:no
8	Control Mode	0-1	1	0:limiting current 1:voltage
9	Control Way	1-6	1	1:keyboard 2:outer control 3:keyboard+outer control 4:PC 5:PC+keyboard 6:PC+outer control
A	0-20mA	0-1	0	0:full scale(20mA)corresponding to 400% 1:full scale(20mA)corresponding to 130%
B	Display Mode	0-132	0	0:by percent of rated voltage XXX:actual rated power value
C	Local Address	1-30	0	For serial-port communication
D	Set Parameter Modification	0-1	0	0:yes 1:no
E	Overload Multiple Set	50-200%	150%	
F	Out-of-phase Protection	0-1	0	0:yes 1:no
EY	Modification Set Protection	The data should not be modified in this condition		
-A	Start And Rising Condition	1.displaying current value XXXA or percent of rate value. 2.Delay start time displays time EOTTT		
-A	Operation Condition			
-A	Soft Stop Condition			


Note:Values XO-9

Even if using the voltage mode,the limiting current is still effective,and its value is 400%.

Motor Control & Protection

YCQR2 Soft Starter


Wiring diagram

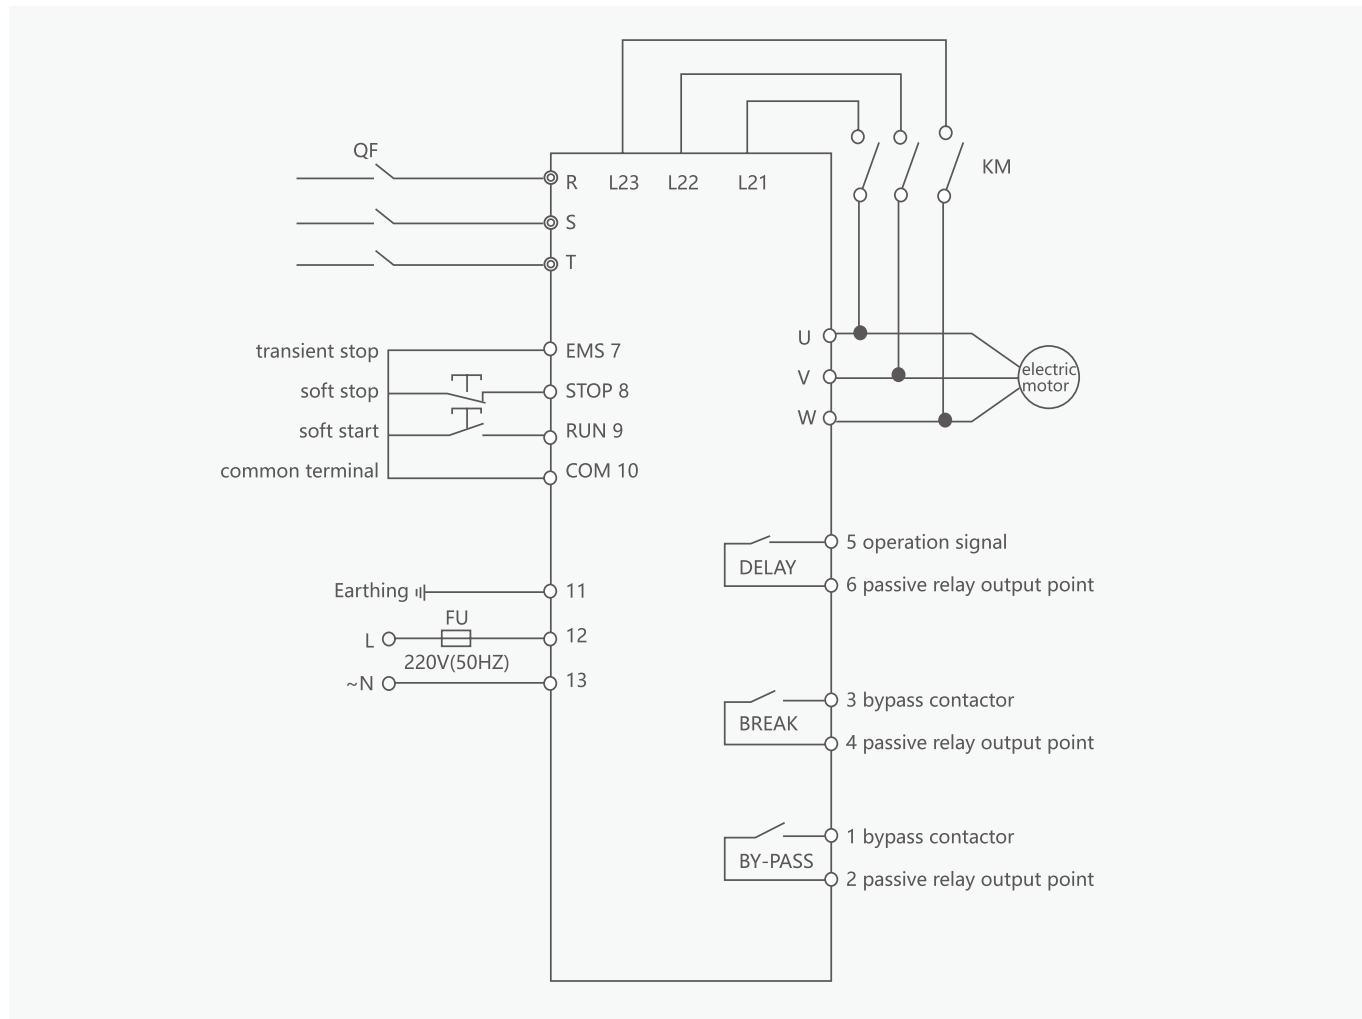

Overall and mounting dimensions(mm)

Plane Structure Picture And Size (see Picture 10.1 and 10.2)

Plane Structure Picture Of Ycqr2 55kw Type

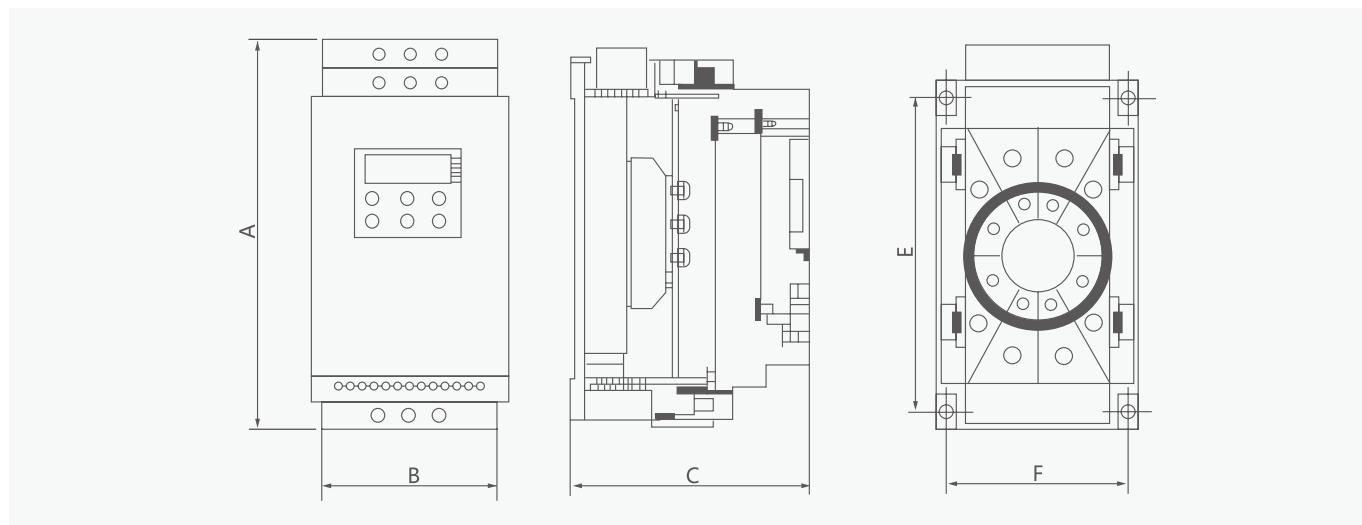

Motor Control & Protection


YCQR2 Soft Starter

YCQR2R 55KW Type

Model	Power (KW)	Rated Current (A)	Outline Size(mm)			Installing Size(mm)		Installing Hole Dimension
			A	B	C	E	F	
YCQR2	5.5-22	10-40	265	154	165	219	140	Φ6
YCQR2	30	54	265	154	165	219	140	Φ6
YCQR2	37	68	265	154	165	219	140	Φ6
YCQR2	45	80	265	154	165	219	140	Φ6
YCQR2	55	100	265	154	165	219	140	Φ6

C

YCQR2 75-600KW Type

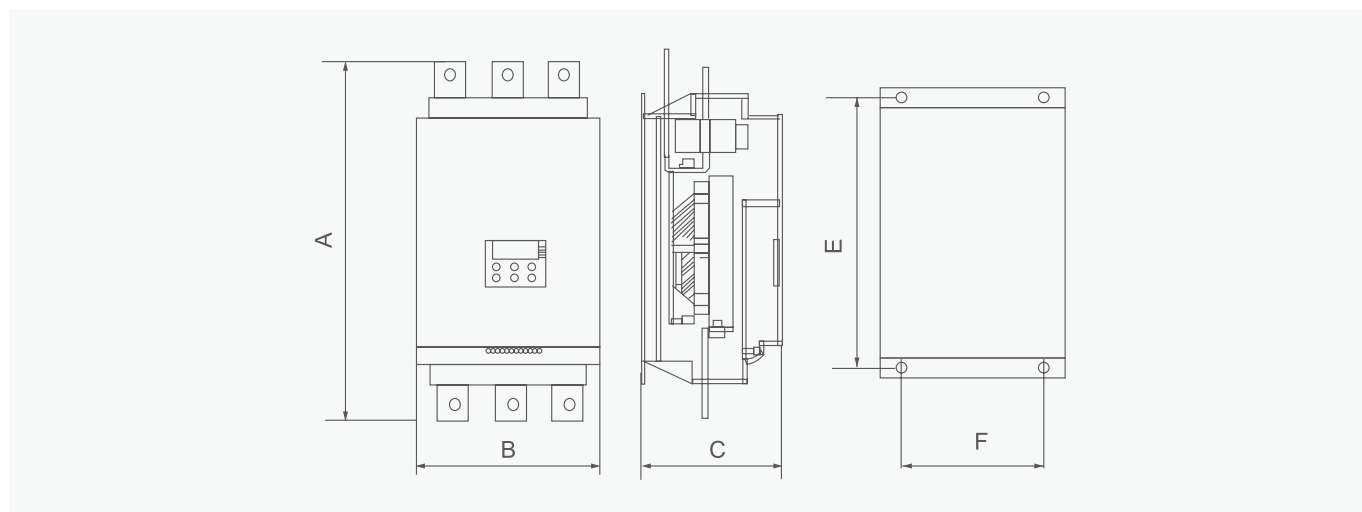

YCQR2 75-600KW Type

Model	Power (KW)	Rated Current (A)	Outline Size(mm)			Installing Size(mm)		Installing Hole Dimension
			A	B	C	E	F	
YCQR2	75	135	531	260	204	380	230	Φ8
YCQR2	90	160	531	260	204	380	230	Φ8
YCQR2	115	200	531	260	204	380	230	Φ8
YCQR2	132	250	531	260	204	380	230	Φ8
YCQR2	160	300	531	260	204	380	230	Φ8
YCQR2	200	360	564	290	204	260	260	Φ8
YCQR2	250	450	564	290	204	260	260	Φ8
YCQR2	320	560	564	290	204	260	260	Φ8
YCQR2	400	800	600	350	220	480	320	Φ8
YCQR2	500	1000	600	350	220	480	320	Φ8
YCQR2	600	1200	600	350	220	480	320	Φ8

Motor Control & Protection


YCQR7 Soft Starter



General

Read the YCQR7 installation instructions carefully before use. If you do not read the relevant instructions carefully, you will violate the relevant safety regulations, which may affect the normal use of the soft starter. To install the YCQR7, please prepare the following tools : small word screwdriver, wire cutter, wrench, etc.

Type designation

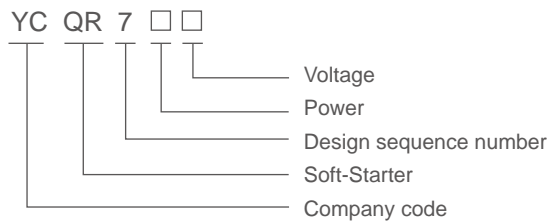

Operating conditions

1. Incoming line power supply: AC 380V \pm 5% 50/60 HZ
2. Power supply is applicable: mouse cage three-phase asynchronous motor
3. Cooling mode: forced air cooling
4. App licable temperature: -10°C ~ \pm 40°C ,1°C,2%, + 50°C
5. App licable humidity: 90% without frost
6. Place of use: No corrosive gas without conductive dust indoor is well ventilated
7. Elevation vibration: The altitude is below 3000 meters, and the vibration power device is below 0.5G

Motor Control & Protection

YCQR7 Soft Starter

Technical data

Project name		performance index
Scope of application		3 phase rat cage asynchronous motor
Power bracket		5.5-450kW
Input voltage		380V ± 15%
Supply frequency		50/60HZ ± 5%
Overload capacity		400%60sec,120% continuous
Adjustable current multiple		From 1 to 5 times each time
Soft up time		1-90 Seconds
Module working mode		over a long period of time
Cooling-down method		forced air cooling
Secondary interace terminal	On-off input	3 Road
	Relay output	1 (programmable) or 3 (programmable)
	4-20MA	Route (extension is optional)
	RS485	1-way (extended as optional)
Protect		Short circuit speed break, overcurrent, overheat protection, reverse time overload, voltage phase deficiency, imbalance, Insient stop, undervoltage, overvoltage, underload, starting failure, phase sequence error.
Host overload protection		Overload and reverse time limit, level 1 -5 is optional
Host current imbalance protection		Unbalanced trip standard: 5- 100% any two-phase unbalanced trip delay: 1-60 seconds can be set
Host short circuit protection		Quick break time . 0.18, can be set
Bus function		Interface : RS485 protocol · ModbusRTU
Human-computer interface		4 Line COG Screen
Language		Chinese, English

C

Motor Control & Protection

YCQR7 Soft Starter

Technical data

Order number	Name	Set the scope	Windows default	Explain
Soft-up parameters				
A1	Start way	0~3	3	0: aging 1: voltage ramp 2: constant current 3: current ramp
A2	Starting voltage	0~100%	45%	0,1,2 The starting mode is effective
A3	Initial current	0~2.5 Times	2.0 Times	Method 3 valid
A4	Flow limit multiple	1.8~6.0 Times	3.5 Times	Method 1,2,3 valid
A5	Sudden jump peak	0~100	90%	
A6	The jump cycle	0~2.0S	0.4S	
A7	Start delay	0~240.0S	0.0S	Delayed start time
A8	Soft up time	0~90.0S	20.0S	All starting modes are valid
A9	Soft stop time	0~60S	0S	Set to 0 no soft stop function, non-0 valid
A10	Joint control delay	0~240.0S	0.0S	Start the delay relay output, use with programmable relay
A11	mode of operation	0~6	3	0: Full open 1: keyboard 2: external control 3: keyboard + external control 4: Communication 5: Communication + keyboard 6: communication + external control
A12	Rated current	0~Current limit	100A	Set according to the rated current on the motor nameplate
A13	Upper limit current	0~200%	120%	The relay is set to feed effectively
A14	Lower limit current	0~120%	90%	The relay is set to feed effectively
A15	actuation time	0~10.0S	1.0S	The relay is set to feed effectively
A16	Soft start plus time	0~60.0S	0	"Soft start time" does not complete the start, automatic extra time
A17	Soft strength	2.0 Times	0	"Soft start time" does not complete the start, automatic extra time
Protection parameters				
A18	Short circuit multiple	0~12.0 Times	5.5 Times	Set greater than (current limit multiple + soft starting force + 0.5), the whole process is effective
A19	Speed break time	0~2.00S	0.20S	Short circuit block (break) time
A20	Overflow multiple	0~8.0	1.2	Bypass effective
A21	Overflow time	0~60.0S	10.0S	If the overflow exceeds this value, block the silicon
A22	Overheat time	0~60.0S	10.0S	When overheating exceeds this value, blocking the SCR, the whole process is effective
A23	Overload curve	1~6	1	Motor reverse time limit protection, reverse time limit curve number, the larger the value, the longer the time, bypass (full pressure) after the effective
A24	Lack of phase time	0~60.0S	10.0S	If the voltage phase deficiency exceeds this value, the SCR is blocked, and the whole process is effective
A25	Current imbalance	0~100%	30%	Current imbalance ratio, soft rise, bypass, soft stop effective
A26	Imbalance time	0~60.0S	5.0S	If the accumulated time of imbalance exceeds this value, block the silicon controller
A27	Underpressure lower limit	0~100%	70%	Full effective
A28	Overpressure time	0~60.0S	2.0S	If the accumulated time of underpressure exceeds this value, the thyristor is blocked
A29	Overpressure upper limit	0~150%	120%	Full effective
A30	Overpressure time	0~60.0S	2.0S	If the cumulative time of overpressure exceeds this value, the thyristors is blocked
A31	Under-load current	0~100%	50%	Lower undercurrent, bypass and full pressure effective
A32	Adue time	0~30.0s	2.0s	If the cumulative time exceeds this value, the thyristor is blocked

Motor Control & Protection


YCQR7 Soft Starter

Order number	Name	Set the scope	Windows default	Explain
Protection switch				
A33	Short-circuiting switch	Close, open	Open	Output short-circuit protection is enabled or prohibited
A34	Overflow switch	Close, open	Open	Overcurrent protection enables or forbids
A35	Overheat switch	Close, open	Open	Overheat protection enables or prohibited
A36	overload cut-out	Close, open	Open	Motor overload protection is enabled or prohibited
A37	Lack of phases switch	Close, open	Open	Input voltage phase absence protection enabled or prohibition
A38	Imbalance switch	Close, open	Open	Current imbalance (output phase deficiency) protection enabled or prohibition
A39	Instantaneous stop switch	Close, open	Open	External instantaneous stop fault protection enabled or prohibited, enabling can be set to self-recovery
A40	Undervoltage switch	Close, open	Open	Input voltage protection enabled or prohibited
A41	Overvoltage switch	Close, open	Open	Input voltage overvoltage protection enable or prohibited
A42	Starting failure	Close, open	Open	Motor is not enabled or prohibited by full speed protection during bypass (or full pressure)
A43	Underload switch	Close, open	Open	Underload protection is enabled or prohibited
A44	Phase sequence switch	Close, open	Open	Phase order error protection enables or prohibition
Communication parameters : not considered when not used				
A45	principal and subordinate	0,1,2	0	0:Close 1:Host 2:slave
A46	Stop number	0~32	1	
A47	Digit capacity	0~12	8	Usually set to 8
A48	Stop bit	0~2	0	Usually set to 1
A49	Even-odd check	0~2	1	Usually set to 0
A50	Baud rate	0~96	8	Actual baud rate=baud rate*1200
A51	Current range	0~600	1000	4 mA corresponds to 0 and 20 mA corresponds to range values
Control				
A52	Customer privilege			Password 10, go to the customer privilege menu
A53	Manufacturer setting			Password 111, enter the manufacturer setting menu


Motor Control & Protection

YCQR7 Soft Starter

Wiring diagram

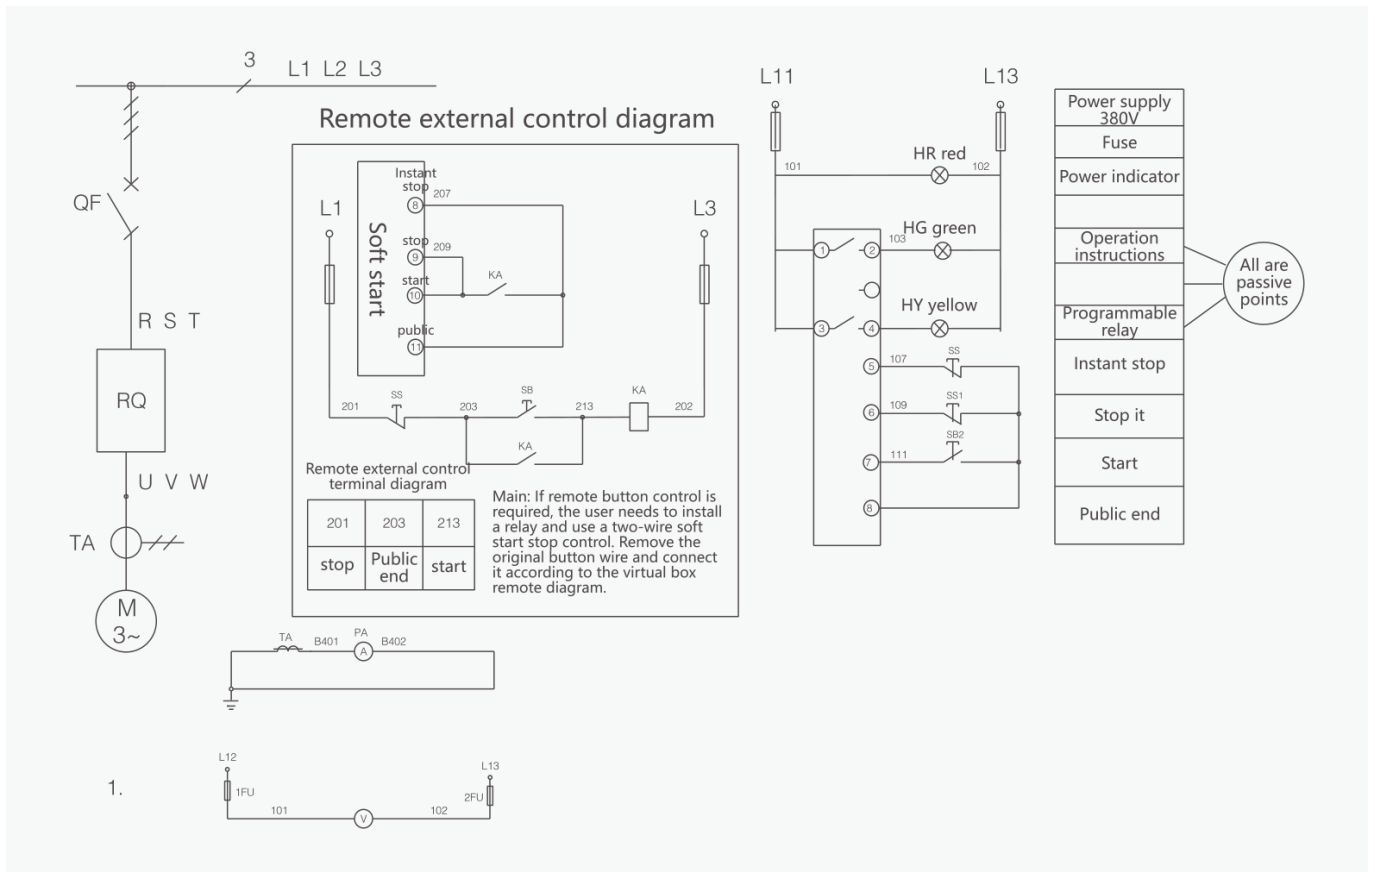

Overall and mounting dimensions(mm)

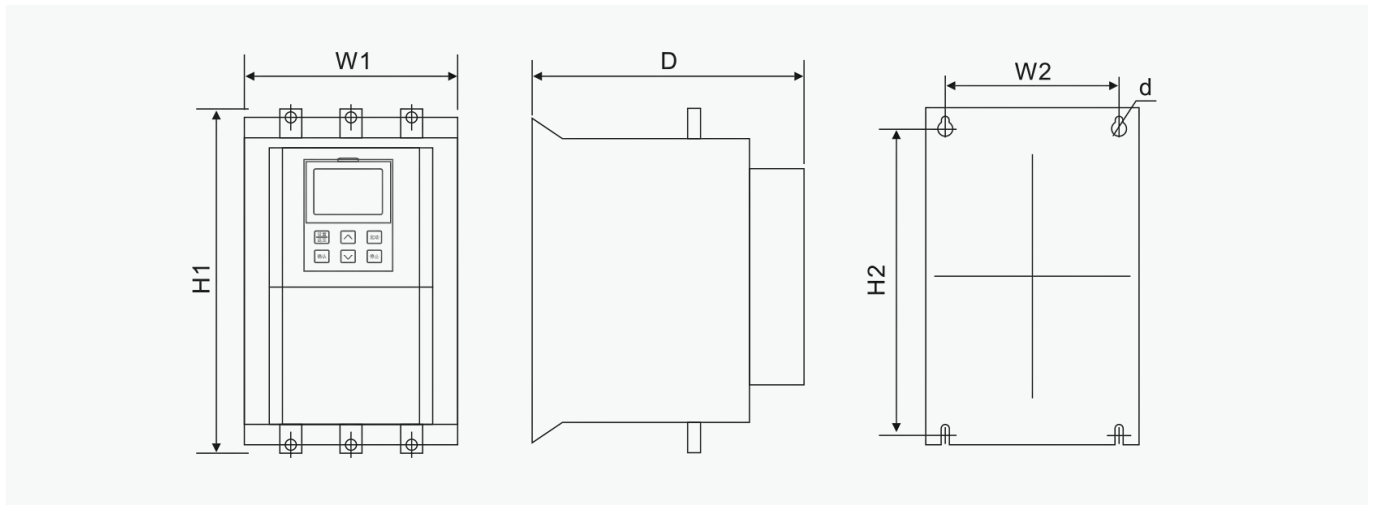

Specifications and models	Overall dimensions(mm)			Installation size(mm)		
	W1	H1	D	W2	H2	D
5.5kW-37kW	105	240	170	85	214	M6
45kW-75kW	150	280	179	117	240	M6
90kW-115kW	200	370	214	168	328	M6

Motor Control & Protection

YCQR7-G Soft Starter




General

The YCQR7-G soft starter control cabinet is used in situations where a motor is running. The control cabinet contains a soft starter primarily used for the smooth start of the motor, avoiding the impact and pressure during startup. It is typically employed in scenarios with large motors or where frequent starting and stopping is required, extending the motor's lifespan and enhancing system stability.

Soft starter cabinets are widely used in industrial sectors, energy fields, mining, and other heavy-duty equipment applications.

Type designation

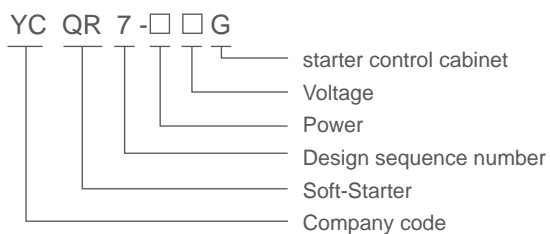

Operating conditions

1. Incoming line power supply: AC 380V \pm 5% 50/60 Hz
2. Power supply is applicable: mouse cage three-phase asynchronous motor
3. Cooling mode: forced air cooling
4. App licable temperature: -10°C ~ \pm 40°C ,1°C,2%, + 50°C
5. App licable humidity: 90% without frost
6. Place of use: No corrosive gas without conductive dust indoor is well ventilated
7. Elevation vibration: The altitude is below 3000 meters, and the vibration power device is below 0.5G.

Motor Control & Protection

YCQR7-G Soft Starter

Technical data


Project name		performance index
Scope of application		3 phase rat cage asynchronous motor
Power bracket		5.5-450kW
Input voltage		380V ± 15%
Supply frequency		50/60HZ ± 5%
Overload capacity		400%60sec,120% continuous
Adjustable current multiple		From 1 to 5 times each time
Soft up time		1-90 Seconds
Module working mode		over a long period of time
Cooling-down method		forced air cooling
Secondary interace terminal	On-off input	3 Road
	Relay output	1 (programmable) or 3 (programmable)
	4-20MA	Route (extension is optional)
	RS485	1-way (extended as optional)
Protect		Short circuit speed break, overcurrent, overheat protection, reverse time overload, voltage phase deficiency, imbalance, Insient stop, undervoltage, overvoltage, underload, starting failure, phase sequence error.
Host overload protection		Overload and reverse time limit, level 1 -5 is optional
Host current imbalance protection		Unbalanced trip standard: 5- 100% any two-phase unbalanced trip delay: 1-60 seconds can be set
Host short circuit protection		Quick break time . 0.18, can be set
Bus function		Interface : RS485 protocol · ModbusRTU
Human-computer interface		4 Line COG Screen
Language		Chinese, English

C


Motor Control & Protection

YCQR7-G Soft Starter

Wiring diagram

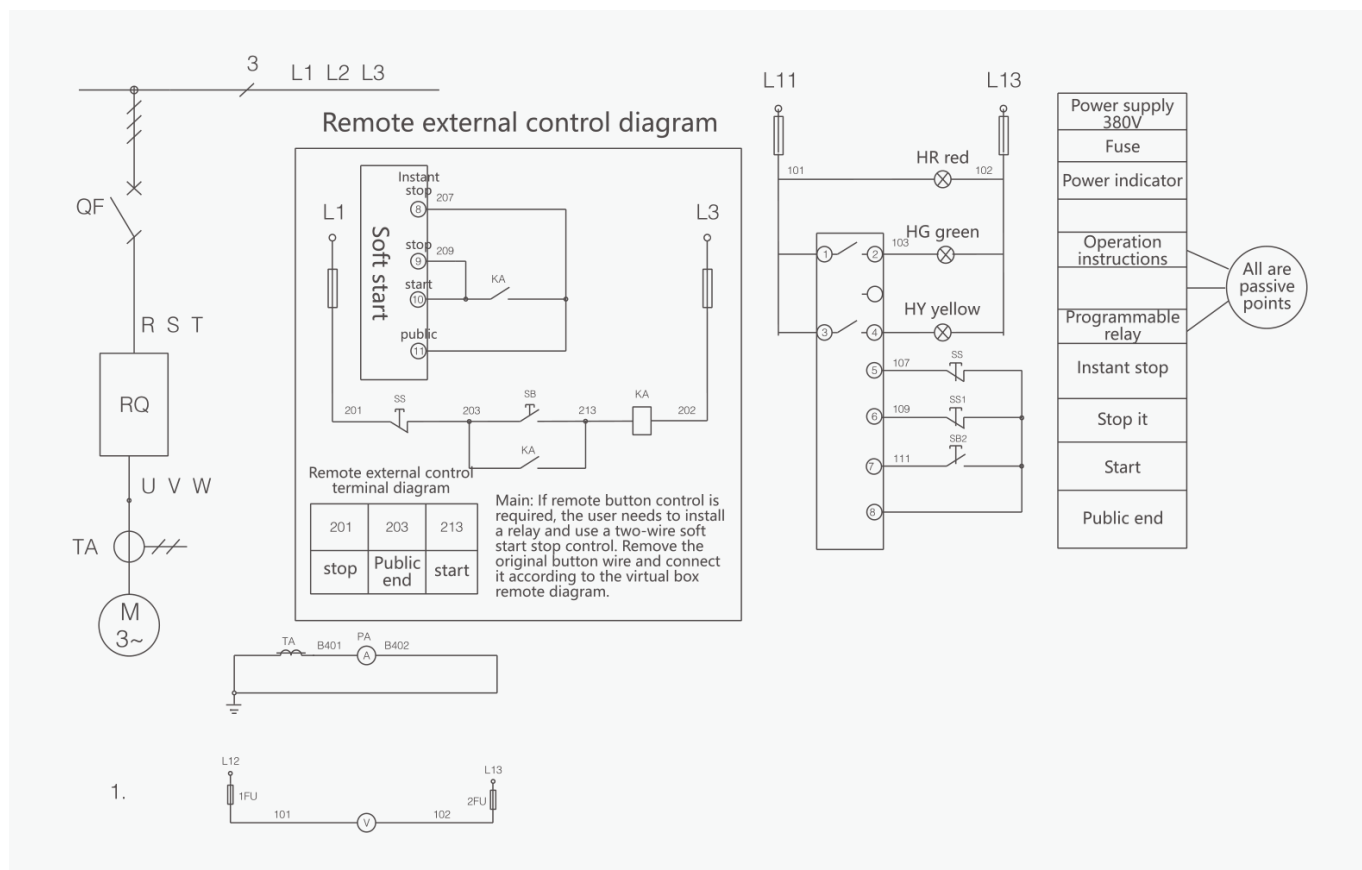

Overall and mounting dimensions(mm)

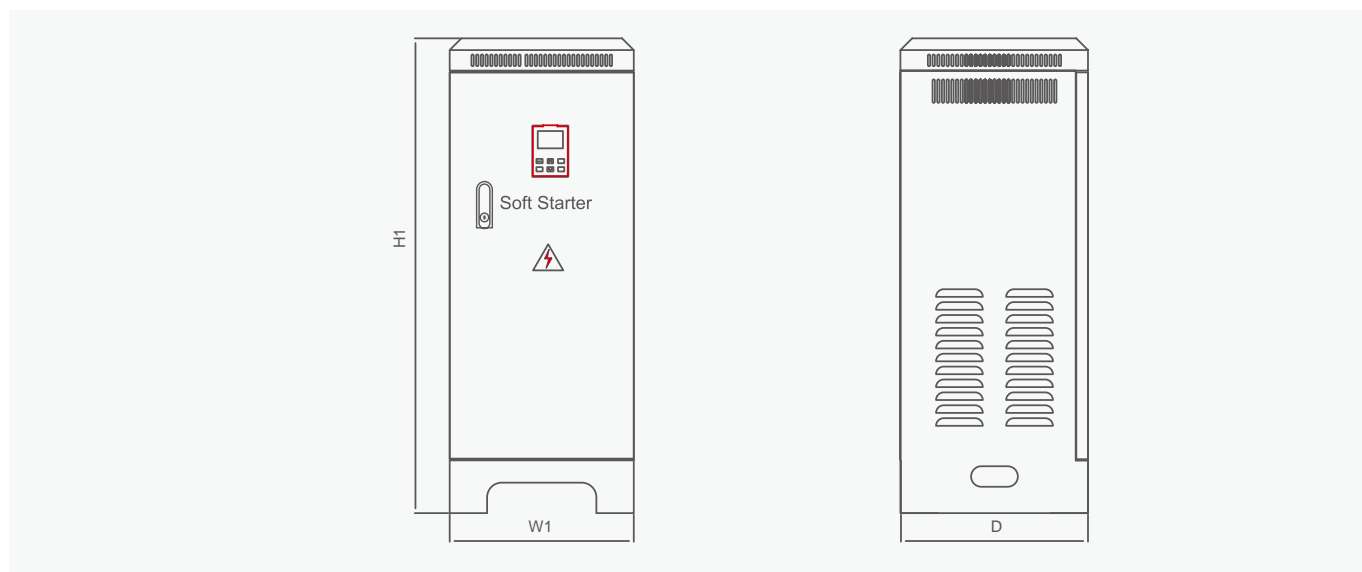

Specifications and models	Overall dimensions(mm)			
	D	W1	H1	D
YCQR7-G	5.5KW-30KW	315	810	320
	37KW-45KW	350	1000	400
	55KW-115KW	400	1160	400


YCQR8 Bypass Soft Starter



General

The main function of the built-in bypass soft starter is to reduce the pressure on the motor during startup by controlling the voltage and current changes, thereby increasing startup efficiency and extending the motor's lifespan. The built-in bypass soft starter typically includes bypass contactors and control power supplies, enabling a smooth transition to bypass mode during startup to prevent the motor from experiencing excessive current and voltage shocks.

Type designation

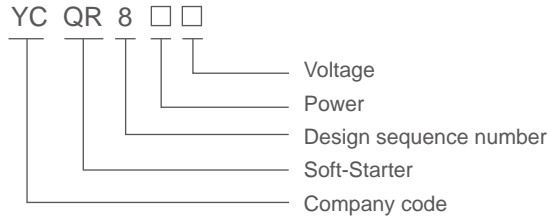

Operating conditions

1. Incoming line power supply: AC 380V ± 5% 50/60 Hz
2. Power supply is applicable: mouse cage three-phase asynchronous motor
3. Cooling mode: forced air cooling
4. App licable temperature: -10°C ~ ± 40°C ,1°C,2%, + 50°C
5. App licable humidity: 90% without frost
6. Place of use: No corrosive gas without conductive dust indoor is well ventilated
7. Elevation vibration: The altitude is below 3000 meters, and the vibration power device is below 0.5G

Technical data

project name	performance index
Adaptation power range	The built-in bypass soft starter of YCQR8 series is adapted for power ranging from 5.5 to 630 kW.
Starting method	Supports multiple starting methods, including current-limiting start and voltage ramp start. It is also capable of applying programmable jog start and start current limiting under each method.
Protection functions	Equipped with various protection functions, including overcurrent protection, input/output phase loss protection, thyristor short-circuit protection, overheat protection, leakage detection, electronic thermal overload protection, etc.
Communication functions	Some built-in bypass soft starters support MODBUS-RTU communication, allowing connection with up to 32 devices, and enabling automatic communication through setting baud rate and communication address.
Adaptive power frequency	The built-in bypass soft starter features adaptive power frequency for 50/60Hz.
Other parameters	It has a 4-20mA current output function, suitable for various industrial environments, with strong anti-interference capabilities and easy adjustment methods






Motor Control & Protection

YCQR8 Bypass Soft Starter


Function description

Terminal wiring

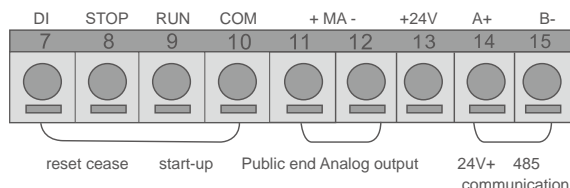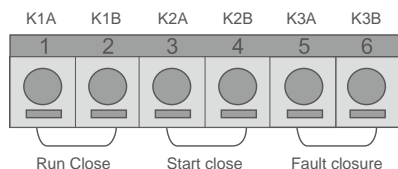

External keyboard

C

Classification	Terminal markings	Terminal name	Function Description
Contact output(assive)	1,2	Start to the topNo delay inputOut (closed)	The built-in bypass soft starter of YCQR8 series is adapted for power ranging from 5.5 to 630 kW. 
	3,4	Initiate a mission Lingshi (closed)	Supports multiple starting methods, including current-limiting start and voltage ramp start. It is also capable of applying programmable jog start and start current limiting under each method.
	5,6	Fault occurs Time(closed)	Equipped with various protection functions, including overcurrent protection, input/output phase loss protection, thyristor short-circuit protection, overheat protection, leakage detection, electronic thermal overload protection, etc.
Contact input(Active)	7	Instantaneous stop input	Some built-in bypass soft starters support MODBUS-RTU communication, allowing connection with up to 32 devices, and enabling automatic communication through setting baud rate and communication address.
	8	Soft stop input	The built-in bypass soft starter features adaptive power frequency for 50/60Hz.
	9	Start Input	Supports multiple starting methods, including current-limiting start and voltage ramp start. It is also capable of applying programmable jog start and start current limiting under each method.
	10	Public end	Equipped with various protection functions, including overcurrent protection, input/output phase loss protection, thyristor short-circuit protection, overheat protection, leakage detection, electronic thermal overload protection, etc.
Analog quantity output	11,12	Analog output	11,12 can measure the current signal that changes with the load, output 4-20mA, or 0-20mA optional,calibrationValue 100,calculation formula: $D = \frac{100}{16} (I_x - 4)$. Where I_x is the actual16measured current value (mA),and D is the motorLoad current (%)(can also be understoodas the rated current corresponding to the soft start setting of 20mA)
DC voltage output	13(24V+) 10(COM)		Can carry a 0.2A DC load, with 13 (24V+)as the positive pole of thepower supply and 10(COM)as the negative pole of the power supply
485 communi-cation	14,15		Please refer to 485 communication protocol for details


Motor Control & Protection

YCQR8 Bypass Soft Starter

(1). Contact input terminal

- Use external terminals to control the start and stop functions of the soft starter. Please set the start stop control to I (keyboard+terminal).
- If remote control requirements are required, it is recommended to use the (second line) control method.
- The input terminal and common terminal of the contact signal are generally in an ON/OFF action, which can cause interference in soft start-ersmotors, and wiring, therefore wiring is necessary. Please use shielded wires for cables that are as short as possible (less than 20m).
- The wiring of control terminals must be as far away as possible from the wiring of the main circuit. Otherwise, it may cause erroneous actions due to interference.

2. External control wiring method




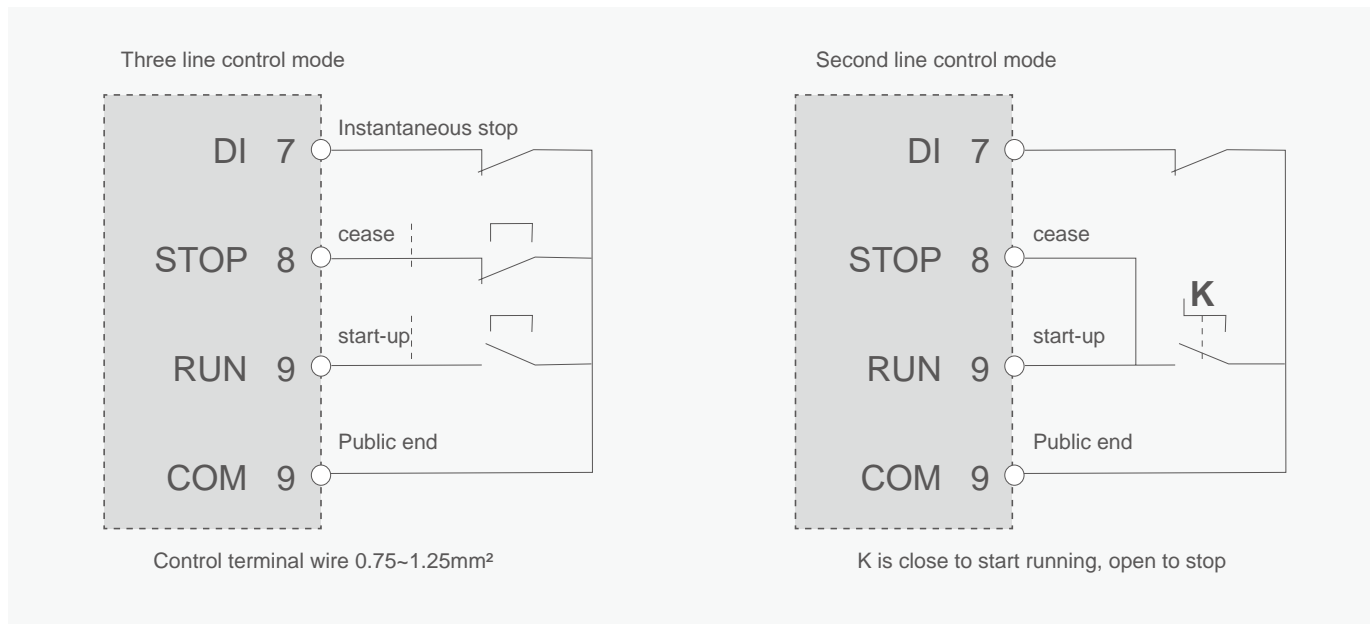


C

Motor Control & Protection

YCQR8 Bypass Soft Starter


3. Relay and remote control wiring diagram

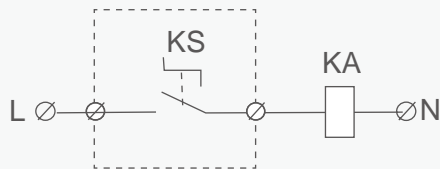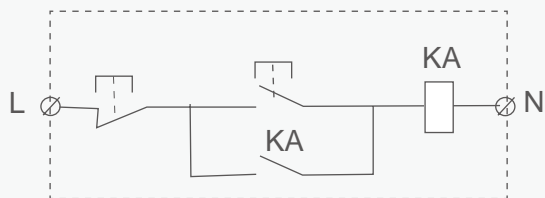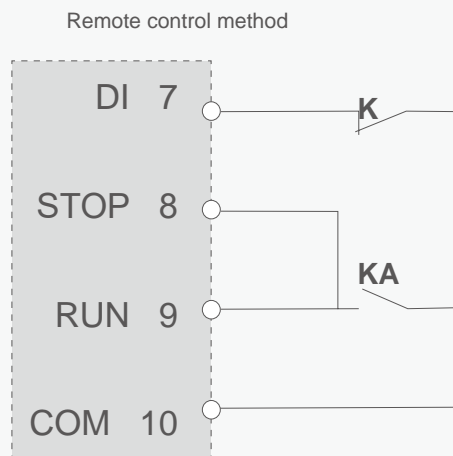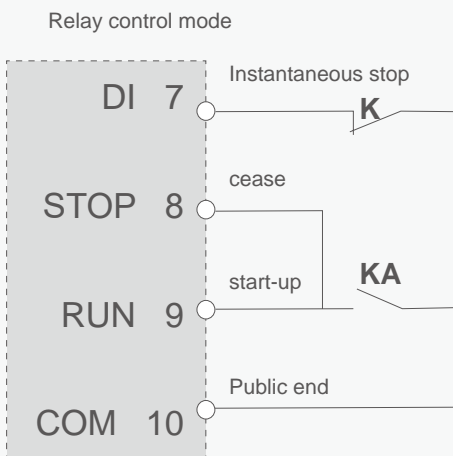

K is the normally closed point for connecting other protective devices (such as thermal protectors), which is short circuited when leaving the factory.

Motor Control & Protection


YCQR8 Bypass Soft Starter

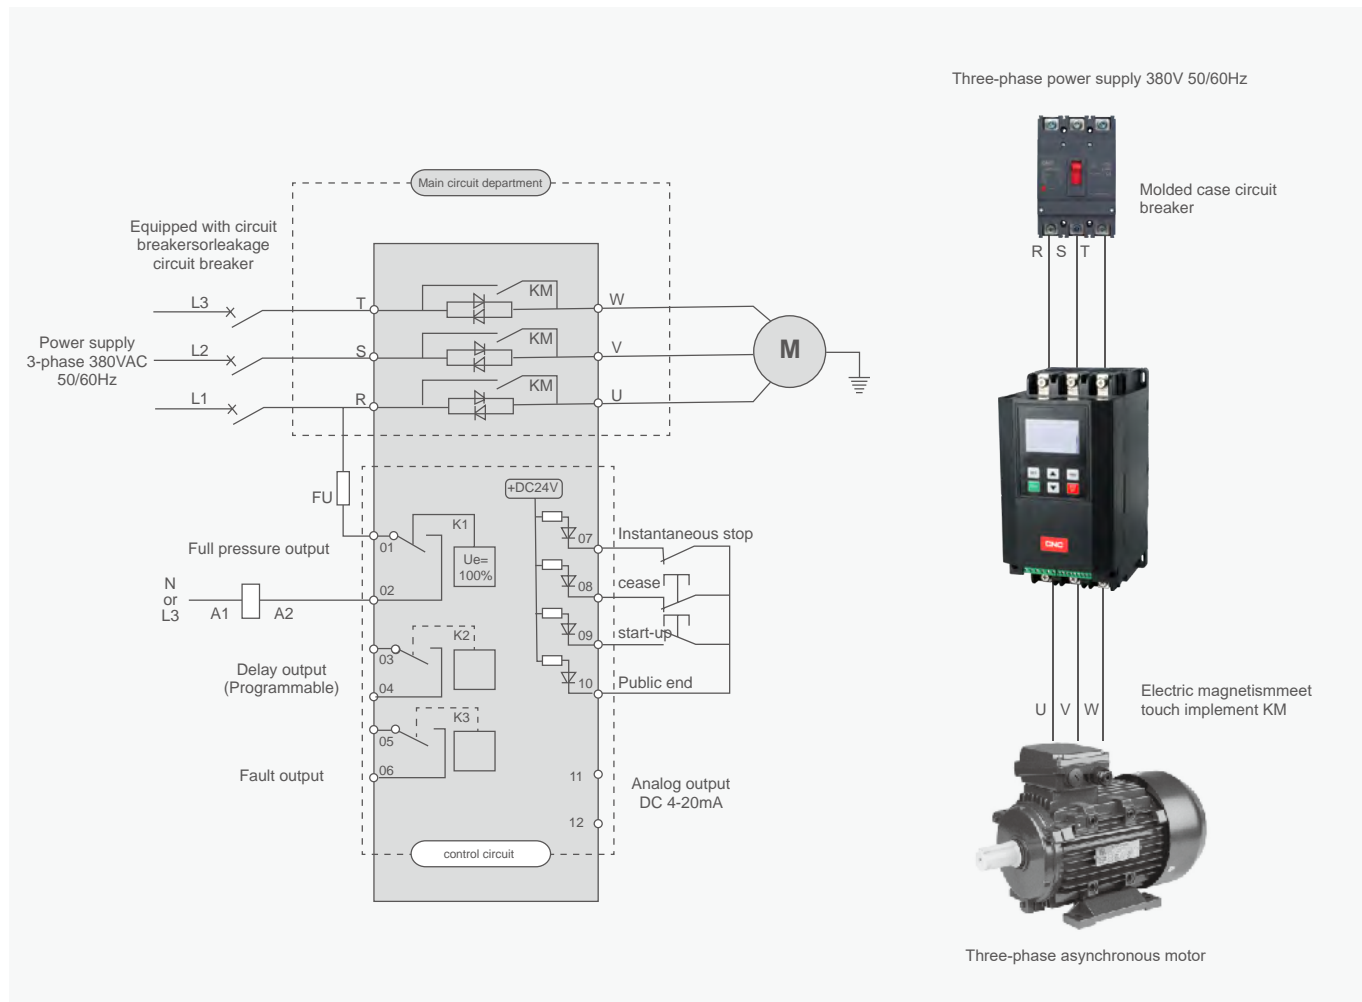

Motor Control & Protection

YCQR8 Bypass Soft Starter


Wiring diagram

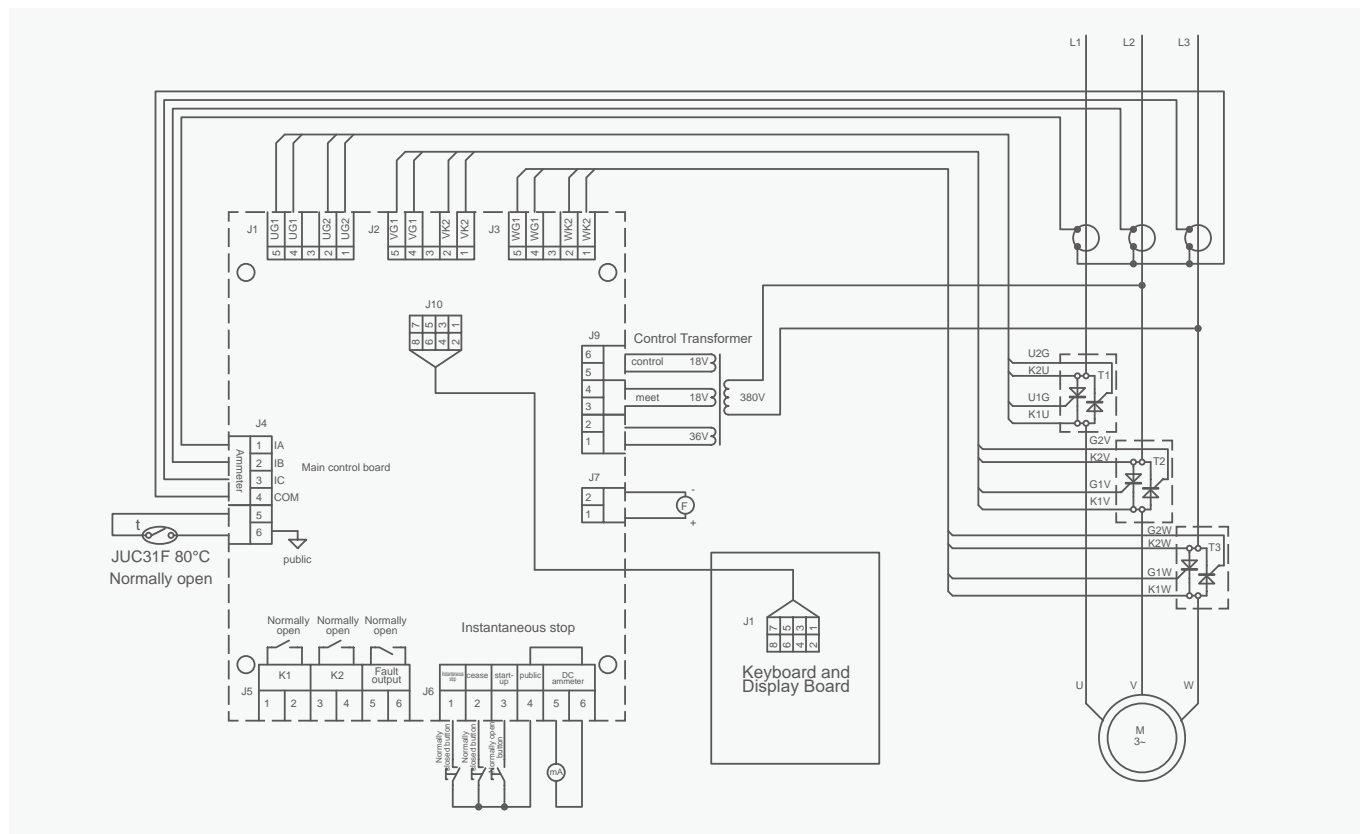

Motor Control & Protection

YCQR8 Bypass Soft Starter

Overall and mounting dimensions(mm)

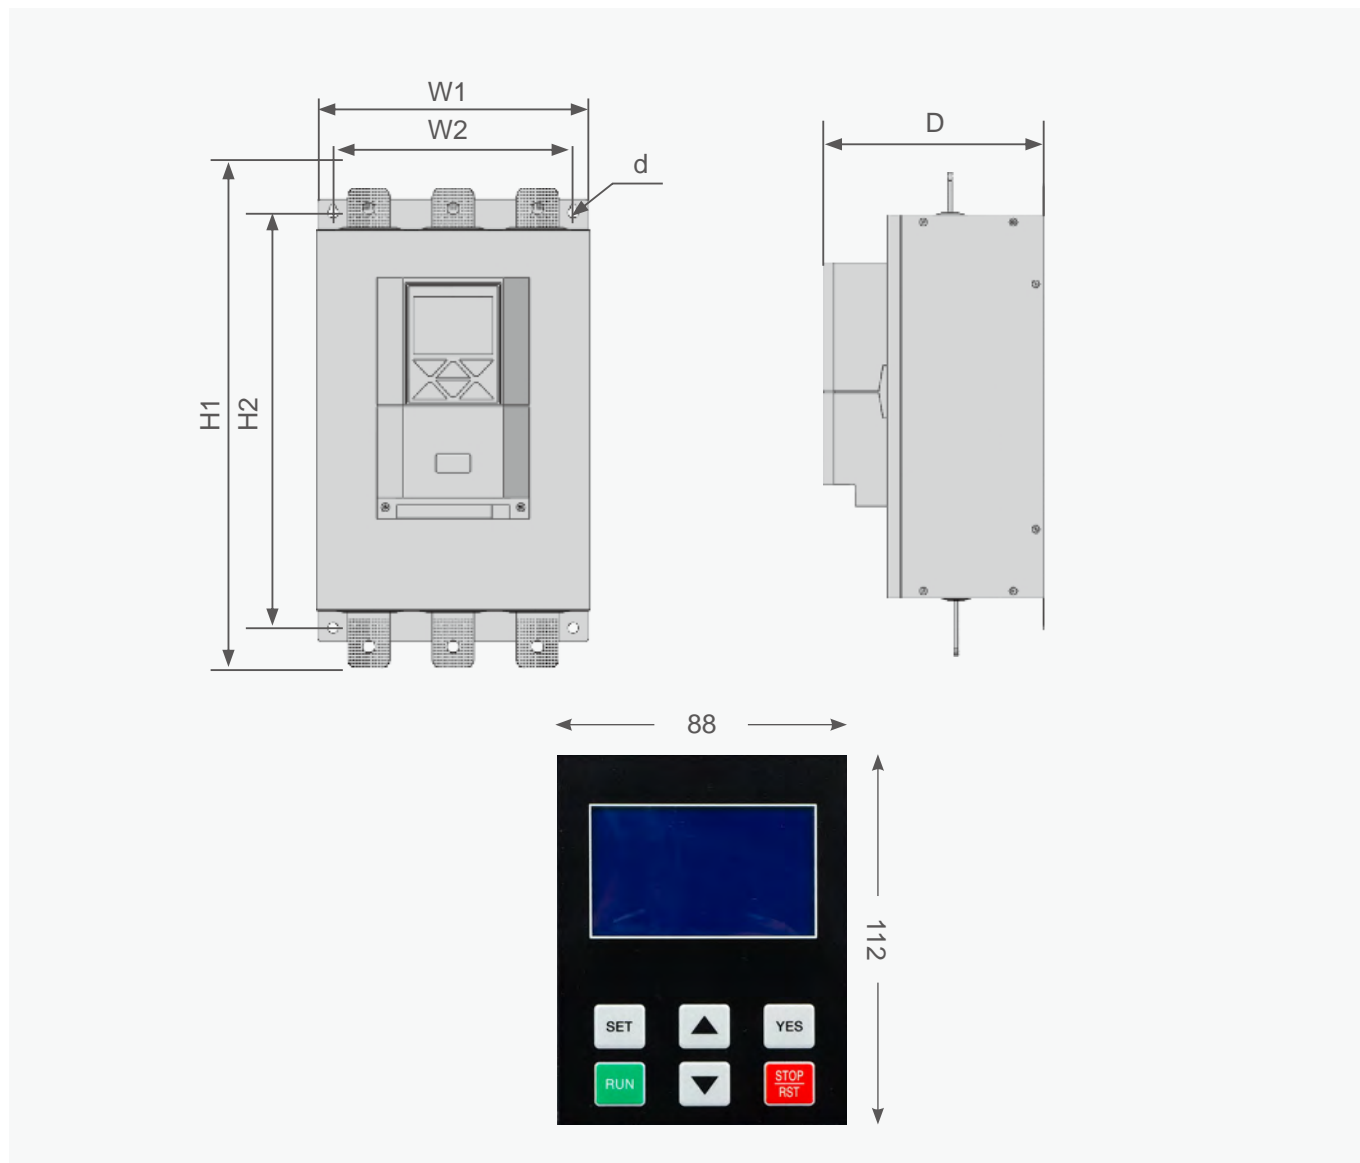

C

Model number	W1	H1	D
YCQR8-22KW-37KW AC220V	150	285	195
YCQR8-45KW-55KW AC220V	210	370	240
YCQR8-75KW-115KW AC220V	260	540	255
YCQR8-132KW-160KW AC220V	300	635	275
YCQR8-185KW-220KW AC220V	400	730	295
YCQR8-22KW-75KW AC380V	150	285	195
YCQR8-90KW-115KW AC380V	210	370	240
YCQR8-132KW-220KW AC380V	260	540	255
YCQR8-250KW-350KW AC380V	300	635	275
YCQR8-400KW-500KW AC380V	400	730	295