

# Modular DIN Rail

## YCB6 Series



Page A03  
**YCB6H-63**  
Miniature Circuit Breaker



Page A05  
**YCB6 Series**  
Circuit Breaker Accessories



Page A07  
**YCB6HLN-63**  
Residual Current Circuit Breaker with Over Current Protection




Page A09  
**YCB6HLE-63**  
Residual Current Circuit Breaker with Over Current Protection



Page A11  
**YCB6N-32**  
Miniature Circuit Breaker DPN



Page A13  
**YCB1-125**  
Miniature Circuit Breaker



Page A15  
**YCB1LE-125**  
Residual Current Circuit Breaker with Over Current Protection



Page A17  
**YCH6Z-125**  
Isolating Switch



Page A19  
**YCB6RL-63**  
RCCB Electromagnetic

## YCB7 Series



Page A23  
**YCB7-63N**  
Miniature Circuit Breaker



Page A26  
**YCB7LE-63Y**  
Residual Current Circuit Breaker with Over Current Protection



Page A28  
**YCB7LE-63**  
Residual Current Circuit Breaker with Over Current Protection



Page A30  
**YCB7-125**  
Miniature Circuit Breaker



Page A32  
**YCB7LE-125**  
Residual Current Circuit Breaker with Over Current Protection



Page A34  
**YCB7RL-100**  
RCCB Electromagnetic



Page A36  
**YCH7-125**  
Isolating Switch

# Modular DIN Rail

## YCB9 Series



Page A40  
**YCB9-80M/H**  
Miniature Circuit Breaker



Page A43  
**YCB9 Series**  
Circuit Breaker Accessories



Page A45  
**YCB9-63**  
Miniature Circuit Breaker



Page A47  
**YCB9N-40**  
Miniature Circuit Breaker DPN



Page A49  
**YCB9NL-40**  
Residual Current Circuit Breaker with Over Current Protection



Page A51  
**YCB9L-40**  
Residual Current Circuit Breaker with Over Current Protection



Page A53  
**YCB9HL-63**  
Residual Current Circuit Breaker with Over Current Protection



Page A57  
**YCB9LE-80M**  
Residual Current Circuit Breaker with Over Current Protection



Page A59  
**YCB9RL-100**  
RCCB Electromagnetic



Page A61  
**YCB9-125**  
Miniature Circuit Breaker



Page A63  
**YCH9-40**  
Isolating Switch



Page A65  
**YCH9-125**  
Isolating Switch

## Smart circuit breaker



Page A67  
**YCB9ZF-100AP 4G**



Page A67  
**YCB9ZF-100AP WIFI**



Page A67  
**YCB9ZF-100W WIFI**



Page A74  
**YCSi**

## Smart switch controller



Page A76  
**YCWY-Y02 WIFI**

## Modular DIN Rail

### Changeover switch



Page A80  
YCBZ-40



Page A81  
YCBZ-63



Page A82  
YCBZ-125

### Indicator



Page A83  
ADM



Page A84  
YCD9

### Voltage meter



Page A85  
YCMV3

### Overvoltage and undervoltage protector



Page A87  
YC6VA  
Overvoltage and  
Undervoltage Protector



Page A89  
YC6VAZs  
Electronic  
phase switch



Page A91  
YC6VAs/YC6Vs  
Overvoltage and  
undervoltage protector



Page A94  
YC9VA  
Voltage protector  
with current control



Page A97  
YC9VA-3  
Voltage protector  
with current control



Page A101  
YCZF6  
Self-recovery Overvoltage  
and Undervoltage Protector

### Modular socket



Page A103  
TMS-5

### Surge protection device



Page A104  
YCS6-B  
(30~60kA)  
(40~80kA)  
(60~100kA)



Page A105  
YCS6-C  
(20~40kA)  
(15~30kA)



Page A106  
YCS6-D  
(10~20kA)  
(5~10kA)

## Modular DIN Rail

### Modular contactor



Page A107  
YCCH6  
Automatic type



Page A107  
YCCH7  
Manual automatic  
integration

### Consumer box



Page A110  
YCX1  
Surface Mount Distribution Box  
(IP40)



Page A111  
YCX2  
Flush Mount Distribution Box  
(IP40)



Page A112  
YCX3  
Surface Mount Distribution Box  
(IP40)



Page A113  
YCX6  
Lighting Distribution Box  
(IP40)



Page A114  
HA  
Water proof Distribution Box  
(IP65)



Page A115  
SH-Q3  
Water proof Junction Box  
(IP65 without hole IP54 with hole)



Page A116  
YCS1  
Enclosure  
(IP65)

### Busbar



Page A31  
Busbar Pin



Page A31  
Busbar Fork

### Low voltage fuse



Page A31  
RT18



Page A31  
RT18L


# YCB6 Series



- Reliable performance for more safety
- Convenient to use


## YCB6 Series MCB

Overview

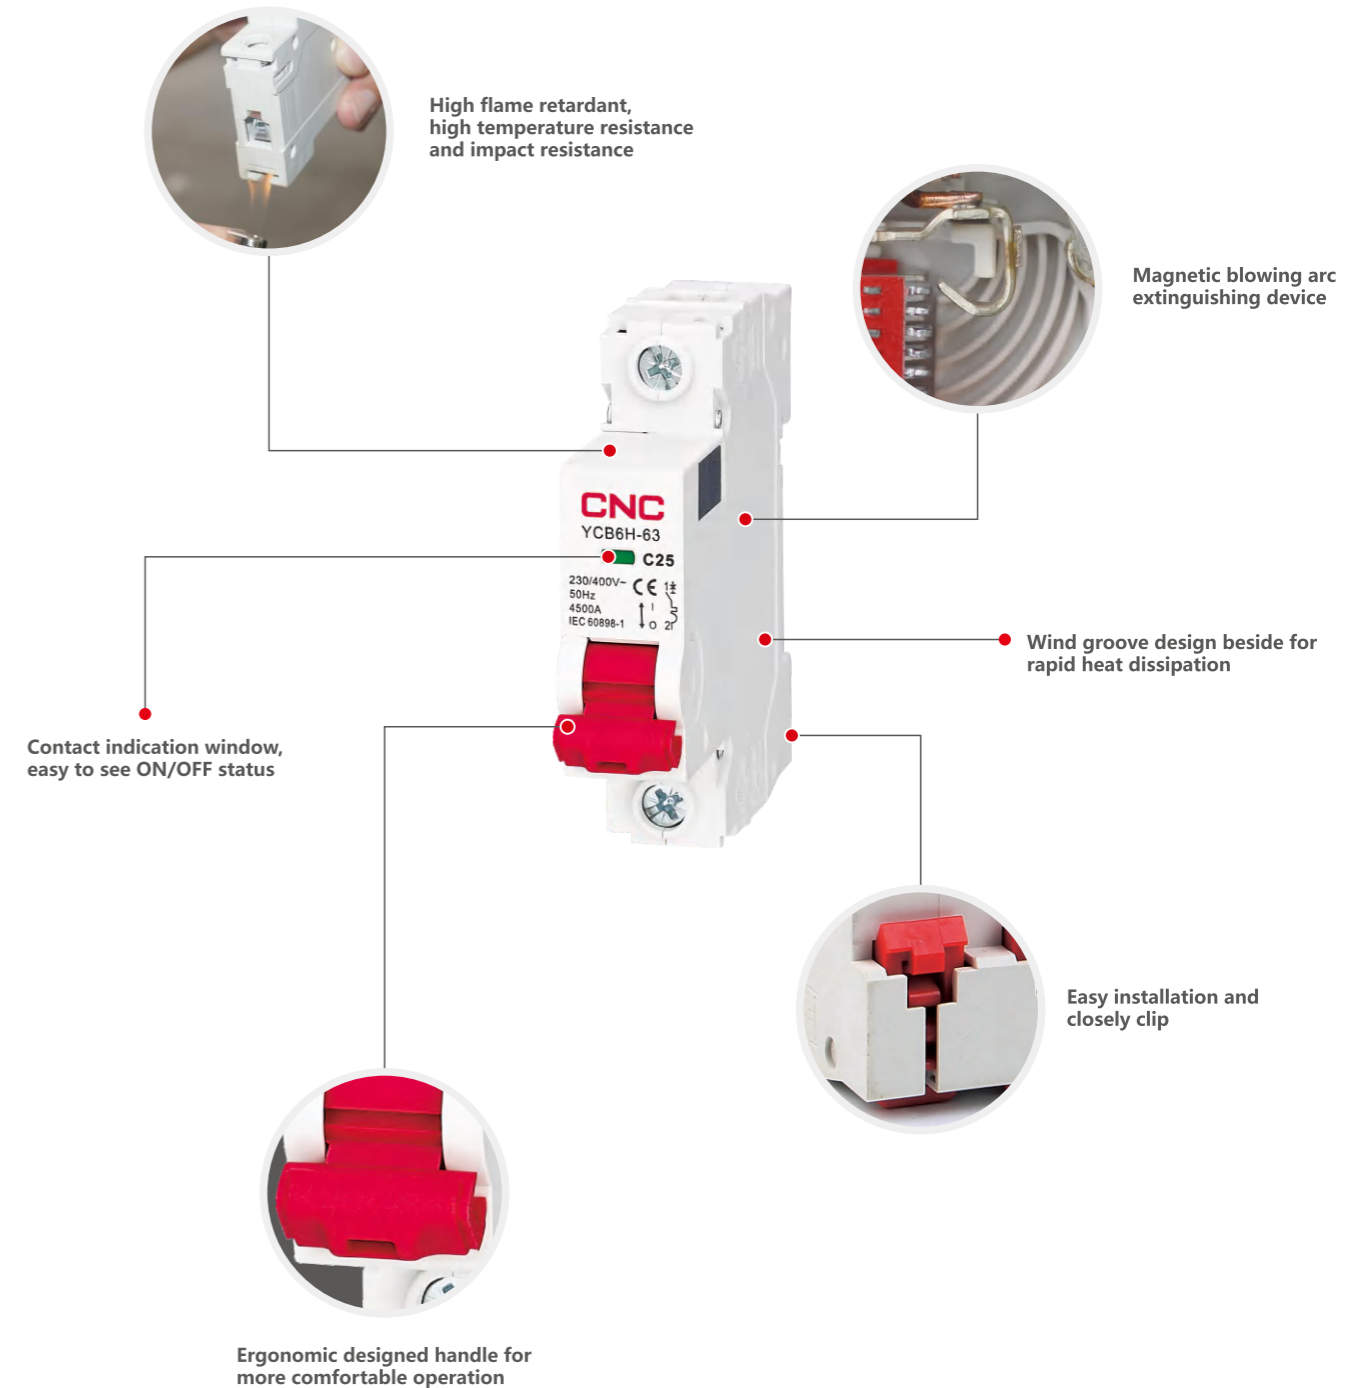



**Modular DIN Rail**  
**YCB6H-63 MCB**

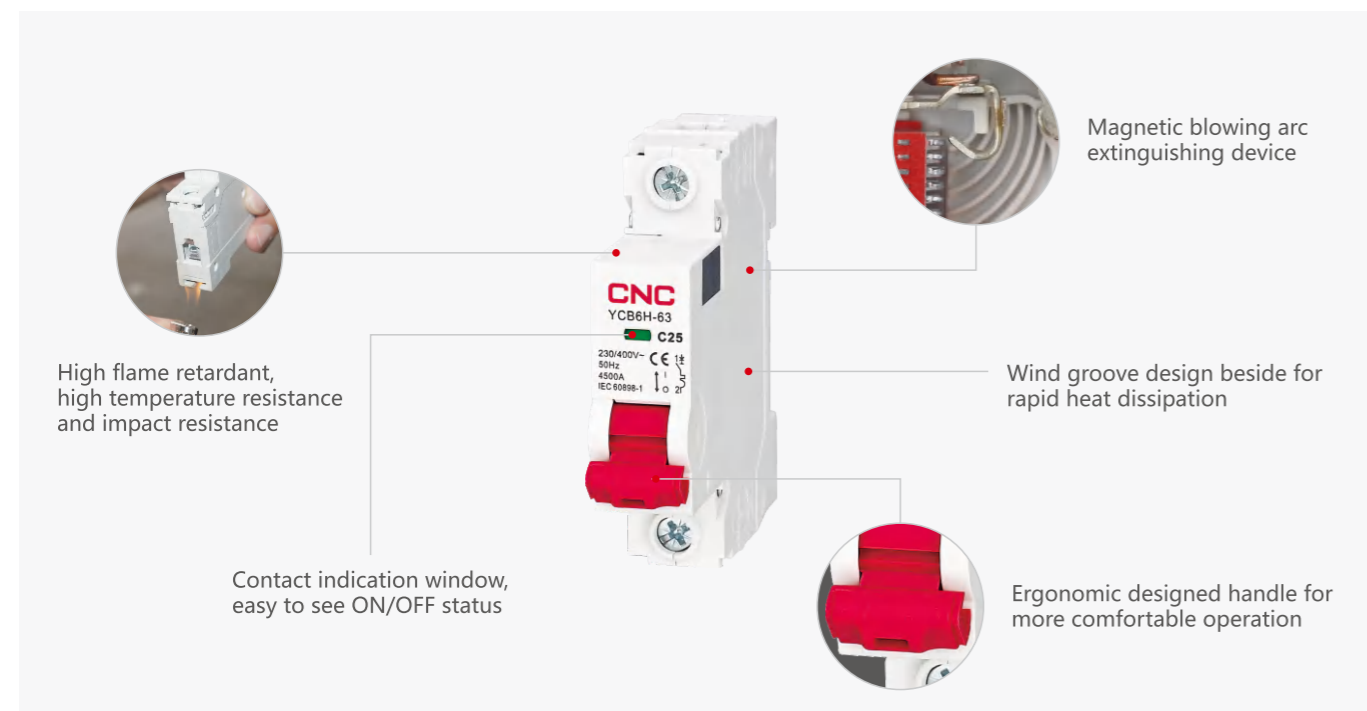


**General**

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure
5. According to the type of instantaneous release classified as follows: type B(3-5)I<sub>n</sub>, type C(5-10)I<sub>n</sub>, type D(10-20)I<sub>n</sub>

**Selection**

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h(I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h(I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h(I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	Tripping
	1.45I <sub>n</sub>	t < 2h(I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	
B,C,D	2.55I <sub>n</sub>	1s < t < 60s(I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	Tripping
	2.55I <sub>n</sub>	1s < t < 120s(I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

**Curve**

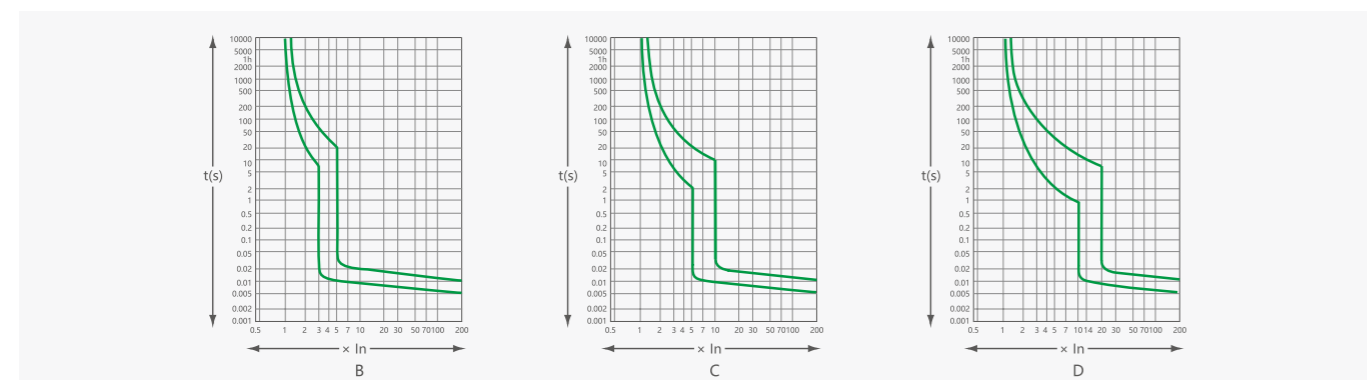


**Modular DIN Rail**  
**YCB6H-63 MCB**

**Technical data**

Type	Standard		IEC/EN 60898-1	
Electrical features	Rated current I <sub>n</sub>	A	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63	
	Poles	P	1, 2, 3, 4	
	Rated voltage U <sub>e</sub>	V	230/400	
	Insulation voltage U <sub>i</sub>	V	500	
	Rated frequency	Hz	50/60	
	Rated breaking capacity	A	4500	
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4000	
	Dielectric test voltage at ind. Freq. for 1min	kV	2	
	Pollution degree			2
	Thermo-magnetic release characteristic			B, C, D
Mechanical features	Electrical life	t	6000	
	Mechanical life	t	20000	
	Protection degree		IP20	
	Reference temperature for setting of thermal element	°C	30	
	Ambient temperature (with daily average ≤ 35°C)	°C	-5 ~ +40	
Storage temperature	°C	-25 ~ +70		
Installation	Terminal connection type		Cable/Pin-type busbar	
	Terminal size top / bottom for cable	mm <sup>2</sup>	25	
		AWG	18-3	
	Terminal size top / bottom for busbar	mm <sup>2</sup>	25	
		AWG	18-3	
	Tightening torque	N*m	2	
		In-lbs	18	
	Mounting		On DIN rail EN 60715(35mm)by means of fast clip device	
Connection		From top or bottom		

**Overall and mounting dimensions(mm)**

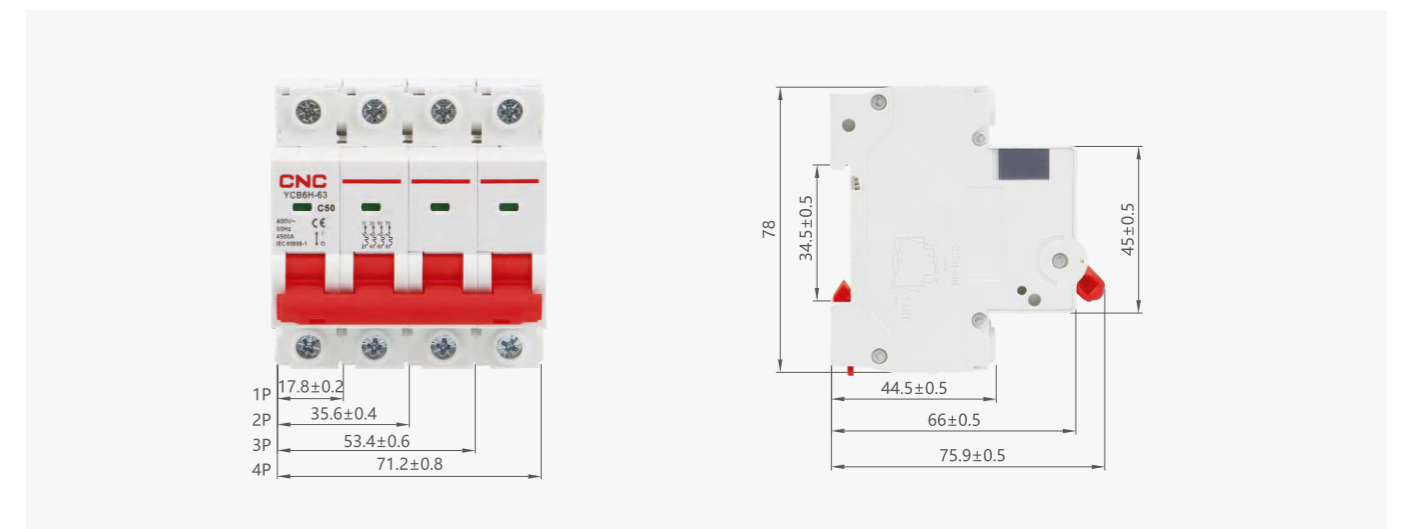



## Modular DIN Rail


### YCB6 Series MCB Accessories

#### General

This series circuit breaker accessories are used in household, building and other electrical circuits with YCB6 circuit breaker cooperated for remote control and different accessories selected for different needs, featured with auxiliary signal, opening and closing status indication, and even alarm signal function for better protection on the circuit, personal and property safety.

Standard: IEC60947-5-1

#### Type designation

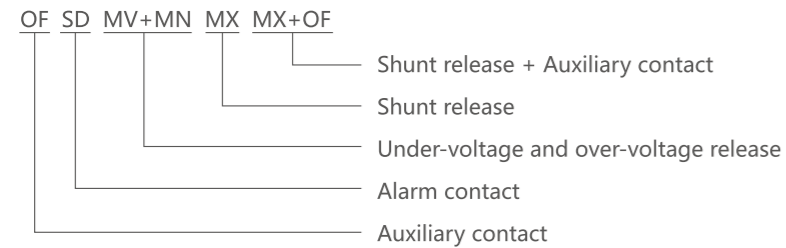


#### Function

Accessory name	Code	Function
Auxiliary contact	OF	Provide auxiliary signal and control auxiliary circuit
Alarm contact	SD	When the circuit breaker is due to a fault, the alarm signal would work and indicate.
Shunt release	MX	Over the range of 70% ~ 110% of the rated control supply voltage, the release should trip the circuit breaker to protect the circuit.
Shunt release + Auxiliary contact	MX+OF	Remote control of circuit and control the auxiliary circuit by auxiliary contact.
Over-voltage and under-voltage release	MV+MN	When the rated voltage 230V increase to 270V+/-5% or reduce to 170V+/-5%, the circuit breaker should trip for over-voltage and under-voltage protection.

#### Installation

All the electrical accessories should be installed at the side of the circuit breaker, details are shown in the figure below. (Remark: each MCB can be installed with 3 (MAX.)indicating accessories.)

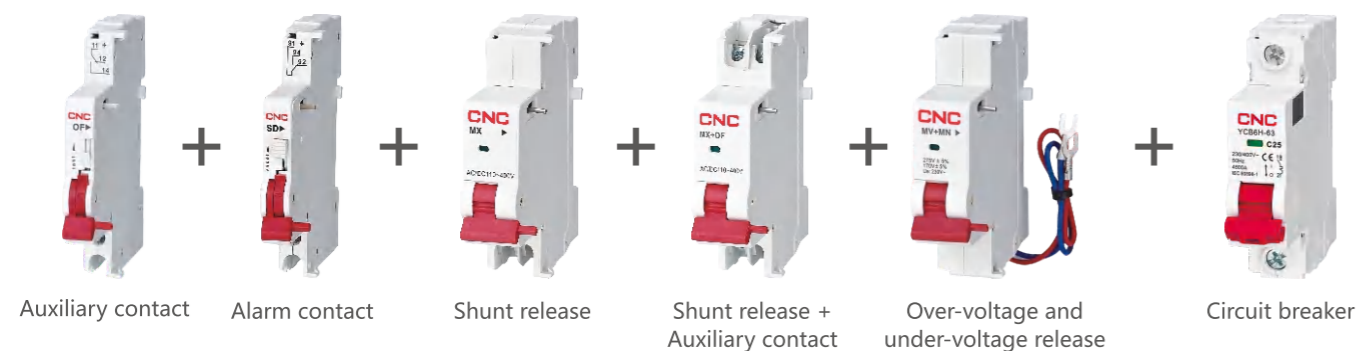

#### Operating Conditions

- Ambient temperature: -5°C~+40°C;
- Altitude: Below 2000m;
- Environment: The medium should be no risk of blasting and can't corrode the metal and damage insulating gas as well as conductive dust;
- Installation: 35mm standard din rail.

## Modular DIN Rail

### YCB6 Series MCB Accessories

#### Technical data

Auxiliary contact and Alarm contact technical parameters

Accessory name	Rated current(A)			Number of contacts	Diagram
	AC 380V	AC 220V	AC 110V		
Auxiliary contact OF	3	6	1	1NO 1NC	
Alarm contact SD	3	6	1	1NO 1NC	

Shunt release, Shunt release + Auxiliary contact technical parameters


Accessory name	Rated insulation voltage Ui	Rated control voltage Us	Tripping power consumption (W or VA)	Operation voltage Us	Diagram
Shunt release MX	415V	AC/DC: 220~380V 110~220V	240	0.7~1.1	
		AC/DC: 24~48V	120		
Shunt release + Auxiliary contact MX+OF	415V	AC/DC: 220~380V 110~220V	240	0.7~1.1	
		AC/DC: 24~48V	120		

Under-voltage & Over-voltage Release technical parameters

Accessory name	Rated working voltage Ue	Trip voltage	Diagram
Over-voltage and under-voltage release MV+MN	AC230V	Under-voltage: 170V±5% Over-voltage: 270V±5%	
	AC380V	Under-voltage: 300V±5% Over-voltage: 460V±5%	

## Modular DIN Rail

### YCB6HLN-63 RCBO Electronic

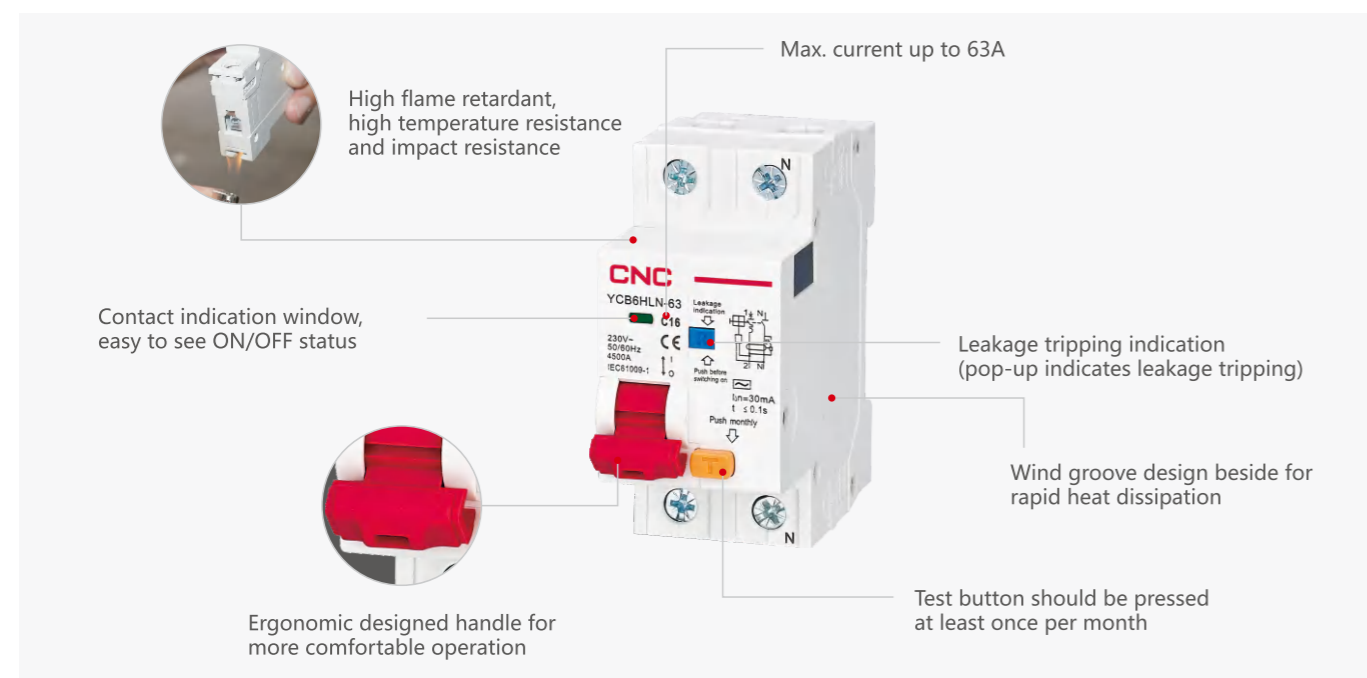


#### General

1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows : type B(3-5)I<sub>n</sub>, type C(5-10)I<sub>n</sub>, type D(10-20)I<sub>n</sub>

#### Selection

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	Tripping
B,C,D	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

#### Curve

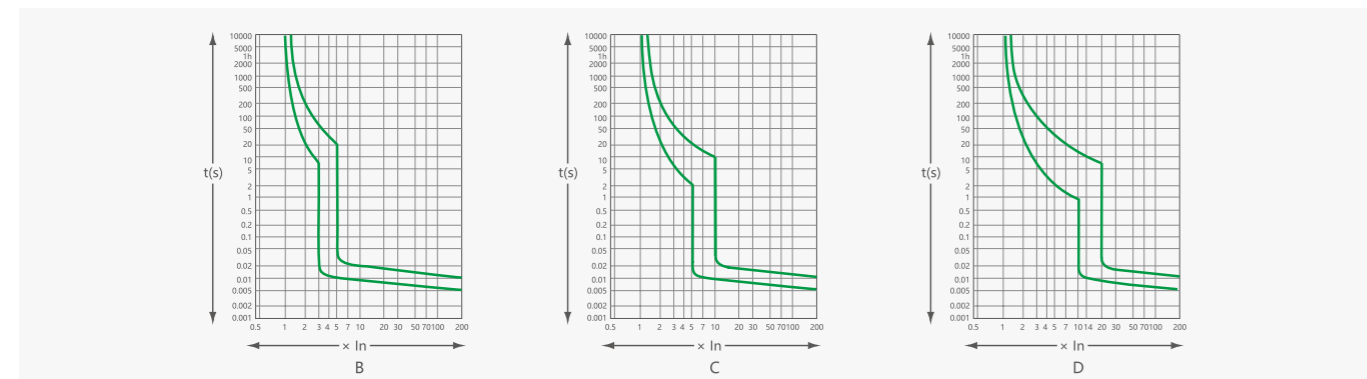


## Modular DIN Rail

### YCB6HLN-63 RCBO Electronic

#### Technical data


Type	Standard		IEC/EN 61009-1
Electrical features	Poles	P	1P+N
	Type(wave form of the earth leakage sensed)		AC
	Thermo-magnetic release characteristic		B, C, D
	Rated current I <sub>n</sub>	A	6, 10, 16, 20, 25, 32, 40, 50, 63
	Rated voltage U <sub>e</sub>	V	230
	Rated sensitivity ΔI <sub>n</sub>	A	0.03, 0.05, 0.1
	Rated residual making and breaking capacity IΔm	A	500(I <sub>n</sub> ≤ 40A) 630(I <sub>n</sub> > 40A)
	Rated short-circuit capacity I <sub>cn</sub>	A	4500
	Break time under IΔn	s	≤ 0.1
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4000
	Dielectric test voltage at ind.Freq.for 1min	kV	2
	Insulation voltage U <sub>i</sub>	V	500
Pollution degree		2	
Mechanical features	Electrical life	t	4000
	Mechanical life	t	10000
	Contact position indicator		Yes
	Protection degree		IP20
	Ambient temperature(with daily average ≤ 35°C)	°C	-5 ~ +40
	Storage temperature	°C	-25 ~ +70
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>	25
		AWG	18-3
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25
		AWG	18-3
	Tightening torque	N*m	2
		l <sub>n</sub> -lbs	18
	Mounting		On DIN rail EN60715(35mm)by means of fast clip device
Connection		From top	

#### Overall and mounting dimensions(mm)

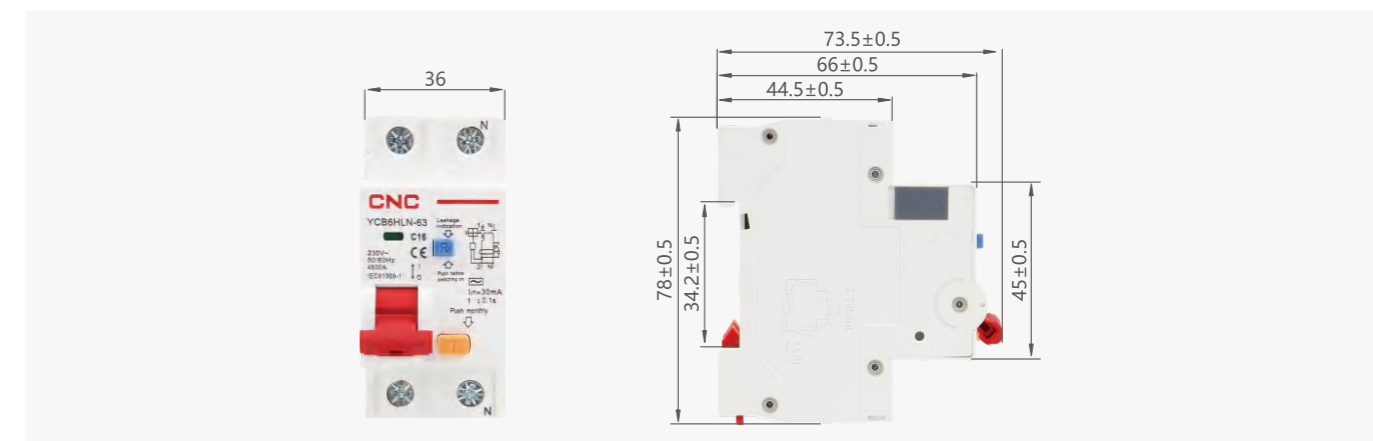

## Modular DIN Rail

### YCB6HLE-63 RCBO Electronic

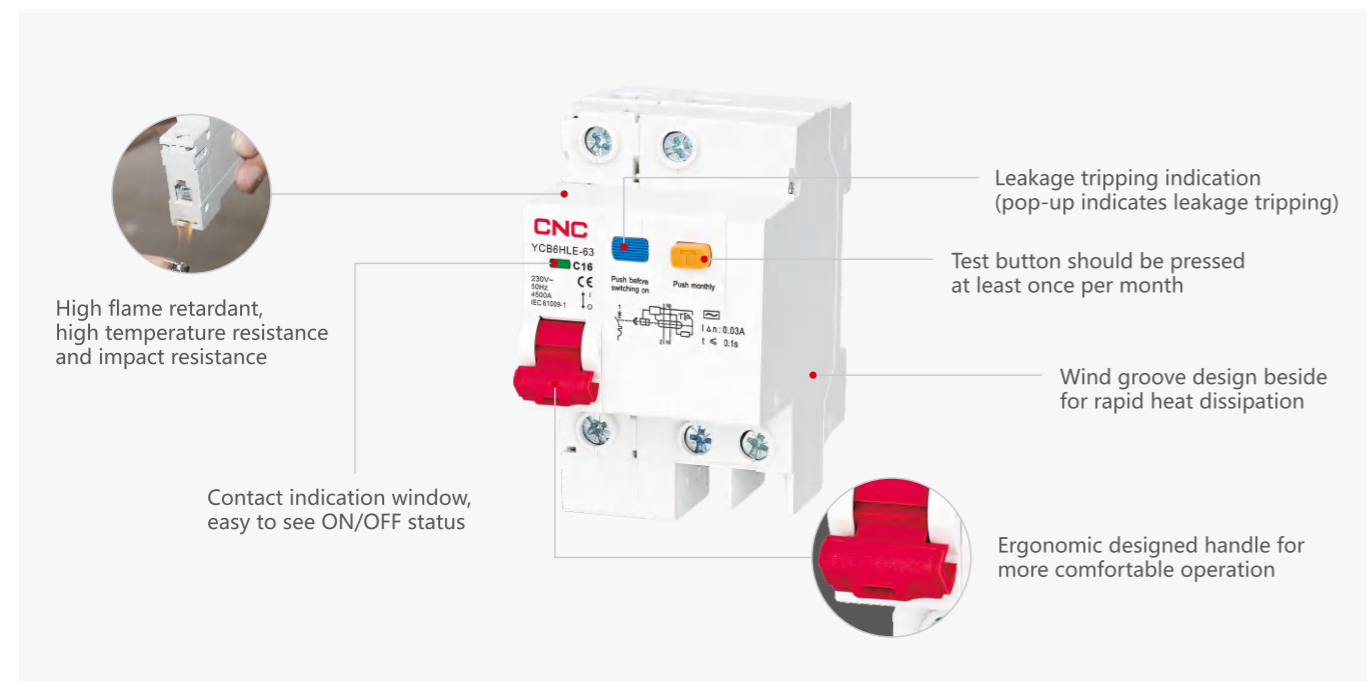


#### General

1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows : type B(3-5)I<sub>n</sub>, type C(5-10)I<sub>n</sub>, type D(10-20)I<sub>n</sub>

#### Selection

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	Tripping
B,C,D	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

#### Curve

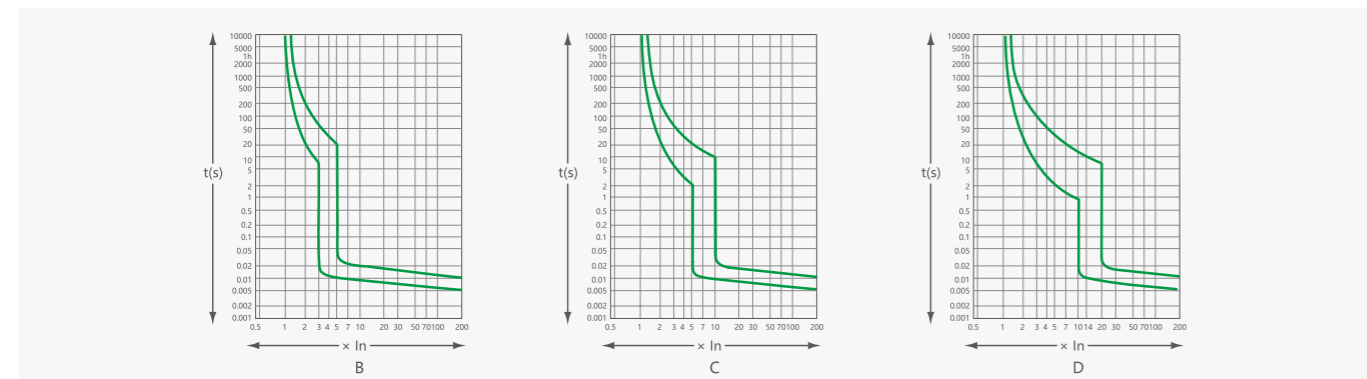


## Modular DIN Rail

### YCB6HLE-63 RCBO Electronic

#### Technical data


Type	Standard		IEC/EN 61009-1
Electrical features	Poles	P	1P+N, 2, 3, 3P+N, 4
	Type(wave form of the earth leakage sensed)		AC
	Thermo-magnetic release characteristic		B, C, D
	Rated current I <sub>n</sub>	A	6, 10, 16, 20, 25, 32, 40, 50, 63
	Rated voltage U <sub>e</sub>	V	230V AC(1P+N, 2P) 400V AC(3P, 3P+N, 4P)
	Rated sensitivity IΔn	A	0.03, 0.05, 0.1, 0.3
	Rated residual making and breaking capacity IΔm	A	500(I <sub>n</sub> ≤ 40A) 630(I <sub>n</sub> > 40A)
	Rated short-circuit capacity I <sub>cn</sub>	A	4500
	Break time under IΔn	s	≤ 0.1
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4000
	Dielectric test voltage at ind.Freq.for 1min	kV	2
	Insulation voltage U <sub>i</sub>	V	500
Pollution degree		2	
Mechanical features	Electrical life	t	4000
	Mechanical life	t	10000
	Contact position indicator		Yes
	Protection degree		IP20
	Ambient temperature(with daily average ≤ 35°C)	°C	-5 ~ +40
Storage temperature	°C	-25 ~ +70	
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>	25
		AWG	18-3
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25
		AWG	18-3
	Tightening torque	N*m	2
		ln-lbs	18
Mounting		On DIN rail EN60715(35mm)by means of fast clip device	
Connection		From top	

#### Overall and mounting dimensions(mm)

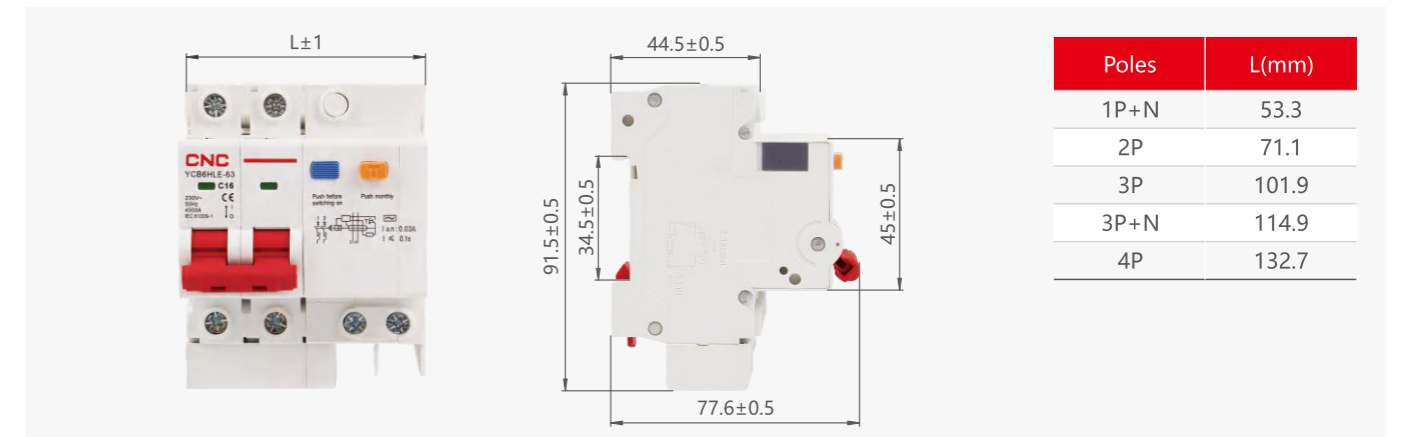



**Modular DIN Rail**  
**YCB6N-32 MCB DPN**

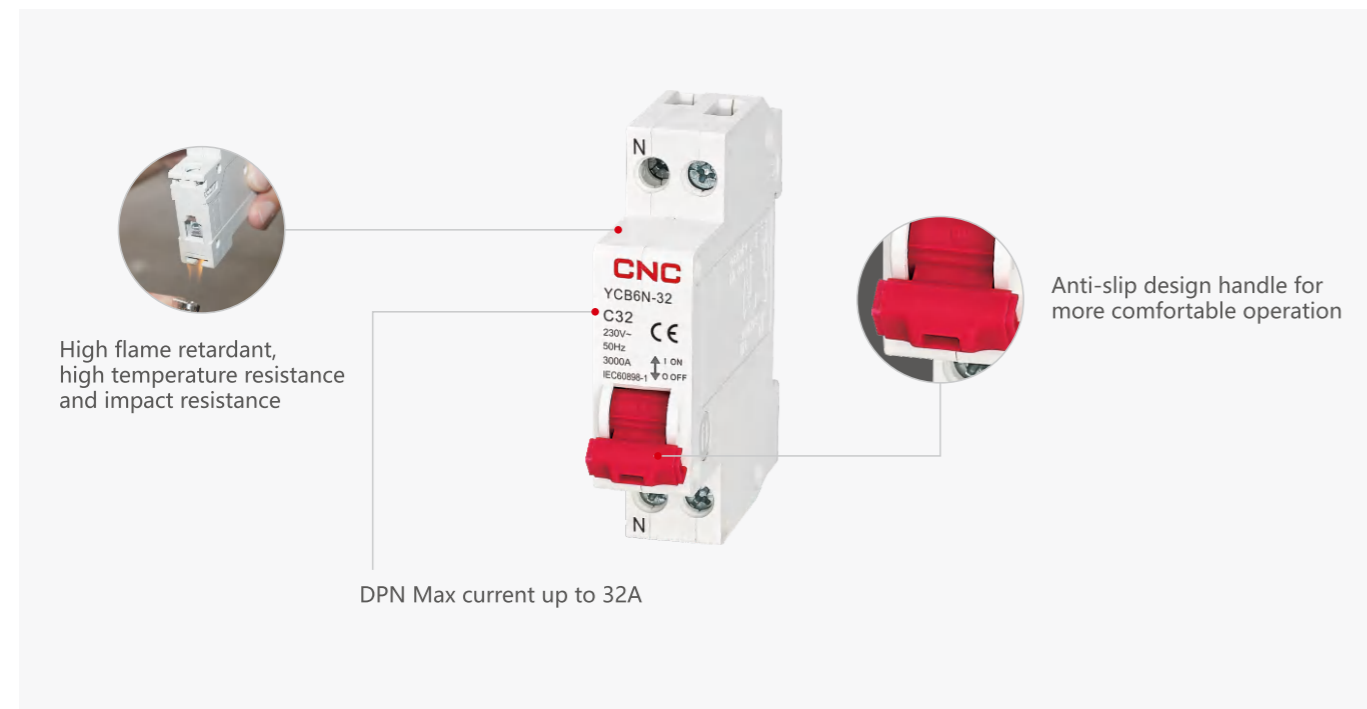


**General**

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure.
5. According to the type of instantaneous release classified as follows : type B(3-5)I<sub>n</sub>, type C(5-10)I<sub>n</sub>

**Selection**

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)					
B,C	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping	C	5I <sub>n</sub>	t ≤ 0.1s	Tripping
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)					
B,C	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping	B	5I <sub>n</sub>	t < 0.1s	Tripping
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)					
				C	10I <sub>n</sub>	t < 0.1s	

**Curve**

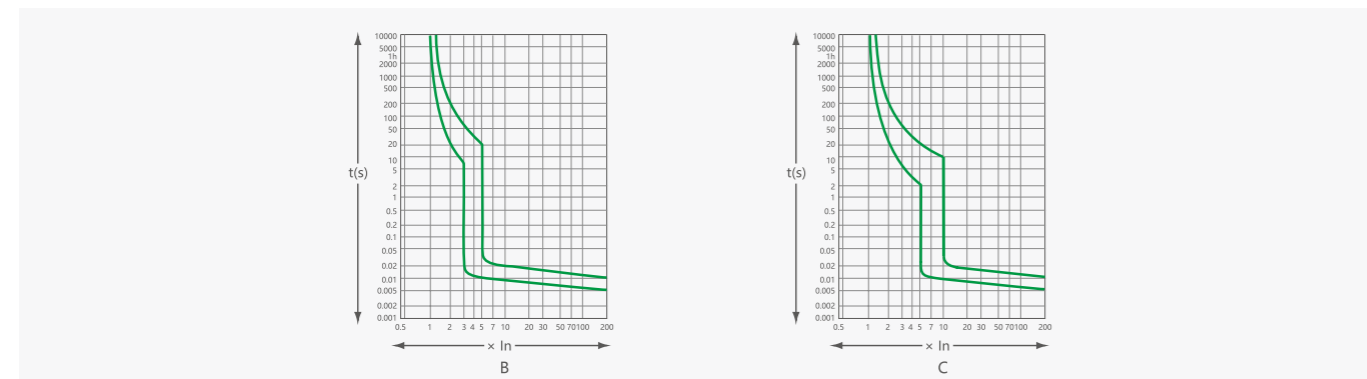


**Modular DIN Rail**  
**YCB6N-32 MCB DPN**


**Technical data**

Type	Standard	IEC/EN 60898-1		
Electrical features	Rated current I <sub>n</sub>	A	6, 10, 16, 20, 25, 32	
	Poles	P	1P+N	
	Rated voltage U <sub>e</sub>	V	230	
	Insulation voltage U <sub>i</sub>	V	500	
	Rated frequency	Hz	50/60	
	Rated breaking capacity	A	3000	
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4000	
	Dielectric test voltage at ind. Freq. for 1min	kV	2	
	Pollution degree		2	
	Thermo-magnetic release characteristic		B, C	
Mechanical features	Electrical life	t	4000	
	Mechanical life	t	10000	
	Protection degree		IP20	
	Reference temperature for setting of thermal element	°C	30	
	Ambient temperature (with daily average ≤ 35°C)	°C	-5 ~ +40	
	Storage temperature	°C	-25 ~ +70	
	Terminal connection type		Cable/Pin-type busbar	
	Installation	Terminal size top / bottom for cable	mm <sup>2</sup>	16
			AWG	18-5
		Terminal size top / bottom for busbar	mm <sup>2</sup>	10
AWG			18-5	
Tightening torque	N*m	2		
	In-lbs	18		
Mounting		On DIN rail EN 60715(35mm) by means of fast clip device		
Connection		From top or bottom		

**Overall and mounting dimensions(mm)**

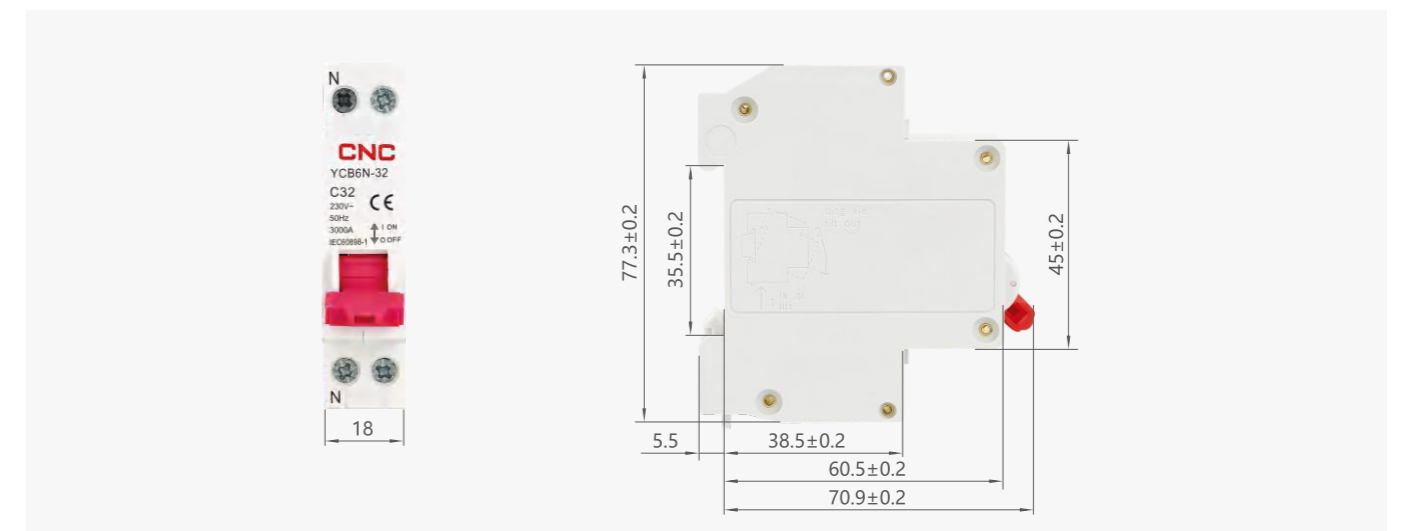


**Modular DIN Rail**  
**YCB1-125 MCB**

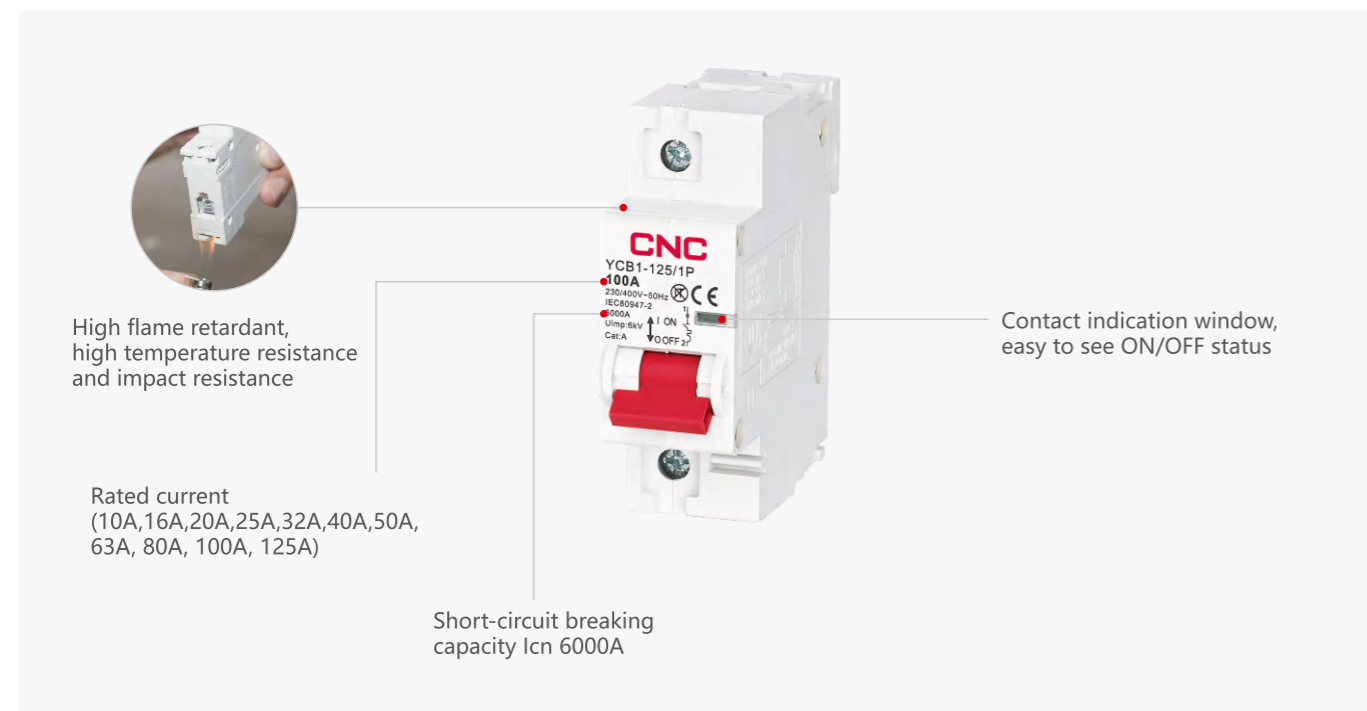

**General**

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure

**Curve**

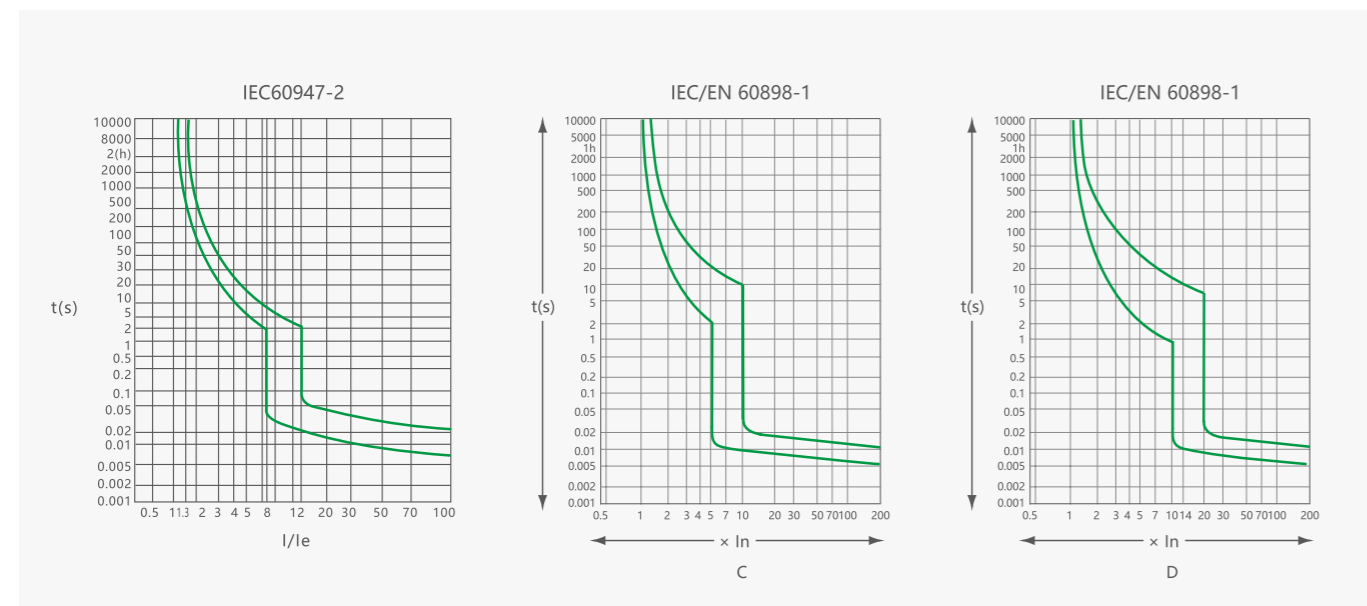


**Modular DIN Rail**  
**YCB1-125 MCB**


**Technical data**

Type	Standard		IEC/EN 60947-2	IEC/EN 60898-1
Electrical features	Rated current In	A	16,20,25,32,40,50,63, 80, 100, 125	
	Poles	P	1, 2, 3, 4	
	Rated voltage Ue	V	230/400	
	Insulation voltage Ui	V	500	
	Rated frequency	Hz	50/60	
	Rated breaking capacity	A	6000	
	Rated impulse withstand voltage(1.2/50) Uimp	V	6000	
	Dielectric test voltage at ind. Freq. for 1min	kV	2.5	
	Pollution degree		3	
	Thermo-magnetic release characteristic		8-12In	C,D
Mechanical features	Electrical life	t	1500	
	Mechanical life	t	10000	
	Contact position indicator		Yes	
	Protection degree		IP20	
	Reference temperature for setting of thermal element		30	
	Ambient temperature (with daily average ≤35°C)	°C	-5~+40(Special application please refer to temperature compensation correction)	
	Storage temperature	°C	-25~+70	
Installation	Terminal connection type	°C	Cable/Pin-type busbar	
	Terminal size top / bottom for cable	mm <sup>2</sup>	50	
		AWG	18-1/0	
	Terminal size top / bottom for busbar	mm <sup>2</sup>	50	
		AWG	18-1/0	
	Tightening torque	N*m	3.5	
		In-lbs	31	
Mounting		On DIN rail EN60715(35mm)by means of fast clip device		
Connection		From top or bottom		

**Overall and mounting dimensions(mm)**

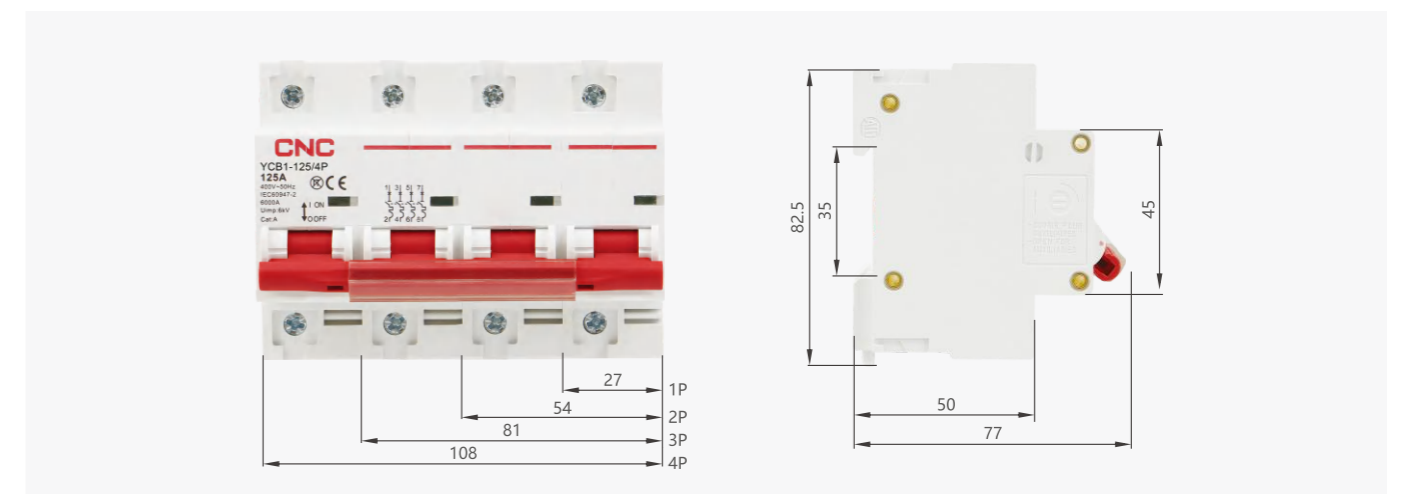

## YCB1LE-125 RCBO Electronic

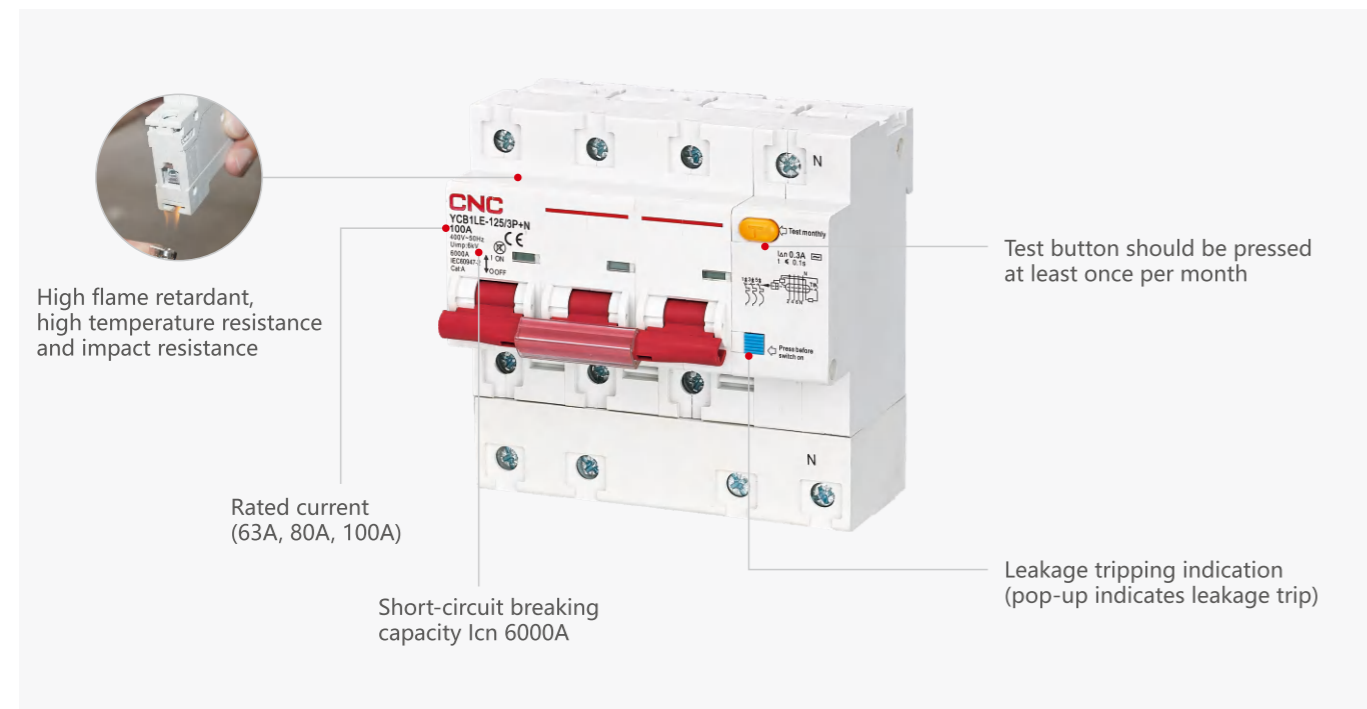


### General

1. Personnel and fire protection
2. Cable and line protection against overload and short-circuits

### Selection

1.  $I\Delta n \leq 30$  mA: additional protection in the case of direct contact.
2.  $I\Delta n \leq 300$  mA: preventative fire protection in the case of ground fault currents.
3. AC class – tripping operation is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.

### Curve

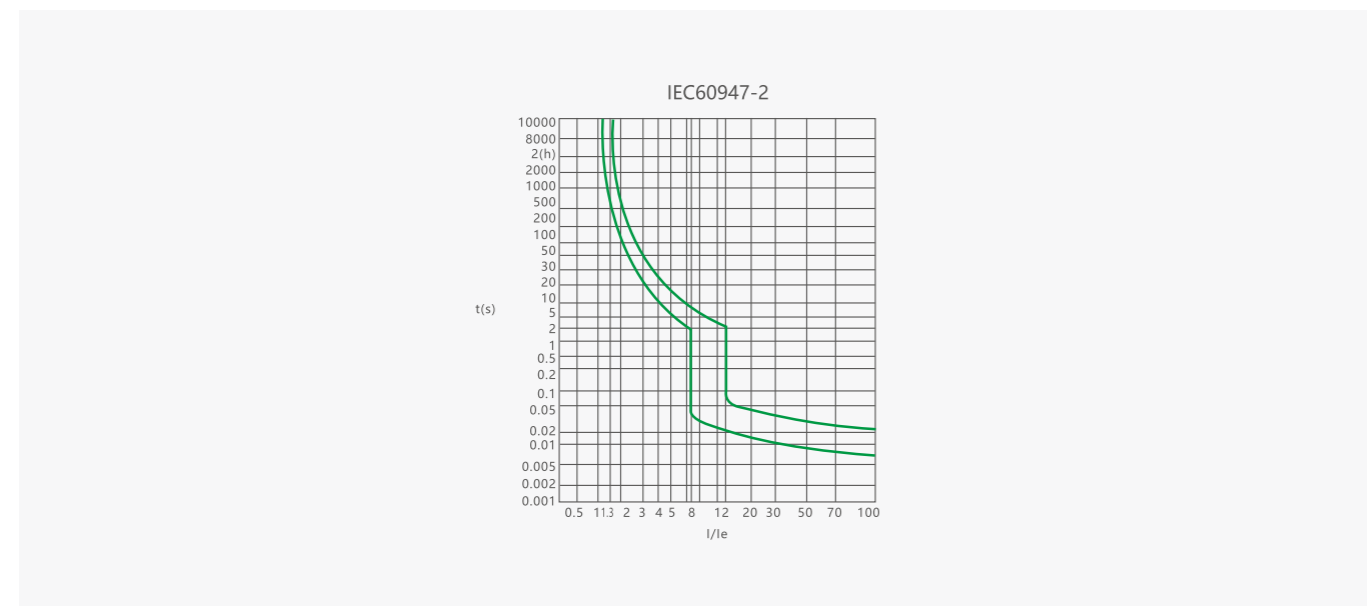


## YCB1LE-125 RCBO Electronic

### Technical data

Type	Standard	IEC/EN 60947-2	
Electrical features	Type (wave form of the earth leakage sensed)	AC	
	Thermo-magnetic release characteristic	8-12In	
	Rated current In	A 63, 80, 100	
	Poles	1P+N, 2P, 3P, 3P+N, 4P	
	Rated voltage Ue	V 230/400	
	Rated sensitivity IΔn	A 0.03, 0.1, 0.3	
	Rated short-circuit capacity Icn	A 6000	
	Break time below IΔn	s ≤0.1	
	Rated impulse withstand voltage (1.2/50)Uimp	V 4000	
	Dielectric TEST voltage at ind. Freq. for 1min	kV 1.89	
Insulation voltage Ui	V 500		
Pollution degree	3		
Mechanical features	Electrical life	1500	
	Mechanical life	8500	
	Contact position indicator	Yes	
	Protection degree	IP20	
	Ambient temperature(with daily average ≤35°C)	°C -5...+40	
	Storage temperature	°C -25...+70	
Installation	Terminal connection type	Cable/Pin-type busbar	
	Terminal size top/bottom for cable	mm <sup>2</sup>	16~50
		AWG	6-1/0
	Terminal size top/bottom for busbar	mm <sup>2</sup>	16~35
		AWG	6-2
	Tightening torque	N*m	3.5
In-lbs.		31	
Mounting Connection		On DIN rail EN 60715 (35mm) by means of fast clip deviceFrom top	


### Overall and mounting dimensions(mm)

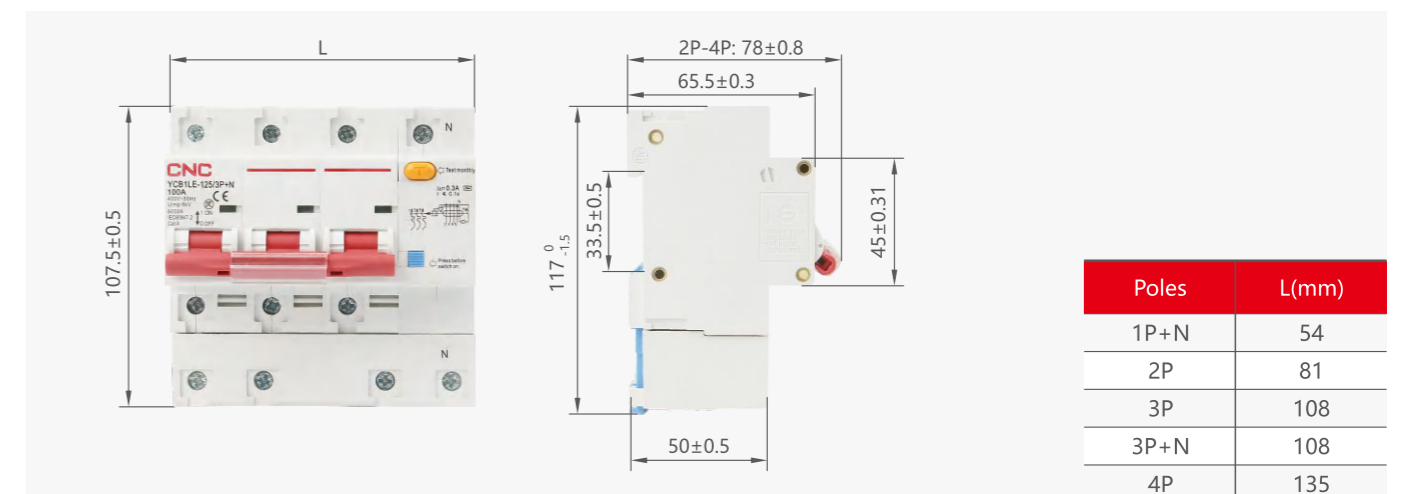



## Modular DIN Rail

### YCH6Z-125 Isolating Switch

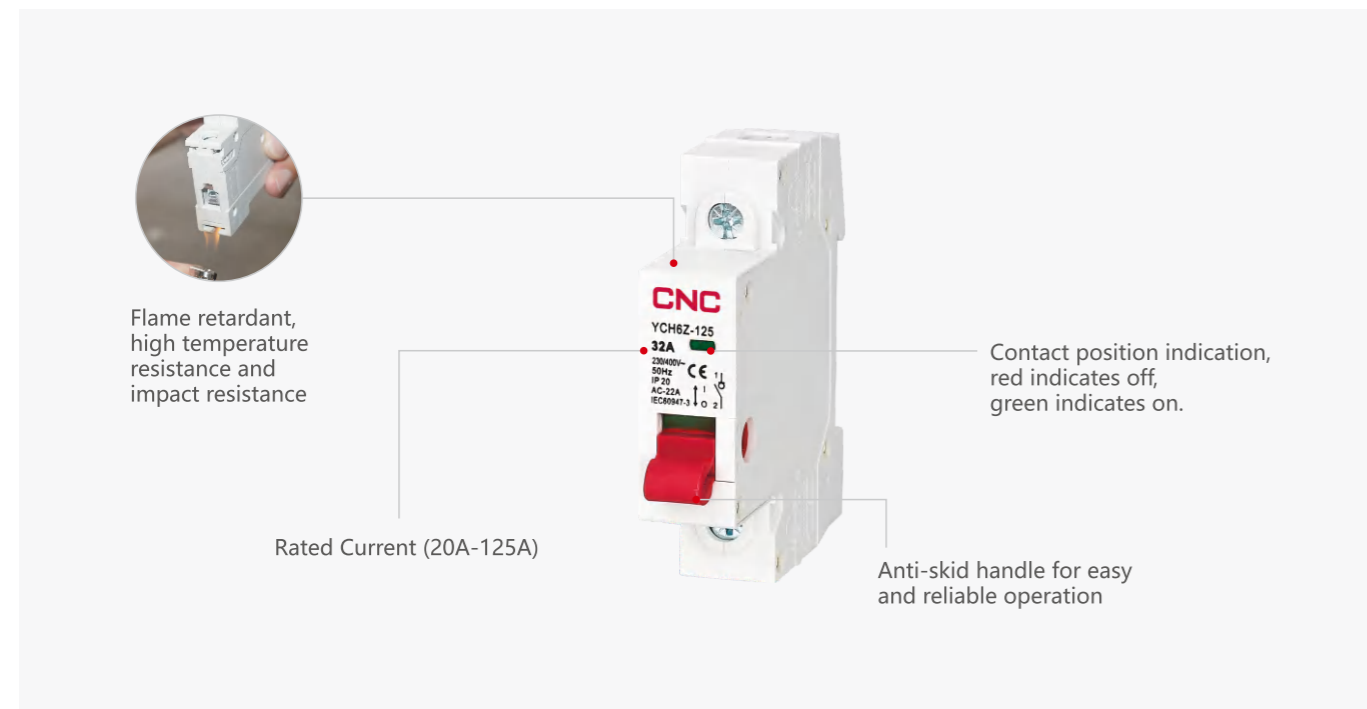

#### General

YCH6Z-125 series isolating switch is suitable for the resistive circuit of AC 50/60HZ, rated voltage 230/400V, rated current up to 125A. It's mainly used for circuit's turning on or off in non-load ed situation. And it functions on connection and isolation between lines and power, especially suitable to isolate power effectively and prevent circuit breaker from closing accidentally when maintaining the circuit in order to ensure the safe operation of maintainer.

Standard: IEC600947-3

#### Operating Conditions

1. Ambient Temperature: -25°C~+60°C
2. Altitude: Not higher than 2000m
3. Use Category: AC-22A
4. Installation Method: Embedded vertical standard rail mounting
5. Wiring Method: Clamp connection wire with screw, tightening torque 2.5N.m


## Modular DIN Rail

### YCH6Z-125 Isolating Switch

#### Technical data


Type	Standard		IEC/EN 60947-3
Electrical features	Poles	P	1, 2, 3, 4
	Rated voltage Ue	V	230/400
	Rated current Ie	A	20,32,40,63, 80,100,125
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)Uimp	V	4000
	Rated short-time withstand current Icw		12Ie, 1s
	Rated making and breaking capacity		3Ie, 1.05Ue, cosΦ=0.65
	Rated short circuit making capacity		20Ie, t=0.1s
	Dielectric test voltage at ind.Freq.for 1min	kV	2.5
	Insulation voltage Ui	V	500
Mechanical features	Pollution degree		2
	Electrical life	t	1500
	Mechanical life	t	8500
	Protection degree		IP20
Installation	Terminal size top/bottom for cable and pin-type busbar	mm <sup>2</sup>	50
		AWG	18-1/0

#### Overall and mounting dimensions(mm)

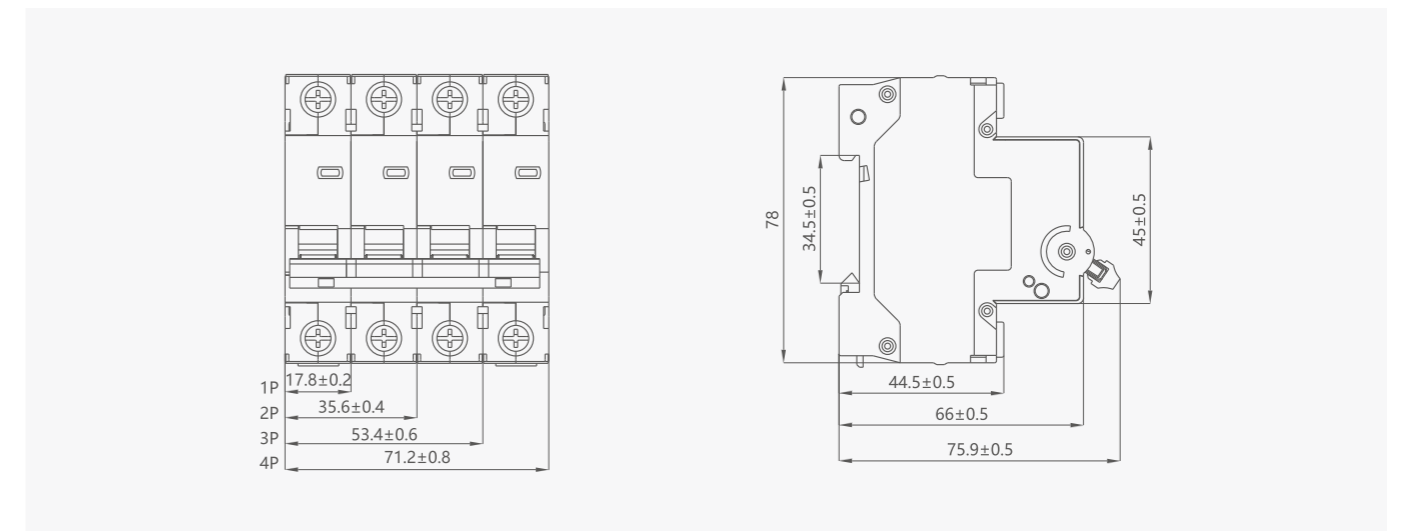

## Modular DIN Rail

### YCB6RL-63 RCCB Electromagnetic

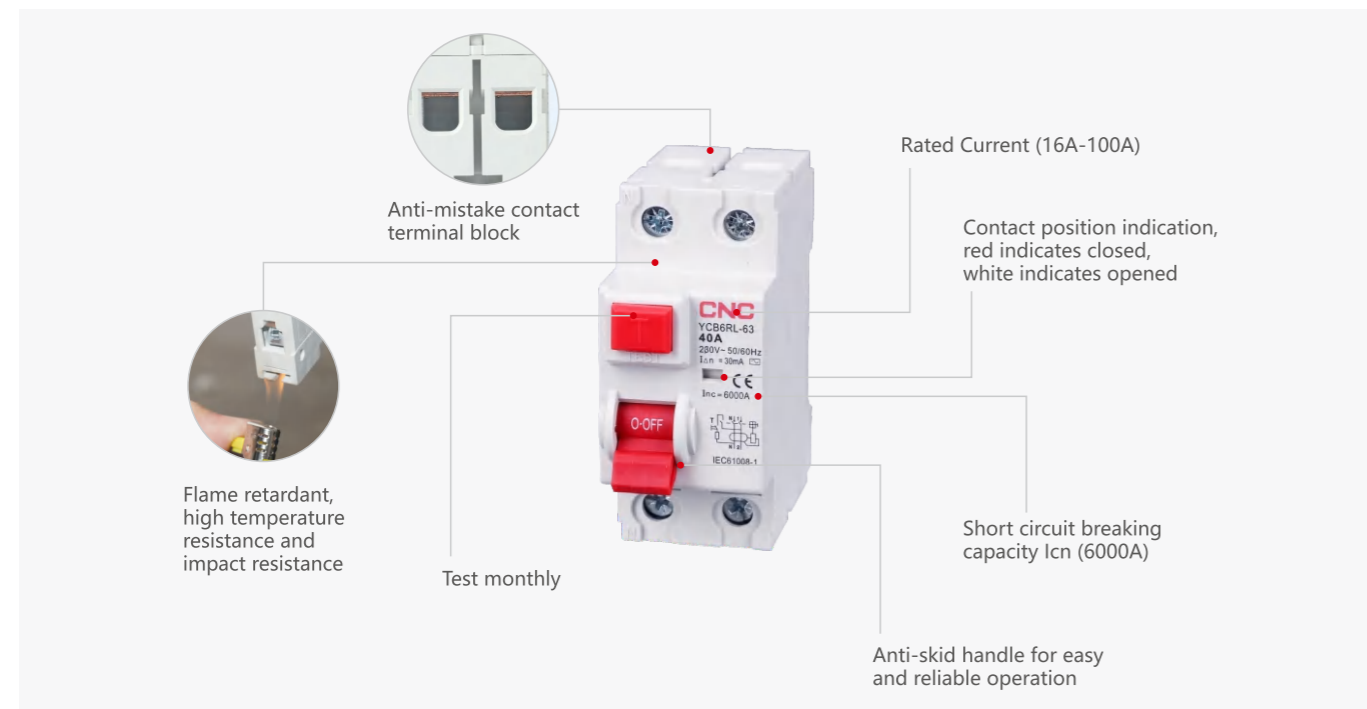


#### General

1. Protection against the effects of sinusoidal alternating earth fault currents
2. Protection against indirect contacts and additional protection against direct contacts
3. Protection against fire hazard caused by insulation faults
4. Controlling and Switching
5. Used in residential building, non-residential building, energy sources, industry and infrastructure

#### Selection

Type		Tripping sensitivity data	
AC	For residual sinusoidal alternating currents	30mA	The personnel, material and fire protection, as well as for protection against direct contact
A	For residual sinusoidal alternating currents and residual pulsating direct currents	100mA	For providing protection against indirect contacts
S	For selectivity, with time delay	300mA	For providing fire protection in case of insulation faults

#### Wiring Diagram

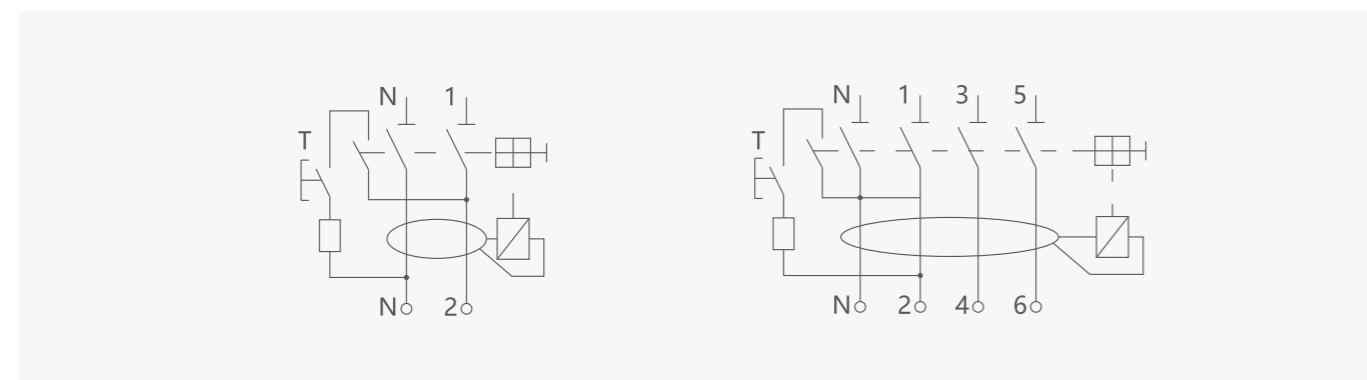


## Modular DIN Rail

### YCB6RL-63 RCCB Electromagnetic

#### Technical data

Type	Standard	IEC/EN 61008-1	
Electrical features	Leakage type	Electromagnetic type	
	Rated current In	A	
	Type (wave form of the earth leakage sensed)	A, AC	
	Poles	1P+N, 3P+N	
	Rated voltage Ue	V	
	Insulation voltage Ui	V	
	Rated frequency	Hz	
	Rated breaking capacity Inc=IΔc	A	
	Rated impulse withstand voltage (1.2/50) Uimp	V	
	Dielectric test voltage at ind. Freq. for 1min	kV	
	Rated sensitivity IΔn	A	
	Rated residual making and breaking capacity IΔm	A	
Mechanical features	Pollution degree	2	
	Electrical life	t	
	Mechanical life	t	
	Protection degree	IP20	
	Storage temperature	°C	
	Ambient temperature (with daily average ≤35°C)	°C	
Installation	Terminal connection type	Cable/Pin-type busbar	
	Terminal size top / bottom for cable	mm <sup>2</sup>	25/35
		AWG	18-3/18-2
	Terminal size top / bottom for busbar	mm <sup>2</sup>	10/16
		AWG	18-8/18-5
	Tightening torque	N*m	2.5
	ln-lbs	22	
Mounting		On DIN rail EN 60715(35mm)by means of fast clip	
Connection		From top and bottom	

#### Overall and mounting dimensions(mm)

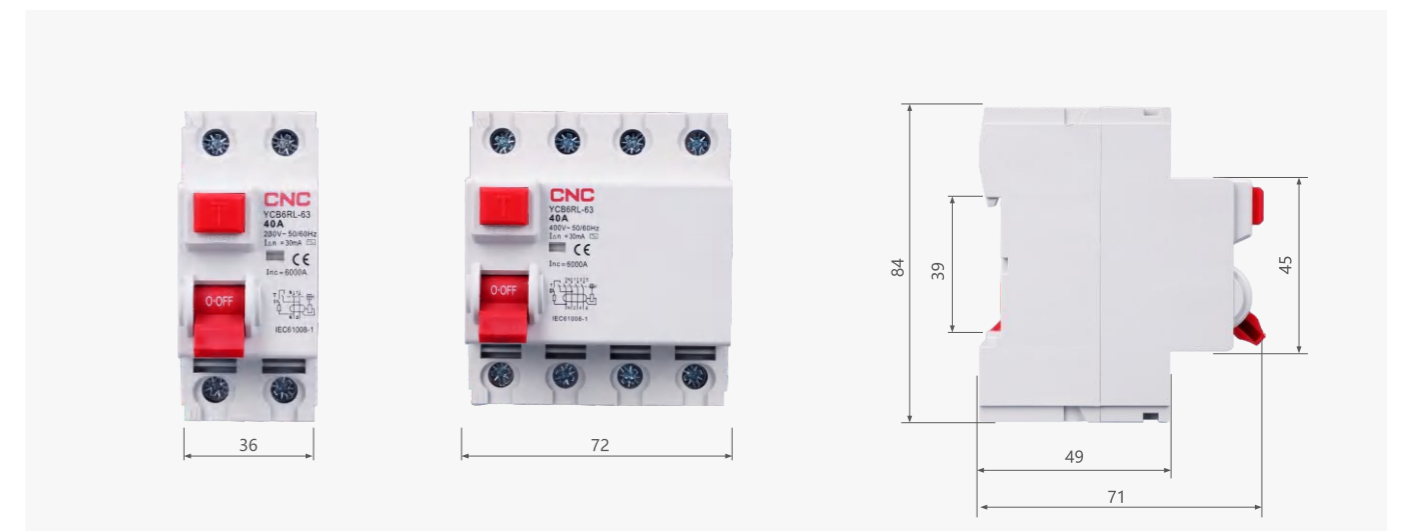


# YCB7 Series

- Industrial aesthetic design
- Higher performance



## YCB7 Series MCB

Overview

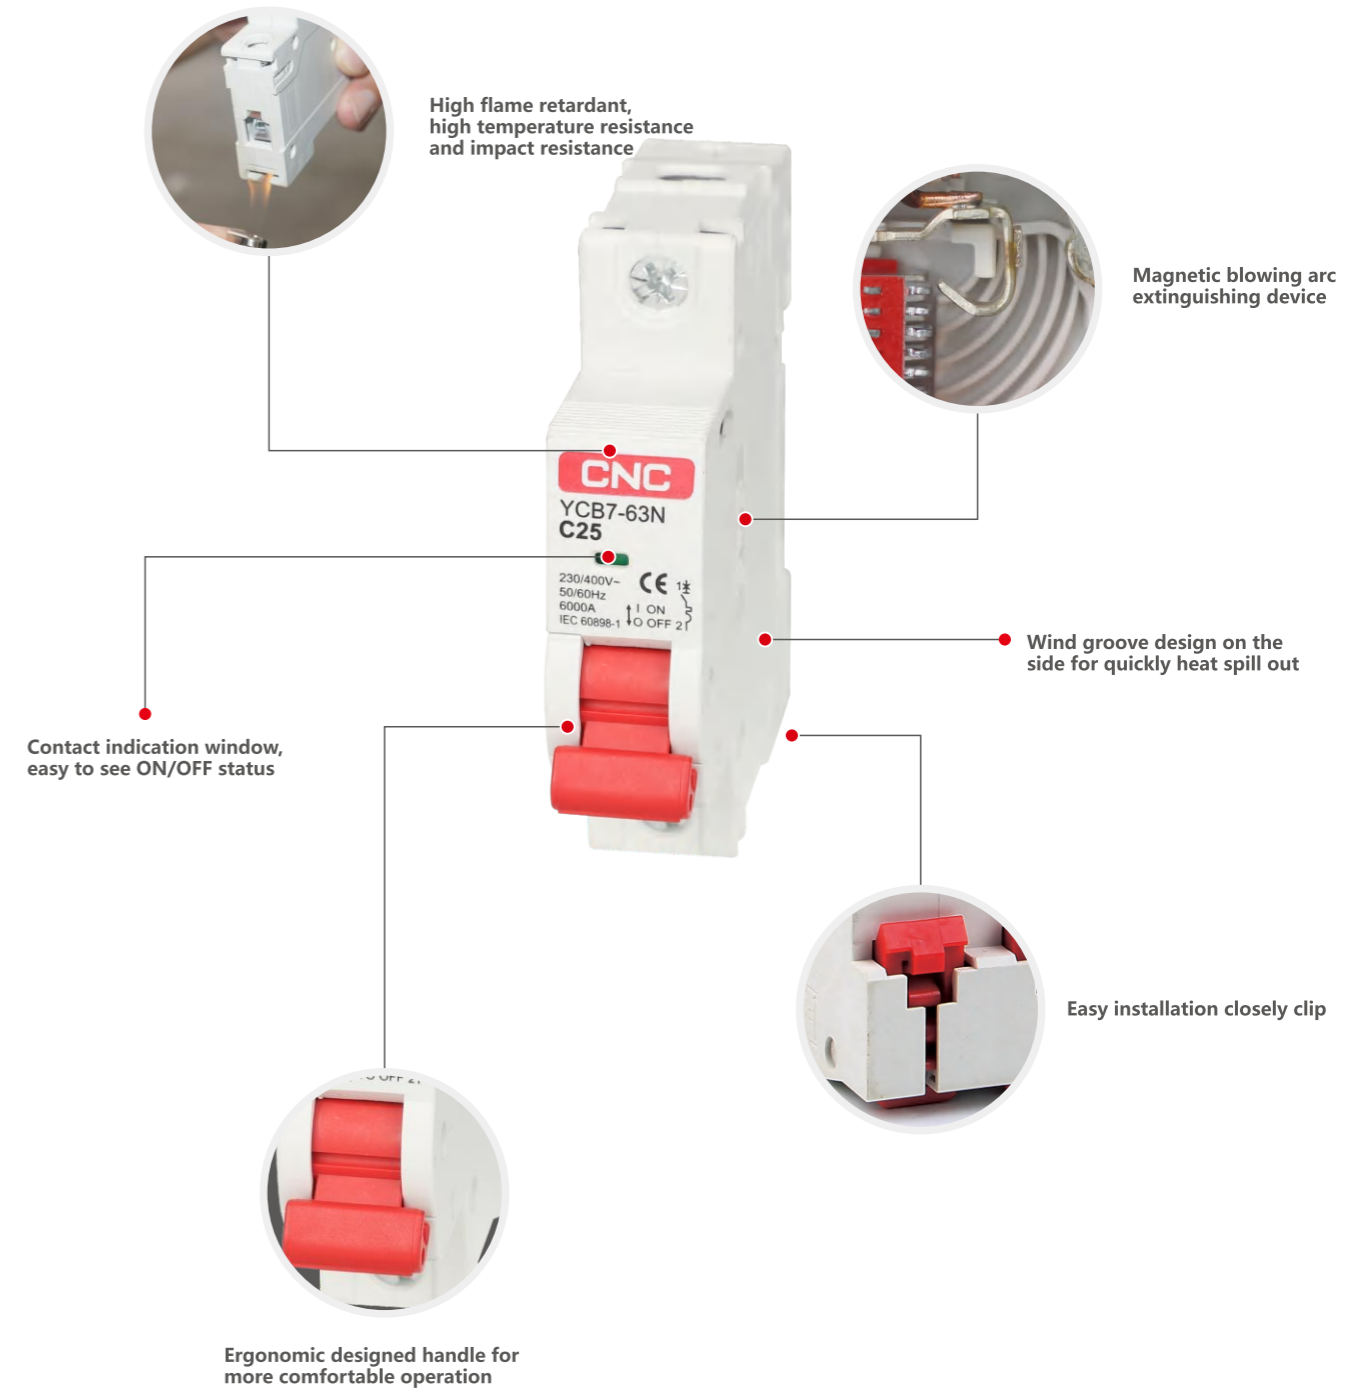



**Modular DIN Rail**  
**YCB7-63N MCB**

A



**General**

The YCB7-63N series miniature circuit breaker are suitable for overcurrent protection building line facilities and similar purposes in AC 50/60Hz, rated voltage 230V/400V, rated current up to 63A circuits. They have isolation, overload, and short circuit protection functions, and can also be used for infrequent operation and switching of lines under normal circumstances. Circuit breakers are suitable for various places such as industry, commerce, high-rise buildings, and residential buildings.  
Standard: IEC/EN 60898-1.

**Selection**

YCB7	63	N	1P	C	16
Model	Shell grade current	Breaking capacity	Number of poles	Tripping characteristics	Rated current
Miniature circuit breaker	63	N:6kA	1P	B C D	1
					2
					4
					6
					10
			2P 3P 4P		16
					20
					25
					32
					40
					50
63					
80					

Note: This product can be assembled with accessories (YCB7-63N OF/SD/OF+SD/MX/MVMN/MX+OF, etc)

**Modular DIN Rail**  
**YCB7-63N MCB**

A

**Technical data**


Type	Standard	IEC/EN 60898-1		
Comprehensive data	Function	Overload, Short circuit, Isolation		
	Number of poles	1P,2P,3P,4P		
	Rated current I <sub>n</sub>	1-63A		
	Rated frequency	50/60Hz		
Electrical features	Rated voltage U <sub>e</sub>	230/400		
	Rated insulation voltage U <sub>i</sub>	500		
	Rated breaking capacity I <sub>cn</sub>	6000		
	Rated impulse withstand voltage U <sub>imp</sub> (1.2/50)	4		
	Pollution degree	2		
	Use category	II, III		
	Trip type	Thermal magnetic release		
	Thermal magnetic tripping characteristics	B,C,D		
	Electrical and mechanical accessories	□		
	Mechanical features	Mechanical life	Times 20000	
Electrical life		Times 10000		
Protection degree		IP20		
Antihumidity and heat resistance		The relative humidity of the air is not more than 50% when the ambient air temperature is +40°C, and it can have a higher relative humidity at a lower temperature		
Reference ambient temperature		°C 30		
Ambient temperature		°C -5°C-+40°C, the average value of 24h does not exceed +35°C		
Height		m Not exceeding 2000		
Installation		Terminal connection type	Cable/Pin-type busbar	
		Maximum wire capacity	Terminal size top/bottom for cable	mm <sup>2</sup> 25
			AWG	18-3
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25	
		AWG	18-3	
	Torque	N*m	2	
		ln-lbs	18	
	Tool	18	Phillips screwdriver or flat-blade screwdriver	
Installation		On DIN rail EN 60715 (35mm) by means of fast clip device		
Wiring method		From top or bottom		

**Modular DIN Rail**  
**YCB7-63N MCB**

**Modular DIN Rail**  
**YCB7LE-63Y RCBO Electronic**

**A**


**Overall and mounting dimensions(mm)**

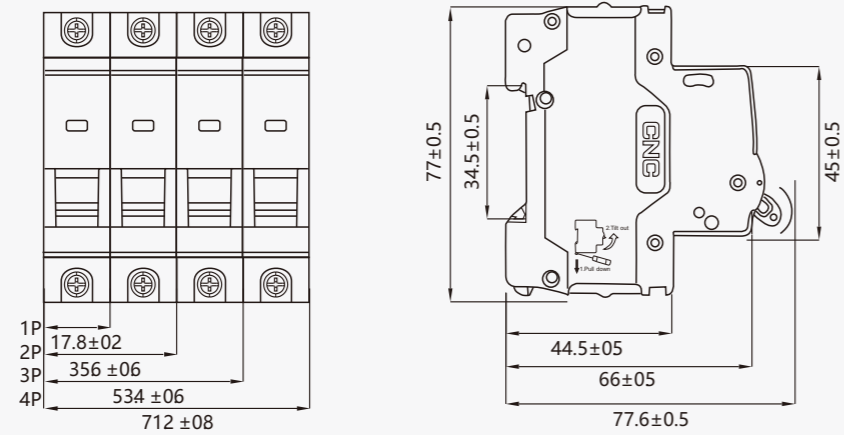

**Selection**

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	Tripping
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	
B,C,D	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	Tripping
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

**Curve**

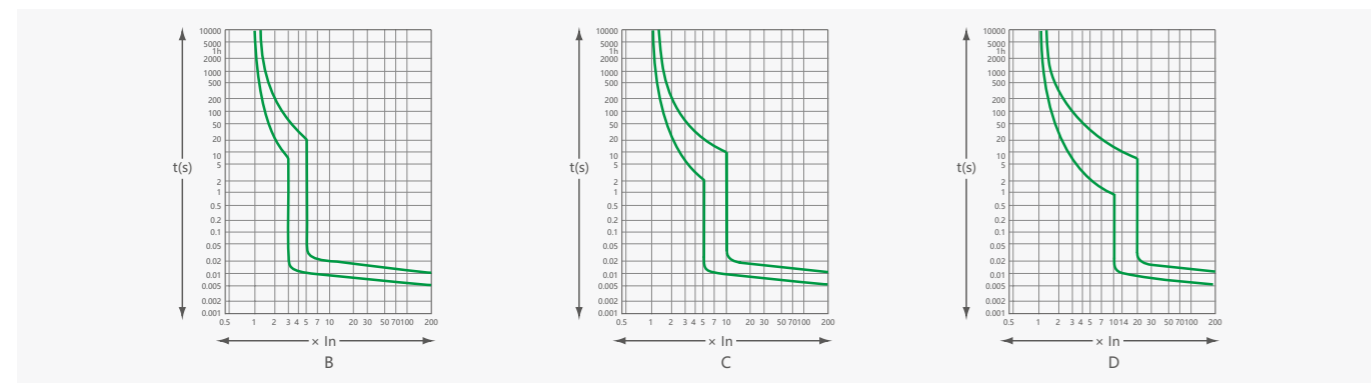

**A**



**General**

YCB7LE-63Y series integrated residual current operated circuit breaker is mainly used in AC 50/60Hz rated voltage 230V rated current up to 63A lines, as a load line for leakage (electric shock), overload and short circuit protection. It can also be used for infrequent connection, disconnection, and switching.  
Standard: IEC/EN 61009-1

**Feature**

- High breaking capacity
- Strong applicability of attachments
- Small volume
- Anti slip design
- Stable and reliable


**Selection**

Model	Shell grade current	Category	Pole	Tripping characteristics	Rated current	Rated residual operating	Type	
YCB7LE	-	63	Y	1P+N	C	63	100mA	A Type
Residual Current Operated Circuit Breaker	-	63	Integrated	1P+N	B C D	6 32 10 40 16 50 20 63 25	Default: 30mA 100mA 300mA	Default: AC Type Type A Type

**Product Accessories**

There are six different accessories in the circuit breaker, including OF auxiliary contact, MX+OF shunt release, SD alarm contact, MV overvoltage release, MN undervoltage release, and MVMN overvoltage and undervoltage release. All accessories are installed on the left side of the product.

**Curve**

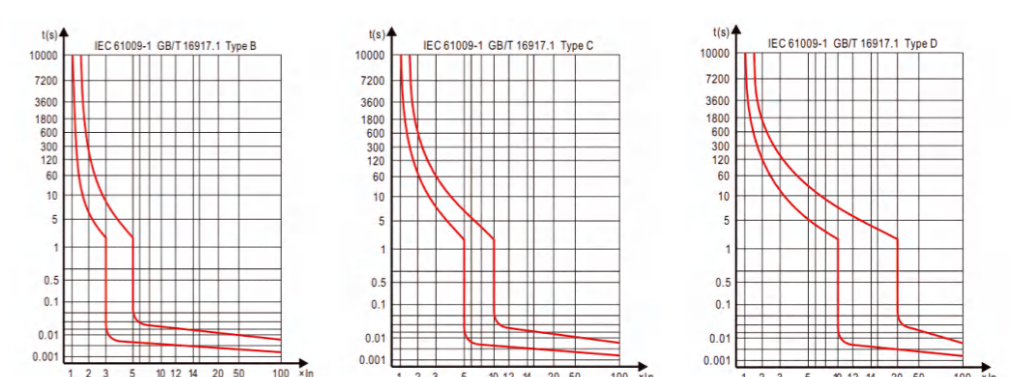


A


Technical data

Model	YCB7LE-63Y		
Electrical features	Poles	P	1P+N
	Type(wave form of the earth leakage sensed)		AC, A
	Thermomagnetic release characteristic		B, C, D
	Rated current $I_n$	A	6, 10, 16, 20, 25, 32, 40, 50, 63
	Rated voltage $U_e$	V	230
	Rated sensitivity $I_{\Delta n}$	A	0.03, 0.1, 0.3
	Rated residual making and breaking capacity $I_{\Delta m}$	A	630
	Rated short-circuit capacity $I_{cn}$	A	6000
	Break time under $I_{\Delta n}$	s	$\leq 0.1$
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage $(1.2/50)U_{imp}$	V	4000
	Dielectric test voltage at ind.Freq.for 1min	Kv	2
	Insulation voltage $U_i$	V	500
	Pollution degree		2
Mechanical features	Electrical life	t	10000
	Mechanical life	t	20000
	Contact position indicator		Yes
	Protection degree	t	IP20
	Ambient temperature(with daily average $\leq 35^\circ\text{C}$ )	$^\circ\text{C}$	-5~+40
	Storage temperature	$^\circ\text{C}$	-25~+70
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>	25
		AWG	18-3
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25
		AWG	18-3
	Tightening torque	N*m	2
		l <sub>n</sub> -lbs	18
Mounting		On DIN rail EN60715(35mm)by means of fast clip device	
Connection		From top	

Overall and mounting dimensions(mm)

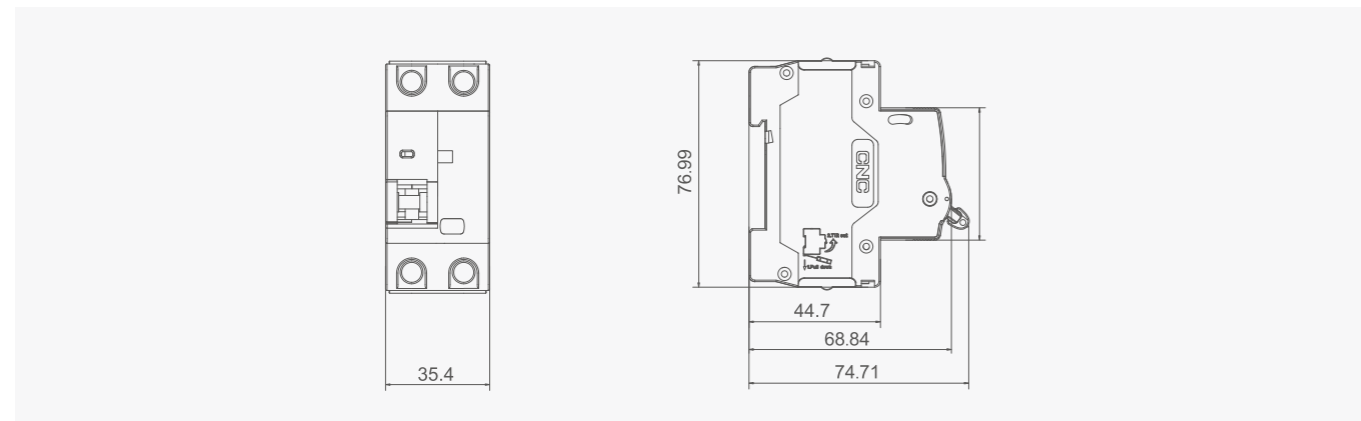

A

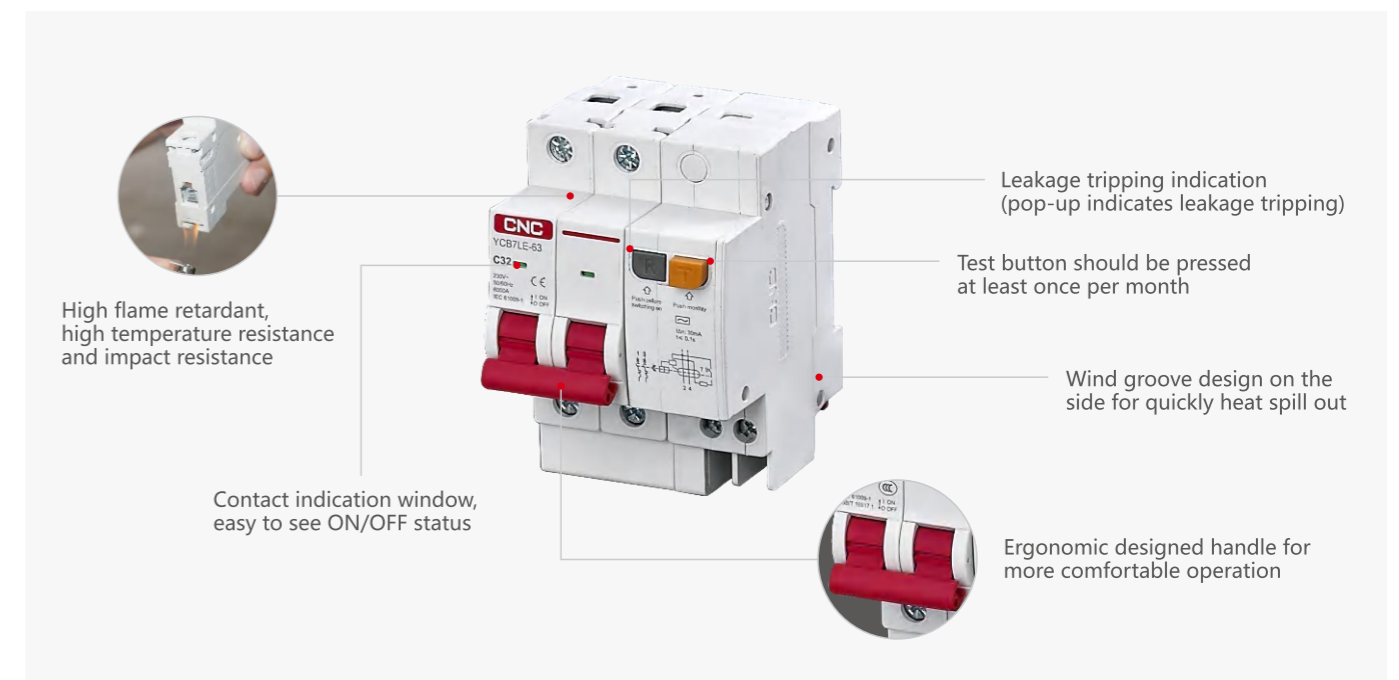


General

1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts.
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows : type B(3-5)I<sub>n</sub>, type C(5-10)I<sub>n</sub>, type D(10-20)I<sub>n</sub>

Selection

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	
B,C,D	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	Tripping
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

Curve

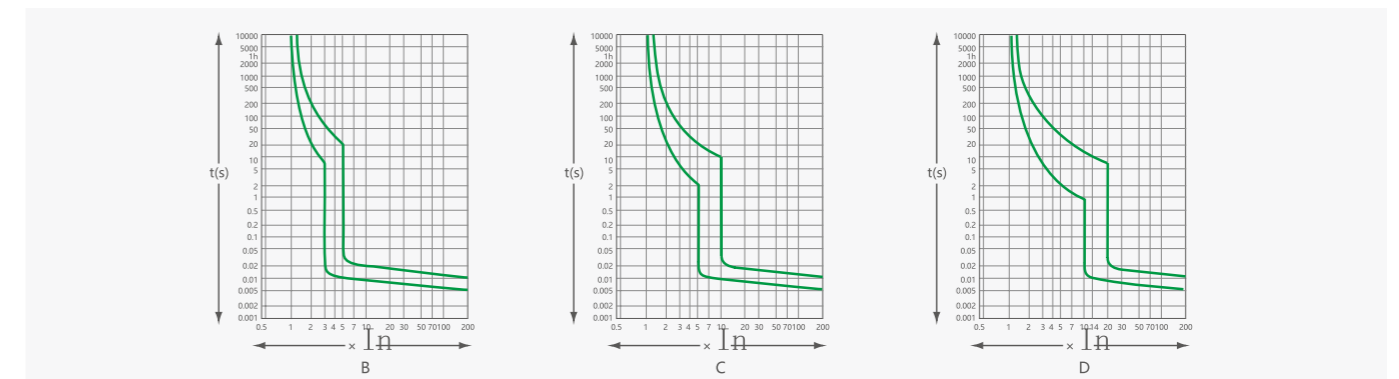


## Modular DIN Rail

### YCB7LE-63 RCBO Electronic

#### Technical data

Type	Standard		IEC/EN 61009-1
Electrical features	Poles	P	1P+N, 2, 3, 3P+N, 4
	Type(wave form of the earth leakage sensed)		AC
	Thermo-magnetic release characteristic		B, C, D
	Rated current I <sub>n</sub>	A	6, 10, 16, 20, 25, 32, 40, 50, 63
	Rated voltage U <sub>e</sub>	V	230V AC(1P+N, 2P) 400V AC(3P, 3P+N, 4P)
	Rated sensitivity I <sub>Δn</sub>	A	0.03, 0.05, 0.1, 0.3
	Rated residual making and breaking capacity I <sub>Δm</sub>	A	500(I <sub>n</sub> ≤40A) 630(I <sub>n</sub> >40A)
	Rated short-circuit capacity I <sub>cn</sub>	A	4500
	Break time under I <sub>Δn</sub>	s	≤0.1
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4000
	Dielectric test voltage at ind.Freq.for 1min	kV	2
	Insulation voltage U <sub>i</sub>	V	500
	Mechanical features	Pollution degree	
Electrical life		t	4000
Mechanical life		t	10000
Contact position indicator			Yes
Protection degree			IP20
Ambient temperature(with daily average≤35°C)		°C	-5~+40
Storage temperature	°C	-25~+70	
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>	25
		AWG	18-3
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25
		AWG	18-3
	Tightening torque	N*m	2
		In-lbs	18
Mounting		On DIN rail EN60715(35mm)by means of fast clip device	
Connection		From top	


#### Overall and mounting dimensions(mm)

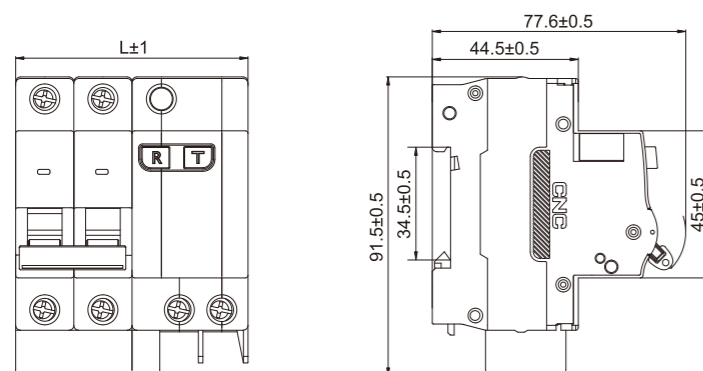

Poles	L(mm)
1P+N	53.3
2P	71.1
3P	101.9
3P+N	114.9
4P	132.7

## Modular DIN Rail

### YCB7-125 MCB

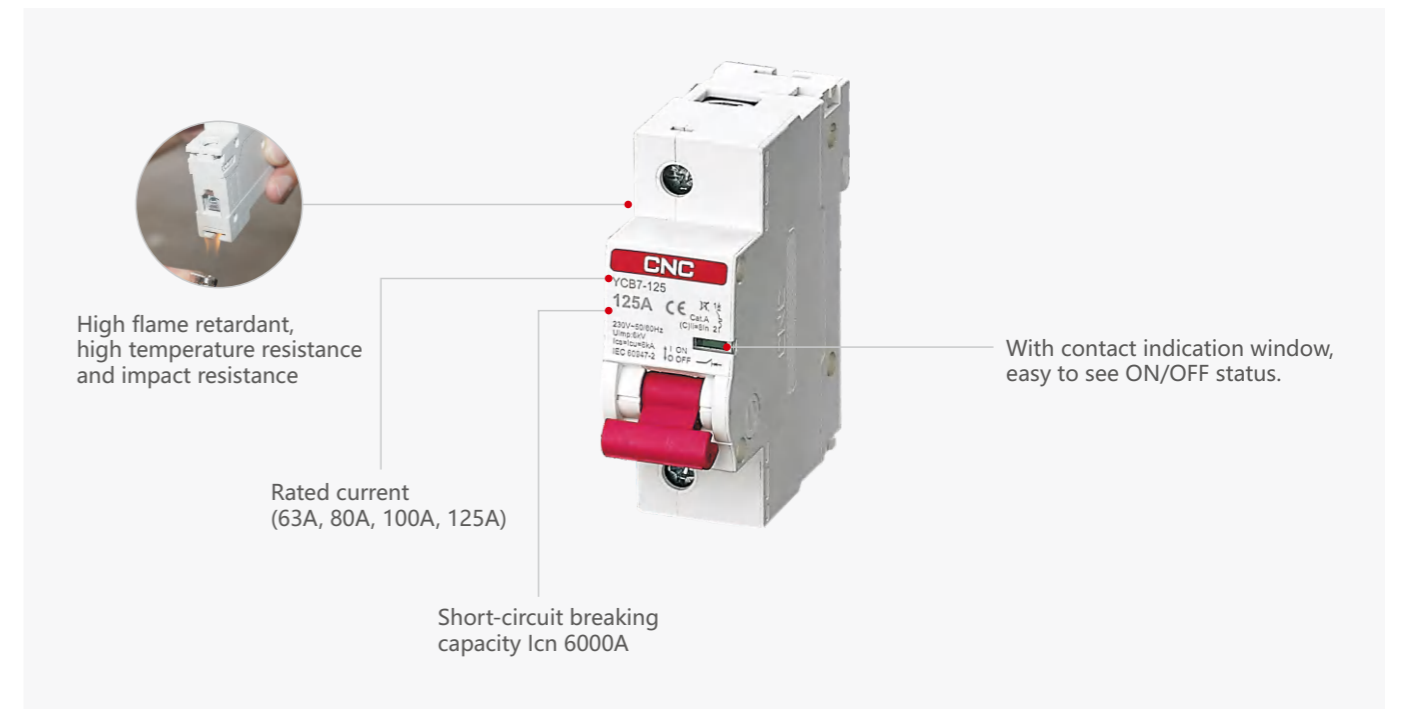

#### General

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure.

#### Release

Type	Test current	Tripping time	Expected result
C,D	1.05I <sub>n</sub>	t≤1h(I <sub>n</sub> ≤63A),t≤2h(I <sub>n</sub> ≤63A)	Not tripping
C,D	1.3I <sub>n</sub>	t≤1h(I <sub>n</sub> ≤63A),t≤2h(I <sub>n</sub> ≤63A)	Tripping
C,D	2.55I <sub>n</sub>	1s<t<60s	Tripping
C	8I <sub>n</sub> ×80%	t≤0.2s	Not tripping
D	12I <sub>n</sub> ×80%	t≤0.2s	Not tripping
C	8I <sub>n</sub> ×120%	t<0.2s	Tripping
D	12I <sub>n</sub> ×120%	t<0.2s	Tripping




**Modular DIN Rail**  
**YCB7-125 MCB**


**Specifications**

Type	Standard		IEC/EN 60947-2
Electrical features	Rated current In	A	63, 80, 100, 125
	Poles	P	1, 2, 3, 4
	Rated voltage Ue	V	230/400
	Insulation voltage Ui	V	500
	Rated frequency	Hz	50/60
	Rated breaking capacity	A	6000
	Rated impulse withstand voltage(1.2/50) Uimp	V	6000
	Dielectric test voltage at ind. Freq. for 1min	kV	2.5
	Pollution degree		3
	Thermo-magnetic release characteristic		(C)Ii=8In,(D)Ii=12In
Mechanical features	Electrical life	t	1500
	Mechanical life	t	10000
	Contact position indicator		Yes
	Protection degree		IP20
	Reference temperature for setting of thermal element		30
	Ambient temperature (with daily average ≤35°C)	°C	-5~+40(Special application please refer to temperature compensation correction)
	Storage temperature	°C	-25~+70
Installation	Terminal connection type	°C	Cable/Pin-type busbar
	Terminal size top / bottom for cable	mm <sup>2</sup>	50
		AWG	18-1/0
	Terminal size top / bottom for busbar	mm <sup>2</sup>	50
		AWG	18-1/0
	Tightening torque	N*m	3.5
		ln-lbs	31
Mounting		On DIN rail EN60715(35mm)by means of fast clip device	
Connection		From top and bottom	

**Overall and mounting dimensions(mm)**

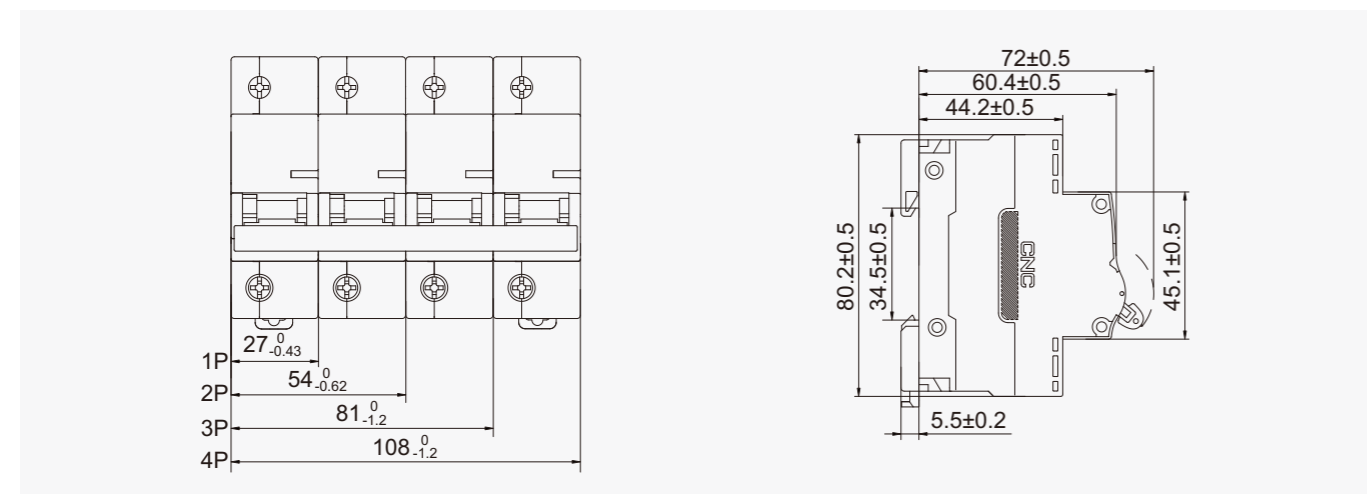

**Modular DIN Rail**  
**YCB7LE-125 RCBO Electronic**

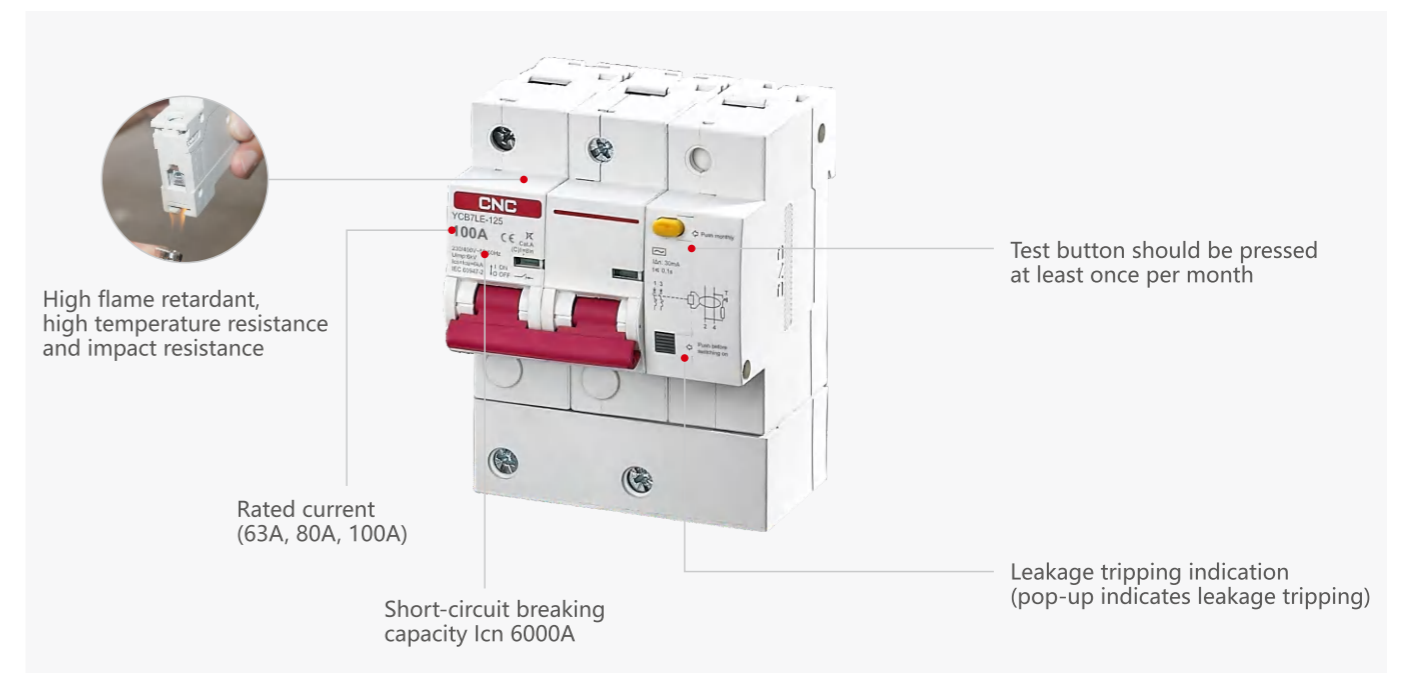

**General**

1. Personnel and fire protection
2. Cable and line protection against overload and short-circuits

**Selection**

1.  $I\Delta n \leq 30$  mA: additional protection in the case of direct contact.
2.  $I\Delta n \leq 300$  mA: preventative fire protection in the case of ground fault currents.
3. AC class – Tripping is ensured for sinusoidal, alternating currents, whether they be quickly applied or slowly increase.

Type	Tripping time	$I\Delta n(A)$	Expected result				Note		
			$I\Delta n$	$2I\Delta n$	$5I\Delta n$	$6I\Delta n$			
General	63, 80, 100, 125	$\geq 0.03$	0.1	0.07	0.04	0.04	Minimum time for tripping		
Time delay		Time limit for not tripping	0.06s	$\geq 0.03$	0.3	0.2	0.15	0.15	Minimum time for tripping
			0.1s	$\geq 0.03$	0.13	0.06	0.05	0.04	Minimum time for not tripping
		$\geq 0.03$		0.6	0.4	0.3	0.2	Minimum time for tripping	
		$\geq 0.03$	0.23	0.1	0.06	0.05	Minimum time for not tripping		

**Release**

Type	Test current	Tripping time	Expected result
C,D	1.05In	$t \leq 1h(In \leq 63A), t \leq 2h(In > 63A)$	Not tripping
C,D	1.3In	$t \leq 1h(In \leq 63A), t \leq 2h(In > 63A)$	Tripping
C,D	2.55In	$1s < t < 120s$	Tripping
C	$8In \times 80\%$	$t \leq 0.2s$	Not tripping
D	$12In \times 80\%$	$t \leq 0.2s$	Not tripping
C	$8In \times 120\%$	$t < 0.2s$	Tripping
D	$12In \times 120\%$	$t < 0.2s$	Tripping


## Modular DIN Rail

### YCB7LE-125 RCBO Electronic

#### Technical data

Type	Standard	IEC/EN 60947-2	
Electrical features	Type (wave form of the earth leakage sensed)	AC	
	Thermo-magnetic release characteristic	(C)li=8In,(D)li=12In	
	Rated current In	A 63, 80, 100	
	Poles	1P+N, 2P, 3P, 3P+N, 4P	
	Rated voltage Ue	V 230/400	
	Rated sensitivity IΔn	A 0.03, 0.1, 0.3	
	Rated short-circuit capacity Icn	A 6000	
	Break time under IΔn	s ≤0.1	
	Rated impulse withstand voltage (1.2/50)Uimp	V 4000	
	Dielectric TEST voltage at ind. Freq. for 1min	kV 1.89	
	Insulation voltage Ui	V 500	
	Pollution degree	3	
	Mechanical features	Electrical life	1500
Mechanical life		8500	
Contact position indicator		Yes	
Protection degree		IP20	
Ambient temperature(with daily average≤35°C)		°C -5...+40	
Installation	Storage temperature	°C -25...+70	
	Terminal connection type	Cable/Pin-type busbar	
	Terminal size top/bottom for cable	mm <sup>2</sup>	16~50
		AWG	6-1/0
	Terminal size top/bottom for busbar	mm <sup>2</sup>	16~35
		AWG	6-2
	Tightening torque	N·m	3.5
In·lbs		31	
Mounting	On DIN rail EN 60715 (35mm) by means of fast clip device		
Connection	From top		

#### Overall and mounting dimensions(mm)

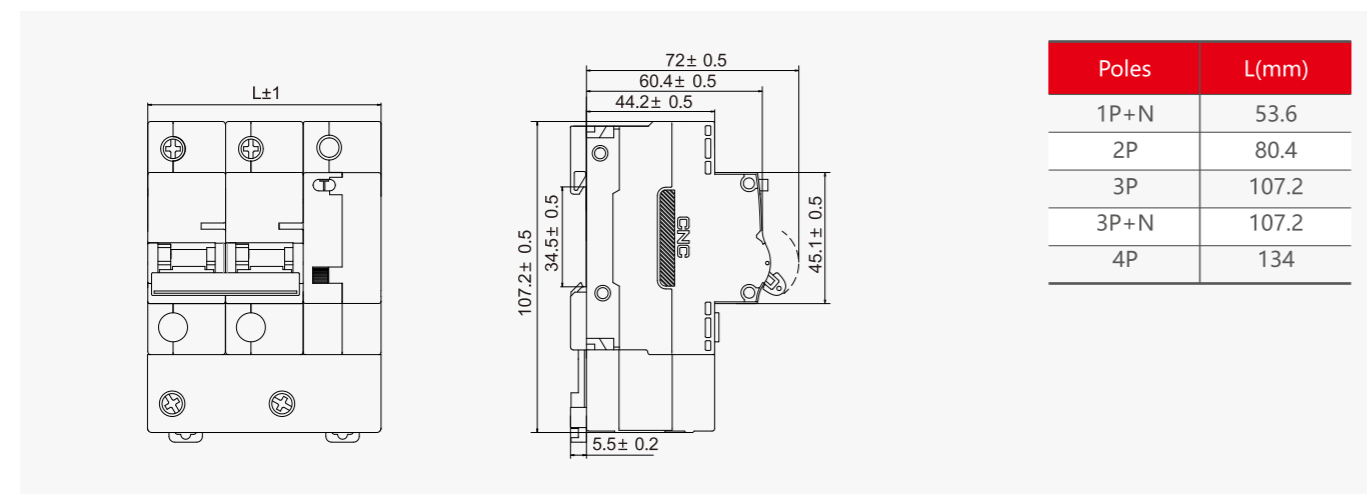

## Modular DIN Rail

### YCB7RL-100 RCCB Electromagnetic



#### General

YCB7RL-100 series electromagnetic residual current operated circuit breaker is mainly suitable for AC distribution networks with a rated working voltage of 230V or 400V at 50Hz and a rated current of 63A. Used for indirect contact protection of people, and can also be used to prevent fire hazards caused by insulation damage to circuits and equipment, resulting in ground fault currents.

#### Feature

Protection against the effects of sinusoidal alternating earth fault currents. The leakage protection feature does not require an auxiliary power supply. Not affected by voltage fluctuations in the power grid.

#### Selection

YCB7RL	-	100	1P+N	63	100mA	A Type
Model		Shell grade current	Pole	Rated current	Rated residual operating current	Type
RCCB Electromagnetic	-	100	1P+N 3P+N	6	Default: 30mA 100mA 300mA	Default: AC Type A Type
				10		
				16		
				20		
				25		
				32		
40						
50						
63						

Note: This product cannot be assembled with attachments

Modular DIN Rail


**YCB7RL-100 RCCB Electromagnetic**

A

Technical data

Model	YCB7RL-100		
Electrical features	Leakage type		Electromagnetic type
	Rated current In	A	6,10,16, 25, 32, 40, 50, 63, 80, 100
	Type (wave form of the earth leakage sensed)		A, AC
	Poles	P	1P+N, 3P+N
	Rated voltage Ue	V	230/400
	Insulation voltage Ui	V	500
	Rated frequency	Hz	50/60
	Rated breaking capacity Inc=I <sup>Δ</sup> c	A	6000, 10000
	Rated impulse withstand voltage (1.2/50) Uimp	V	6000
	Dielectric test voltage at ind. Freq. for 1min	Kv	2.5
	Rated sensitivity IΔn	A	0.03, 0.1, 0.3
	Rated residual making and breaking capacity I <sup>Δ</sup> m	A	500(In≤40A); 630(In=50A/63A);1000(In=80A/100A)
	Pollution degree		2
	Electrical life	t	4000
Mechanical features	Mechanical life	t	8000
	Protection degree		IP20
	Storage temperature	°C	-25~+70
	Ambient temperature (with daily average≤35°C)	°C	-5~+40
	Terminal connection type		Cable/Pin-type busbar/U-type busbar
Installation	Terminal size top / bottom for cable	mm <sup>2</sup>	25/35
	Terminal size top / bottom for busbar	AWG	18-3/18-2
	Tightening torque	mm <sup>2</sup>	10/16
		AWG	18-8/18-5
	Mounting	N*m	2.5
		In - lbs	22
Connection		On DIN rail EN 60715(35mm)by means of fast clip device From top or bottom	

Overall and mounting dimensions(mm)

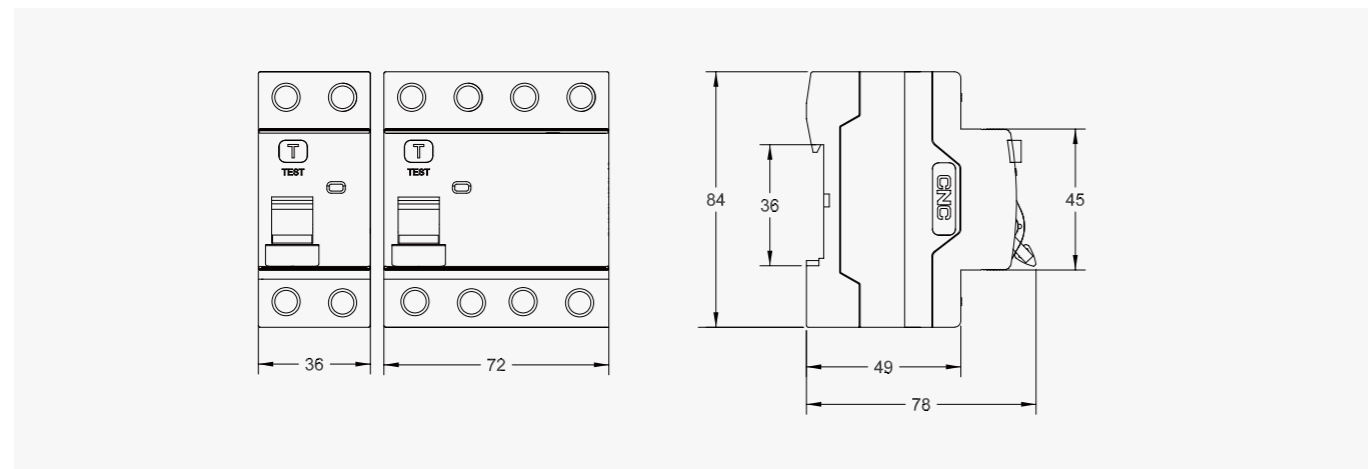

Modular DIN Rail

**YCH7-125 Isolating Switch**

A

General

YCH7-125 series isolating switch is suitable in the resistive circuit of AC 50/60HZ, rated voltage 230/400V, rated current up to 125A. It's used primarily for circuit's turning on or off in non-load edsituation. And it functions on connection and isolation between lines and power, especially suitable to isolate power effectively and prevent circuit breaker from closing accidentally when maintain the circuit in order to ensure the safe operation of maintainer. Standard: IEC600947-3



Feature

- Contact position indication
- Anti-skid handle for easy and reliable operation
- Flame retardant, high temperature resistance and impact resistance

## Modular DIN Rail

### YCH7-125 Isolating Switch

# YCB9 Series

A


#### Technical data

Model	YCH7-125		
Electrical features	Poles	P	1, 2, 3, 4
	Rated voltage Ue	V	230/400
	Rated current Ie	A	20,32,40,63, 80,100,125
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)Uimp	V	4000
	Rated short-time withstand current Icw		12Ie, 1s
	Rated making and breaking capacity		3Ie, 1.05Ue, cosΦ=0.65
	Rated short circuit making capacity		20Ie, t=0.1s
	Dielectric test voltage at ind.Freq.for 1min	Kv	2.5
	Insulation voltage Ui	V	500
Mechanical features	Pollution degree		2
	Use Category	t	AC-22A
	Electrical life	t	1500
	Mechanical life		8500
Installation	Protection degree		IP20
	"Terminal size top/bottom for cable and pin-type busbar"	mm <sup>2</sup> AWG	50 18-1/0
Operating Conditions	Ambient temperature(with daily average≤35°C)		-25~+60
	Altitude		Not higher than 2000m
	Installation Method		Embedded vertical standard rail mounting
	Wiring Method		Clamp connection wire with screw, tightening torque 2.5N.m



- High breaking capacity up to 10kA
- Miniature Circuit Breaker Rated current up to 80A
- Leakage function can be selected in various places


#### Overall and mounting dimensions(mm)

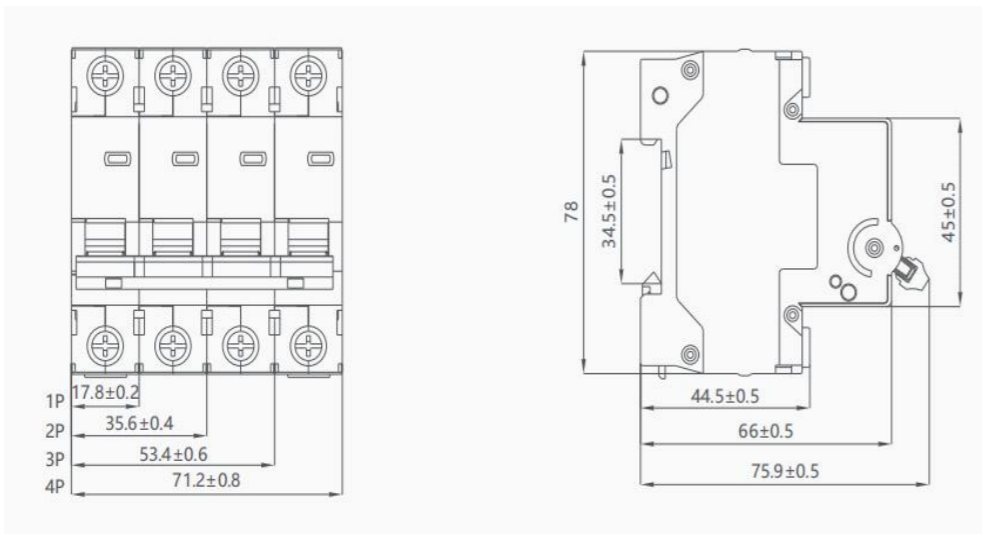



# YCB9 Series MCB

## Overview

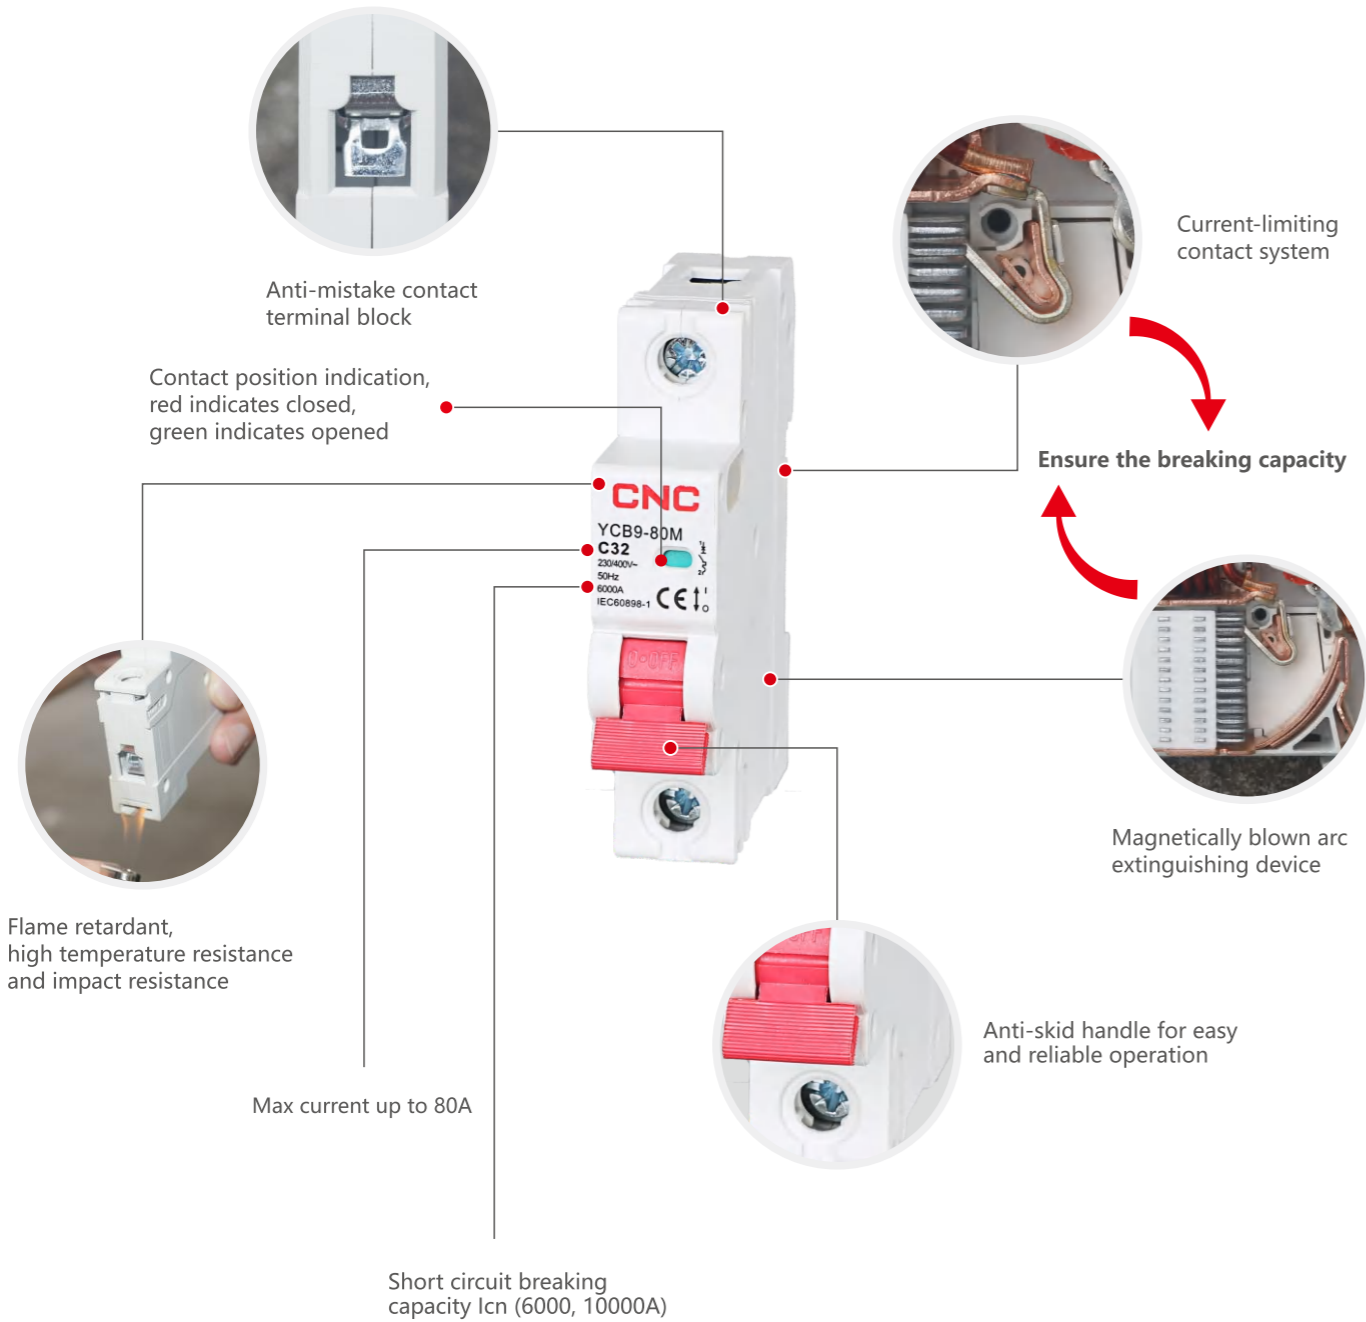

## Modular DIN Rail YCB9-80M/H MCB



### General

The YCB9-80 series miniature circuit breaker are suitable for overcurrent protection of building line facilities and similar purposes in AC 50/60Hz, rated voltage 230V/400V, rated current up to 80A circuits. They have isolation, overload, and short circuit protection functions, and can also be used for infrequent operation and switching of lines under normal circumstances. Circuit breakers are suitable for various places such as industry, commerce, high-rise buildings, and residential buildings.  
Standard: IEC/EN 60898-1

### Selection

YCB9	80	M	1P	C	16	Double busbar
Model	Shell grade current	Breaking capacity	Number of poles	Tripping characteristics	Rated current	Others
Miniature circuit breaker	80	M:6kA H:10kA	1P 2P 3P 4P	B C D	1	/:Single busbar DB:Double busbar
					2	
					4	
					6	
					10	
					16	
					20	
					25	
					32	
					40	
50						
63						
80						

Note: This product can be assembled with accessories (YCB9-80 OF/SD/OF+SD/MX/MVMN/MX+OF, etc)




## Modular DIN Rail YCB9-80M/H MCB

### Technical data

Type	Standard			
Comprehensive data	Function		Overload, Short circuit, Isolation	
	Number of poles		1P,2P,3P,4P	
	Rated current $I_n$	A	1-80A	
	Rated frequency	Hz	50/60Hz	
Electrical features	Rated voltage $U_e$	V	230/400	
	Rated insulation voltage $U_i$	V	500	
	Rated breaking capacity $I_{cn}$	A	M:6000 H:10000	
	Rated impulse withstand voltage $U_{imp}(1.2/50)$	kA	4	
	Pollution degree		2	
	Use category		II, III	
	Trip type		Thermal magnetic release	
	Thermal magnetic tripping characteristics		B,C,D	
	Electrical and mechanical accessories		□	
Mechanical features	Mechanical life	Times	20000	
	Electrical life	Times	10000	
	Protection degree		IP20	
	Antihumidity and heat resistance		The relative humidity of the air is not more than 50% when the ambient air temperature is +40°C, and it can have a higher relative humidity at a lower temperature	
	Reference ambient temperature	°C	30	
	Ambient temperature	°C	-5°C-+40°C, the average value of 24h does not exceed +35°C	
	Height	m	Not exceeding 2000	
Installation	Busbar connection type		Single or Double bus bar Anti-mistake contact terminal block	
	Terminal connection type		Cable/U-type busbar/Pin-type busbar	
	Maximum wire capacity	Terminal size top/bottom for cable	mm <sup>2</sup>	25
			AWG	18-3
		Terminal size top/bottom for busbar	mm <sup>2</sup>	25
			AWG	18-3
	Torque		N*m	2
			In-lbs	18
	Tool	18		Phillips screwdriver or flat-blade screwdriver
	Installation			On DIN rail EN 60715 (35mm) by means of fast clip device
Wiring method			From top or bottom	

## Modular DIN Rail YCB9-80M/H MCB


### Overall and mounting dimensions(mm)

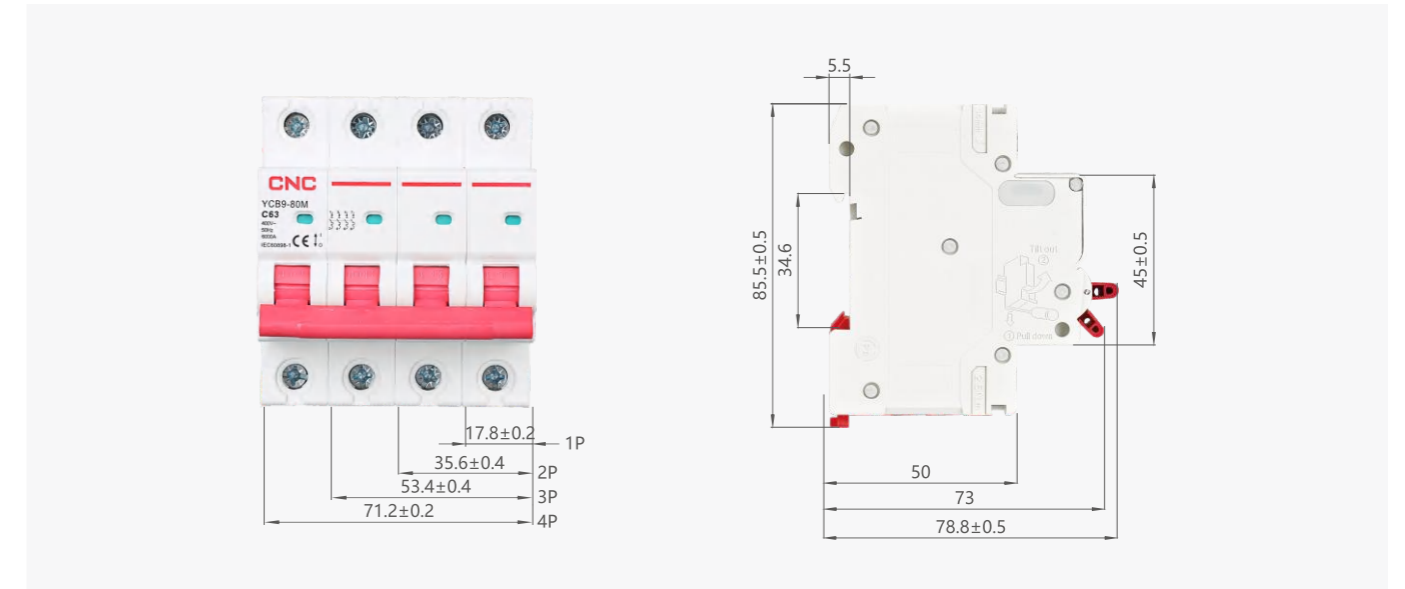

### Tripping characteristic

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13 $I_n$	$t \leq 1h(I_n \leq 63A)$	Not tripping	B	3 $I_n$	$t \leq 0.1s$	Not tripping
	1.13 $I_n$	$t \leq 2h(I_n > 63A)$		C	5 $I_n$	$t \leq 0.1s$	
B,C,D	1.45 $I_n$	$t < 1h(I_n \leq 63A)$	Tripping	D	10 $I_n$	$t \leq 0.1s$	
	1.45 $I_n$	$t < 2h(I_n > 63A)$		B	5 $I_n$	$t < 0.1s$	Tripping
B,C,D	2.55 $I_n$	$1s < t < 60s(I_n \leq 32A)$	Tripping	C	10 $I_n$	$t < 0.1s$	
	2.55 $I_n$	$1s < t < 120s(I_n > 32A)$		D	20 $I_n$	$t < 0.1s$	

### Curve

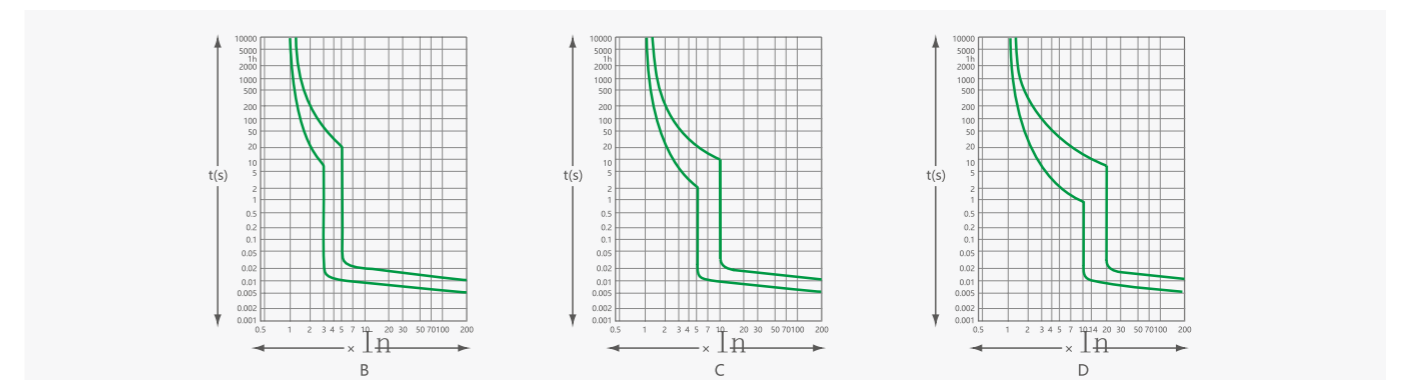

## Modular DIN Rail


### YCB9 Series MCB Accessories

#### General

This series circuit breaker accessories are used in household, building and other electrical circuits, cooperated with YCB9 series circuit breaker to select different accessories according to the needs, so as to realize the remote control of circuit breaker, provide auxiliary signal, opening and closing status indication, provide alarm signal function for better protect the circuit, personal and property safety.

Standard: IEC60947-5-1

#### Type designation

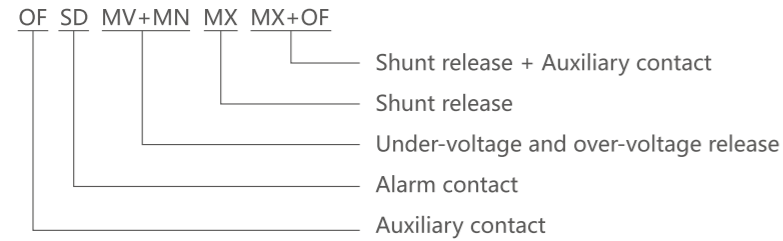

#### Function

Accessory name	Code	Function
Auxiliary contact	OF	Provide auxiliary signal and control auxiliary circuit
Alarm contact	SD	When the circuit breaker is disconnected due to the fault, the alarm signal shall be provided.
Shunt release	MX	Over the range of 70% ~ 110% of the rated control supply voltage, the release should trip the circuit breaker to protect the circuit.
Shunt release + Auxiliary contact	MX+OF	Remote control of circuit and control the auxiliary circuit by auxiliary contact.
Over-voltage and under-voltage release	MV+MN	When the rated voltage 230V increase to 270V+/-5% or reduce to 170V+/-5%, the circuit breaker should trip for over-voltage and under-voltage protection.

#### Installation

All the electrical accessories should install in the side of circuit breaker. Details as the figure below. (Remark: each MCB max install with 3 indicate accessories(OF or SD), 2 release accessories.)



#### Operating conditions

- Ambient temperature: -5°C~+40°C;
- Altitude: Below 2000m;
- Environment: The medium should be no risk of blasting and can't corrode the metal and damage insulating gas as well as conductive dust;
- Installation: 35mm standard din rail.

## Modular DIN Rail

### YCB9 Series MCB Accessories

#### Technical data

Auxiliary contact and Alarm contact technical parameters

Accessory name	Rated current(A)			Number of contacts	Diagram
	AC 380V	AC 220V	AC 110V		
Auxiliary contact OF	3	6	1	1NO 1NC	
Alarm contact SD	3	6	1	1NO 1NC	


Shunt release, Shunt release + Auxiliary contact technical parameters

Accessory name	Rated insulation voltage Ui	Rated control voltage Us	Tripping power consumption (W or VA)	Operation voltage Us	Diagram
Shunt release MX	415V	AC/DC: 220~380V 110~220V	240	0.7~1.1	
		AC/DC: 24~48V	120		
Shunt release + Auxiliary contact MX+OF	415V	AC/DC: 220~380V 110~220V	240	0.7~1.1	
		AC/DC: 24~48V	120		

Under-voltage & Over-voltage Release technical parameters

Accessory name	Rated working voltage Ue	Trip voltage	Diagram
Over-voltage and under-voltage release MV+MN	AC230V	Under-voltage: 170V±5% Over-voltage: 270V±5%	
	AC380V	Under-voltage: 300V±5% Over-voltage: 460V±5%	

## Modular DIN Rail YCB9-63 MCB

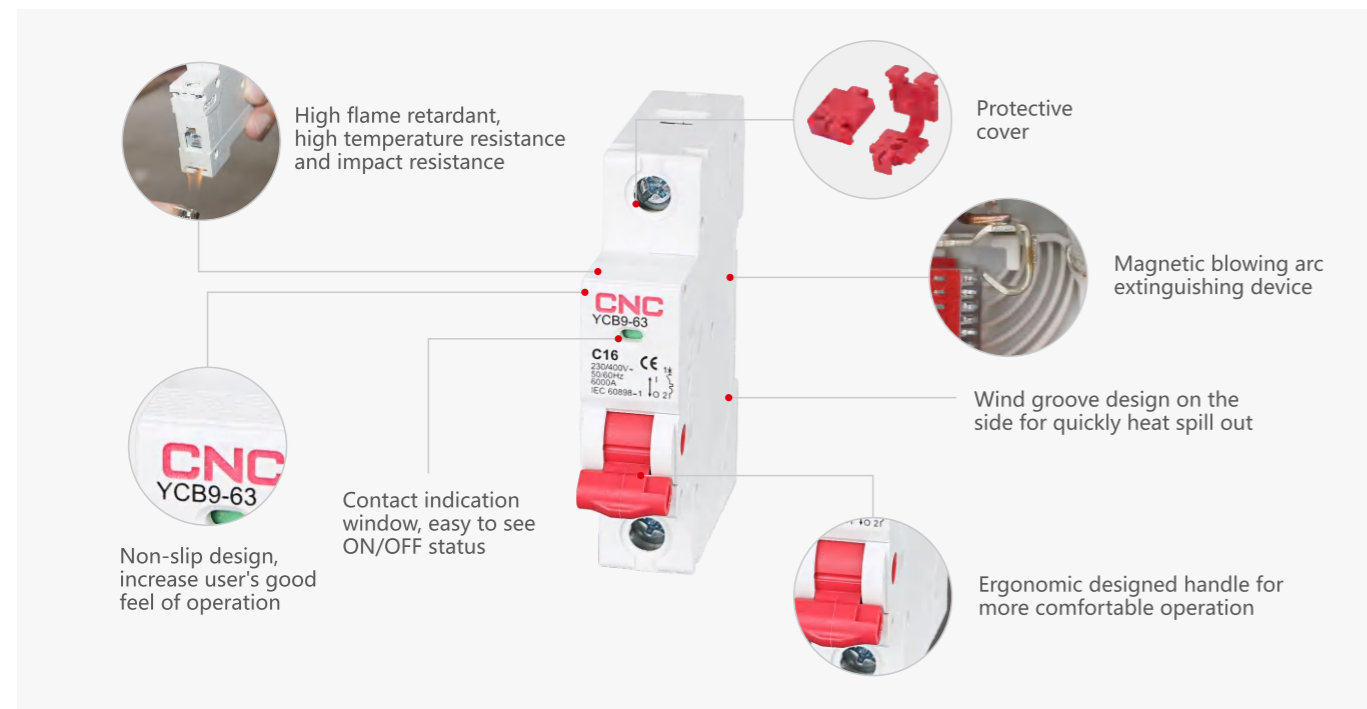


### General

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure
5. According to the type of instantaneous release classified as follows : type B(3-5)I<sub>n</sub>, type C(5-10)I<sub>n</sub>, type D(10-20)I<sub>n</sub>

### Selection

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h(I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h(I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h(I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	
	1.45I <sub>n</sub>	t < 2h(I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	
B,C,D	2.55I <sub>n</sub>	1s < t < 60s(I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	
	2.55I <sub>n</sub>	1s < t < 120s(I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

### Curve

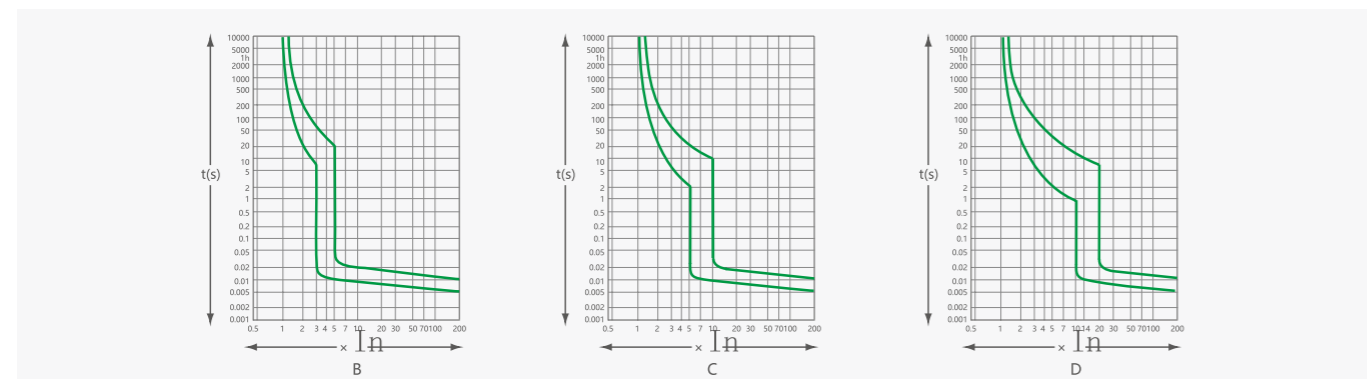


## Modular DIN Rail YCB9-63 MCB

### Technical data


Type	Standard		IEC/EN 60898-1
Electrical features	Rated current I <sub>n</sub>	A	1, 2, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63
	Poles	P	1, 2, 3, 4
	Rated voltage U <sub>e</sub>	V	230/400
	Insulation voltage U <sub>i</sub>	V	500
	Rated frequency	Hz	50/60
	Rated breaking capacity	A	4500,6000
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4500(80A) / 6000(1-63A)
	Dielectric test voltage at ind. Freq. for 1min	kV	2
	Pollution degree		2
	Thermo-magnetic release characteristic		B, C, D
Mechanical features	Electrical life	t	8000
	Mechanical life	t	20000
	Protection degree		IP20
	Reference temperature for setting of thermal element	°C	30
	Ambient temperature (with daily average ≤ 35°C)	°C	-5~+40
	Storage temperature	°C	-25~+70
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top / bottom for cable	mm <sup>2</sup>	25
		AWG	18-3
	Terminal size top / bottom for busbar	mm <sup>2</sup>	25
		AWG	18-3
	Tightening torque	N*m	2
		In-lbs	18
	Mounting		On DIN rail EN 60715(35mm)by means of fast clip
Connection		From top or bottom	

### Overall and mounting dimensions(mm)

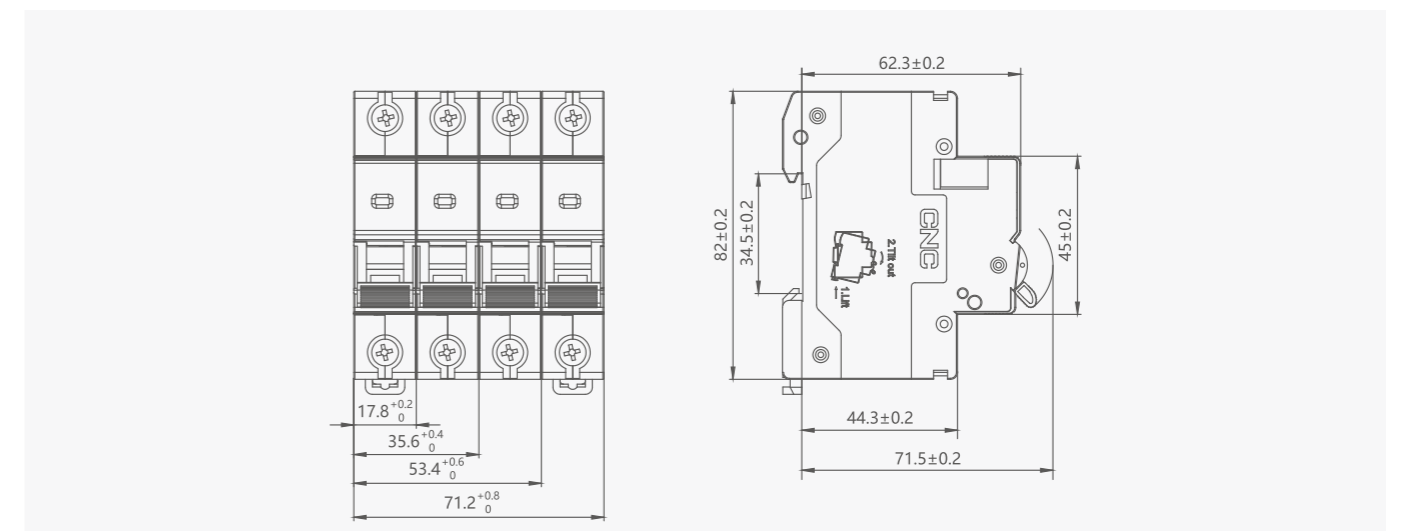



**Modular DIN Rail**  
**YCB9N-40 MCB DPN**

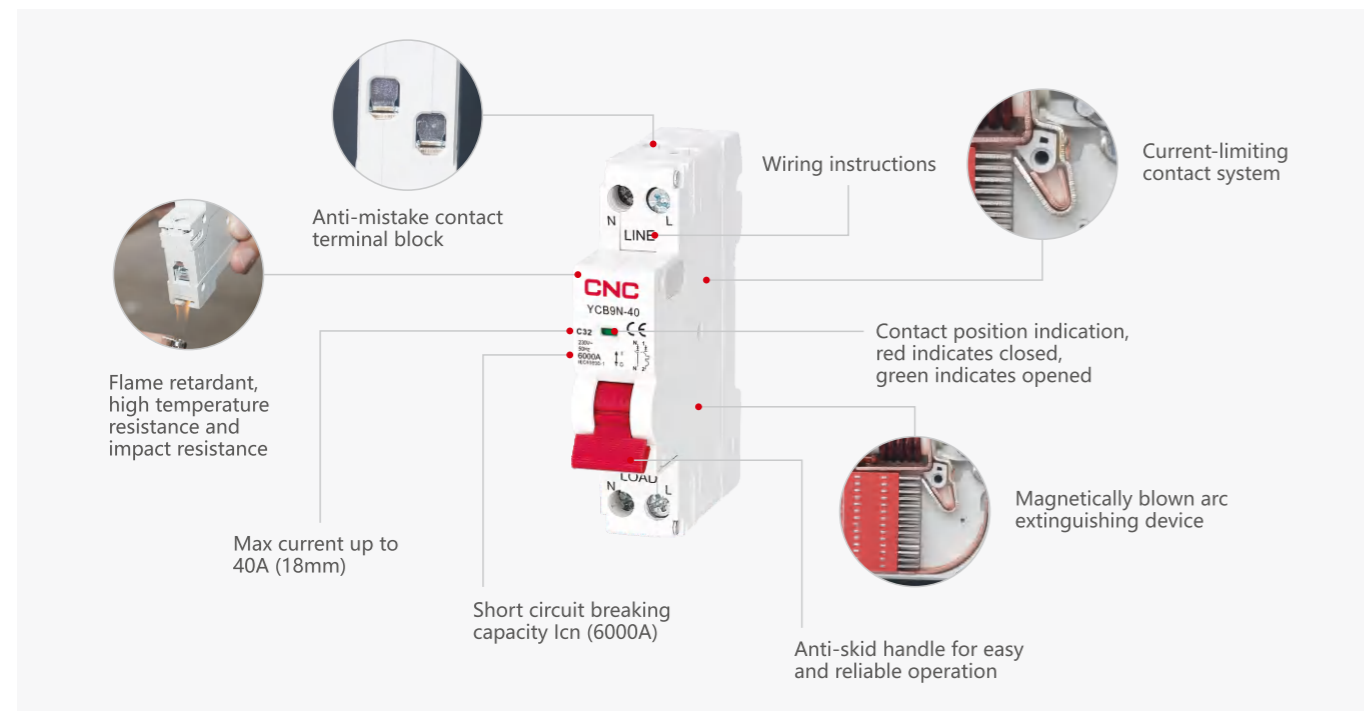


**General**

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure
5. According to the type of instantaneous release classified as follows: type B(3-5)In, type C(5-10)In

**Selection**

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C	1.13In	t ≤ 1h (In ≤ 63A)	Not tripping	B	3In	t ≤ 0.1s	Not tripping
	1.13In	t ≤ 2h (In > 63A)					
B,C	1.45In	t < 1h (In ≤ 63A)	Tripping	C	5In	t ≤ 0.1s	Tripping
	1.45In	t < 2h (In > 63A)					
B,C	2.55In	1s < t < 60s (In ≤ 32A)	Tripping	B	5In	t < 0.1s	Tripping
	2.55In	1s < t < 120s (In > 32A)					
				C	10In	t < 0.1s	

**Curve**

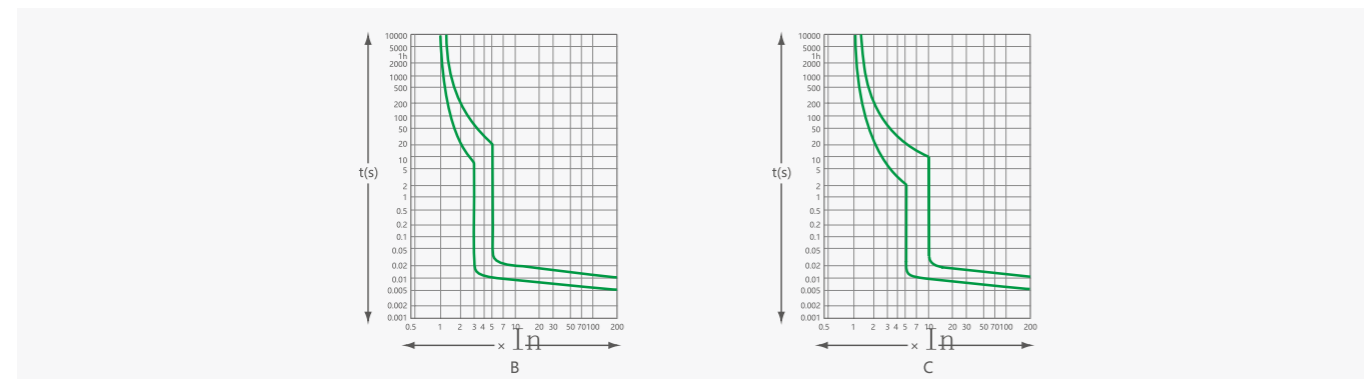


**Modular DIN Rail**  
**YCB9N-40 MCB DPN**

**Technical data**


Type	Standard	IEC/EN 60898-1	
Electrical features	Rated current In	A	6, 10, 16, 20, 25, 32, 40
	Poles	P	1P+N
	Rated voltage Ue	V	230
	Insulation voltage Ui	V	500
	Rated frequency	Hz	50/60
	Rated breaking capacity	A	6000
	Rated impulse withstand voltage(1.2/50)Uimp	V	4000
	Dielectric test voltage at ind. Freq. for 1min	kV	2
	Pollution degree		2
	Thermo-magnetic release characteristic		B, C
Mechanical features	Electrical life	t	8000
	Mechanical life	t	20000
	Protection degree		IP20
	Reference temperature for setting of thermal element	°C	30
	Ambient temperature (with daily average ≤ 35°C)	°C	-5 ~ +40
Storage temperature	°C	-25 ~ +70	
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top / bottom for cable	mm <sup>2</sup>	16
		AWG	18-5
	Terminal size top / bottom for busbar	mm <sup>2</sup>	10
		AWG	18-5
	Tightening torque	N*m	2
		In-lbs	18
	Mounting		On DIN rail EN 60715(35mm) by means of fast clip
Connection		From top or bottom	

**Overall and mounting dimensions(mm)**

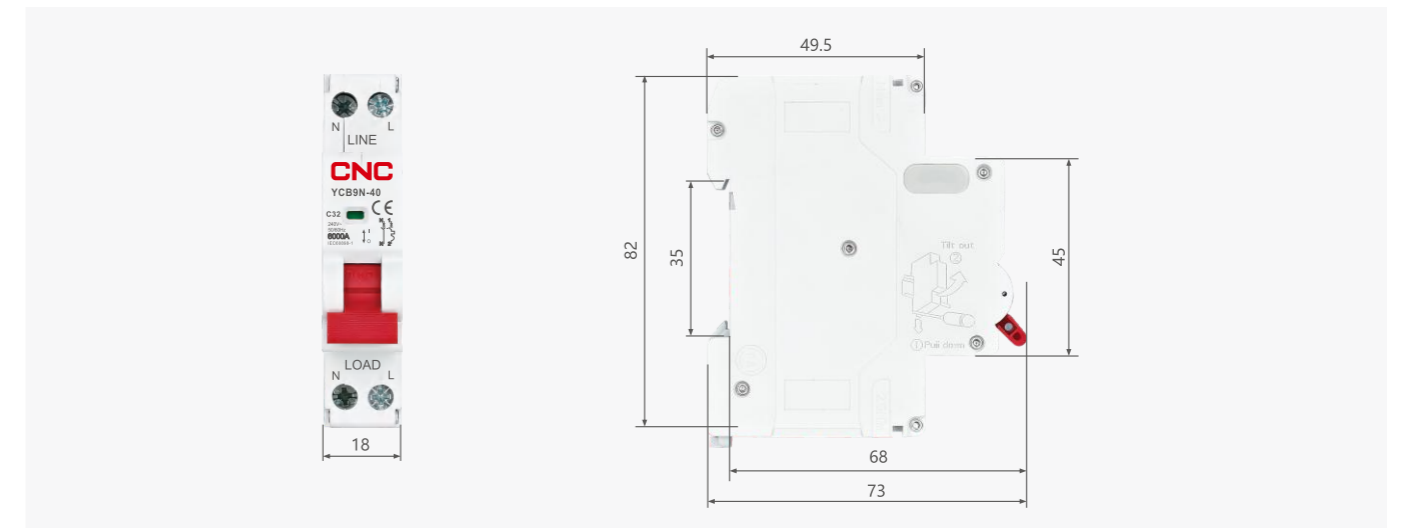

## Modular DIN Rail

### YCB9NL-40 RCBO Electronic

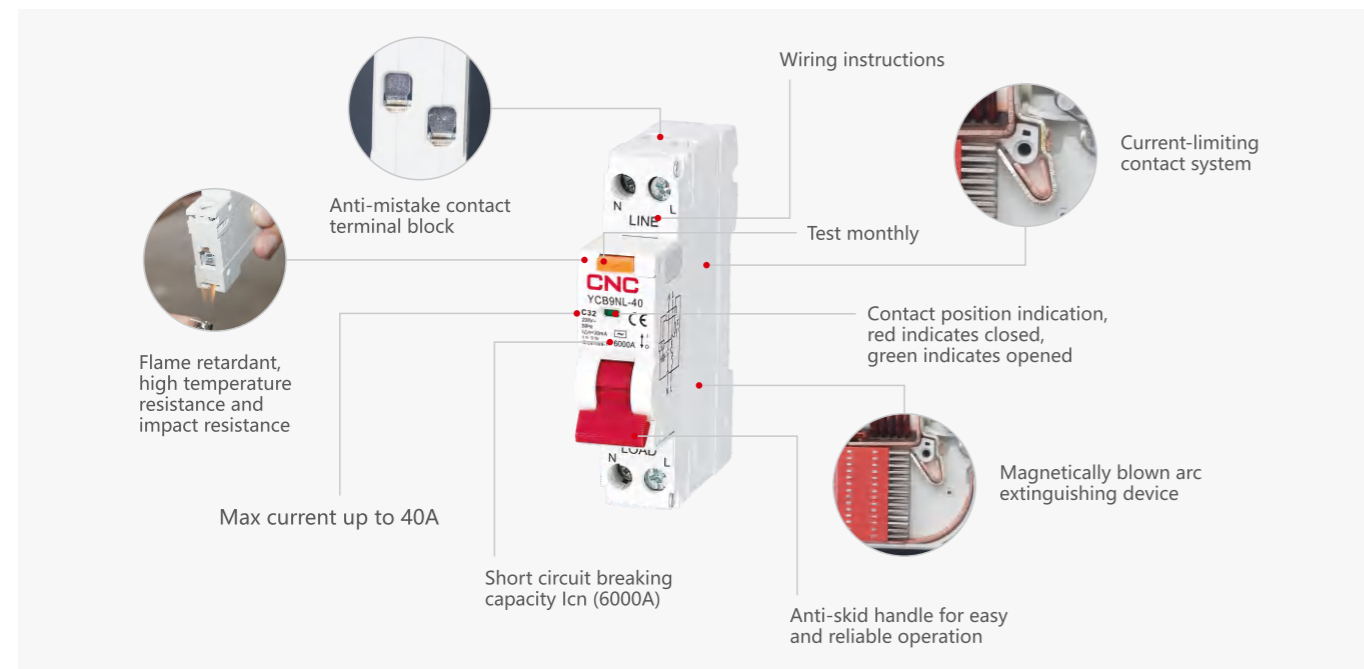


#### General

1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows : type B(3-5) $I_n$ , type C(5-10) $I_n$

#### Selection

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C	1.13 $I_n$	$t \leq 1h(I_n \leq 63A)$	Not tripping	B	3 $I_n$	$t \leq 0.1s$	Not tripping
	1.13 $I_n$	$t \leq 2h(I_n > 63A)$					
B,C	1.45 $I_n$	$t < 1h(I_n \leq 63A)$	Tripping	C	5 $I_n$	$t \leq 0.1s$	Tripping
	1.45 $I_n$	$t < 2h(I_n > 63A)$					
B,C	2.55 $I_n$	$1s < t < 60s(I_n \leq 32A)$	Tripping	B	5 $I_n$	$t < 0.1s$	Tripping
	2.55 $I_n$	$1s < t < 120s(I_n > 32A)$					
				C	10 $I_n$	$t < 0.1s$	

#### Curve

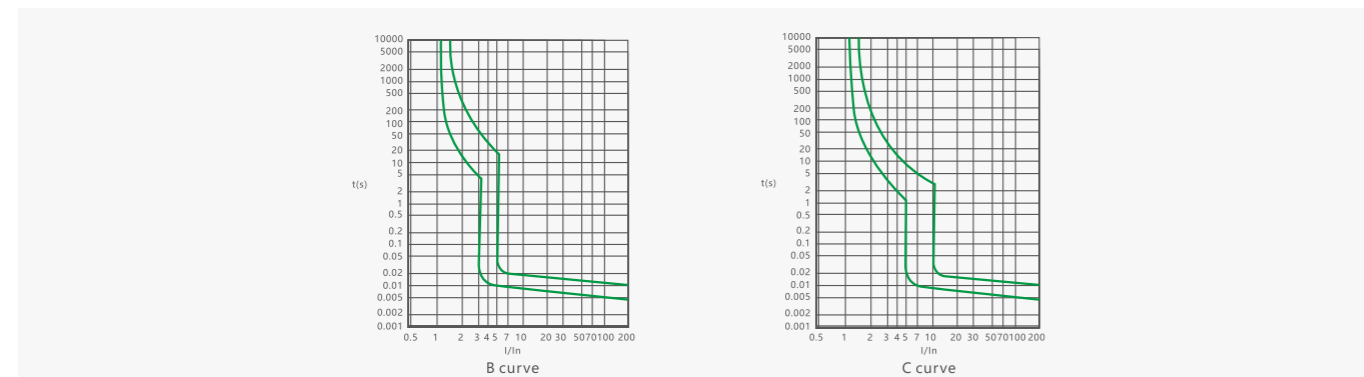


## Modular DIN Rail

### YCB9NL-40 RCBO Electronic


#### Technical data

Type	Standard		IEC/EN 61009-1
Electrical features	Poles	P	1P+N
	Type(wave form of the earth leakage sensed)		AC
	Thermo-magnetic release characteristic		B, C
	Rated current $I_n$	A	6, 10, 16, 20, 25, 32, 40
	Rated voltage $U_e$	V	230
	Rated sensitivity $I_{\Delta n}$	A	0.03, 0.05, 0.1
	Rated residual making and breaking capacity $I_{\Delta m}$	A	500( $I_n \leq 40A$ ) 630( $I_n > 40A$ )
	Rated short-circuit capacity $I_{cn}$	A	6000
	Break time under $I_{\Delta n}$	s	$\leq 0.1$
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50) $U_{imp}$	V	4000
	Dielectric test voltage at ind.Freq.for 1min	kV	2
	Insulation voltage $U_i$	V	500
	Pollution degree		2
Mechanical features	Electrical life	t	4000
	Mechanical life	t	10000
	Contact position indicator		Yes
	Protection degree		IP20
	Ambient temperature(with daily average $\leq 35^\circ C$ )	$^\circ C$	-5~+40
	Storage temperature	$^\circ C$	-25~+70
Installation	Terminal connection type		Cable/Pin-type busbar
	Terminal size top/bottom for cable	mm <sup>2</sup>	16
		AWG	18-5
	Terminal size top/bottom for busbar	mm <sup>2</sup>	10
		AWG	18-5
	Tightening torque	N*m	2
		In-lbs	18
	Mounting		On DIN rail EN60715(35mm)by means of fast clip
Connection		From top	

#### Overall and mounting dimensions(mm)

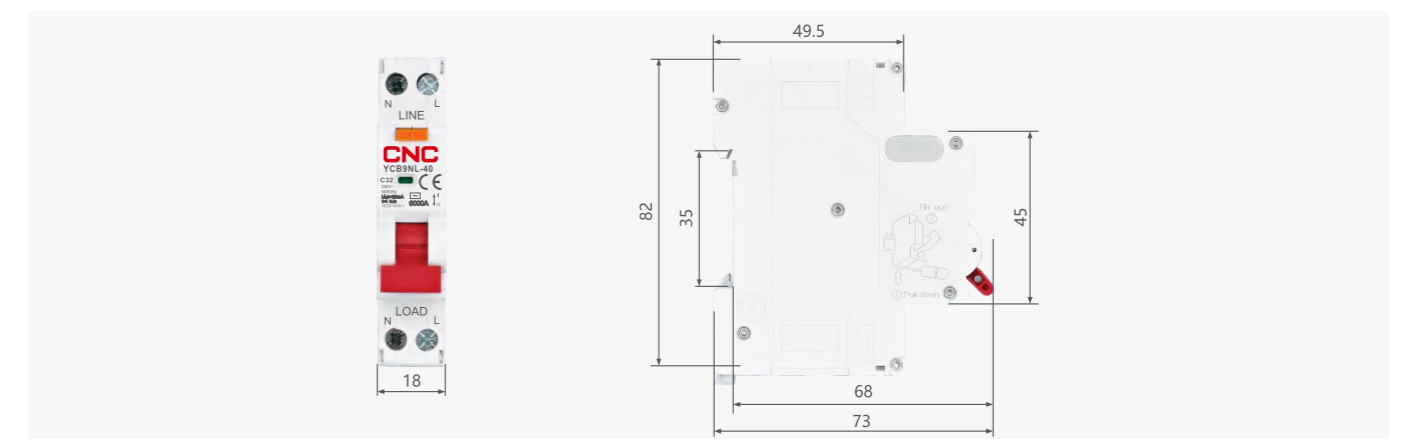

## YCB9L-40 RCBO Electromagnetic

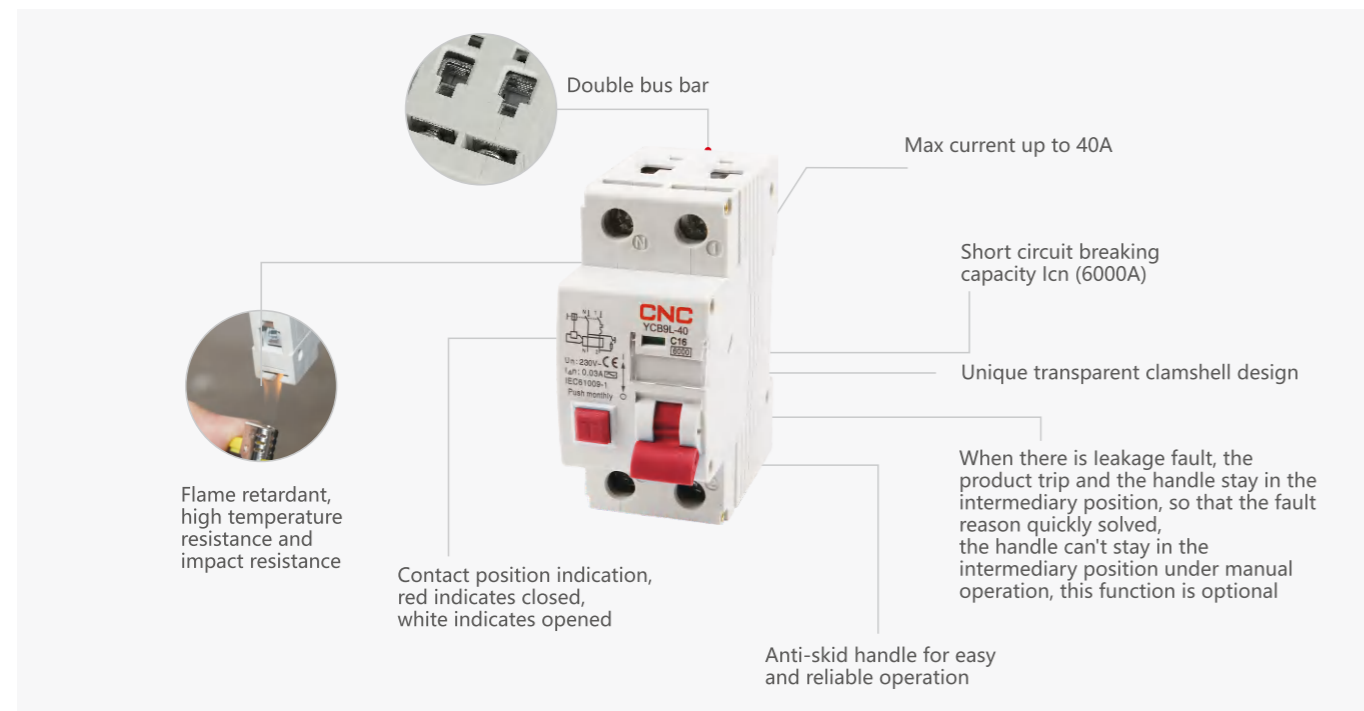

### General


1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows: type B(3-5) $I_n$ , type C(5-10) $I_n$

### Selection

Type	Test current	Tripping time	Expected result
B,C	1.13 $I_n$	$t \leq 1h(I_n \leq 63A)$	Not tripping
	1.13 $I_n$	$t \leq 2h(I_n > 63A)$	
B,C	1.45 $I_n$	$t < 1h(I_n \leq 63A)$	Tripping
	1.45 $I_n$	$t < 2h(I_n > 63A)$	
B,C	2.55 $I_n$	$1s < t < 60s(I_n \leq 32A)$	Tripping
	2.55 $I_n$	$1s < t < 120s(I_n > 32A)$	
B	3 $I_n$	$t \leq 0.1s$	Not tripping
C	5 $I_n$	$t \leq 0.1s$	
B	5 $I_n$	$t < 0.1s$	Tripping
C	10 $I_n$	$t < 0.1s$	

## YCB9L-40 RCBO Electromagnetic

### Curve

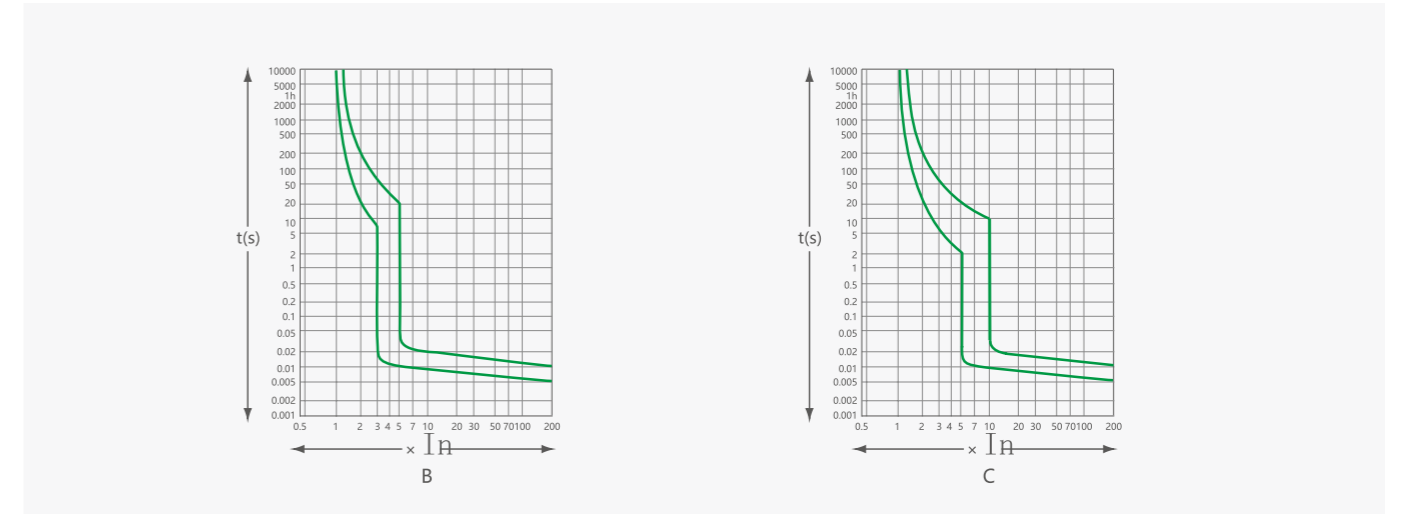


### Technical data

Type	Standard	IEC/EN 61009-1	
Electrical features	Leakage type	Electromagnetic type	
	Rated current $I_n$	A	6, 10, 16, 20, 25, 32, 40
	Type (wave form of the earth leakage sensed)		A, AC
	Poles	P	1P+N
	Rated voltage $U_e$	V	230
	Insulation voltage $U_i$	V	500
	Rated frequency	Hz	50/60
	Rated breaking capacity $I_{cn}$	A	6000
	Rated impulse withstand voltage (1.2/50) $U_{imp}$	V	4000
	Dielectric test voltage at ind. Freq. for 1min	kV	2
	Rated sensitivity $\Delta I_n$	A	0.03, 0.05, 0.1
	Break time under $\Delta I_n$	s	$\leq 0.1$
	Rated residual making and breaking capacity $\Delta I_m$	A	500
Mechanical features	Pollution degree		2
	Electrical life	t	4000
	Mechanical life	t	8000
	Protection degree		IP20
	Storage temperature	$^{\circ}C$	-25~+70
Installation	Ambient temperature (with daily average $\leq 35^{\circ}C$ )	$^{\circ}C$	-5~+40
	Terminal connection type		Cable/U-type bar/Pin-type busbar
	Terminal size top / bottom for cable	mm <sup>2</sup>	16
		AWG	18-5
	Terminal size top / bottom for busbar	mm <sup>2</sup>	16
		AWG	18-5
	Tightening torque	N*m	1.2
		ln-lbs	11
Mounting		On DIN rail EN 60715(35mm)by means of fast clip	
Connection		From top or bottom	

## Modular DIN Rail


### YCB9L-40 RCBO Electromagnetic

#### Overall and mounting dimensions(mm)

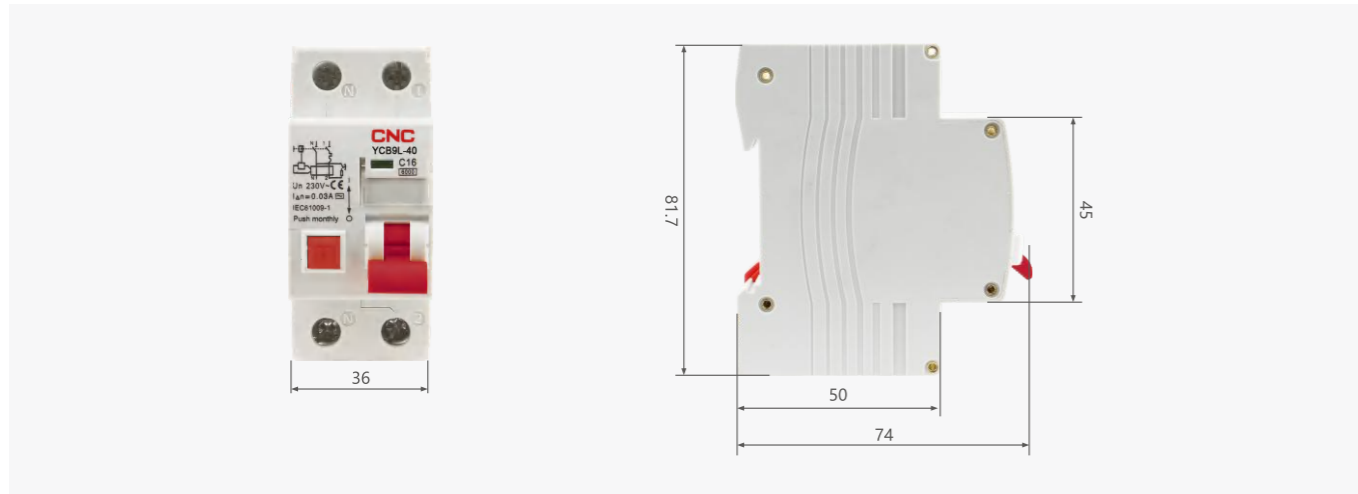

## Modular DIN Rail

### YCB9HL-63 RCBO Electromagnetic

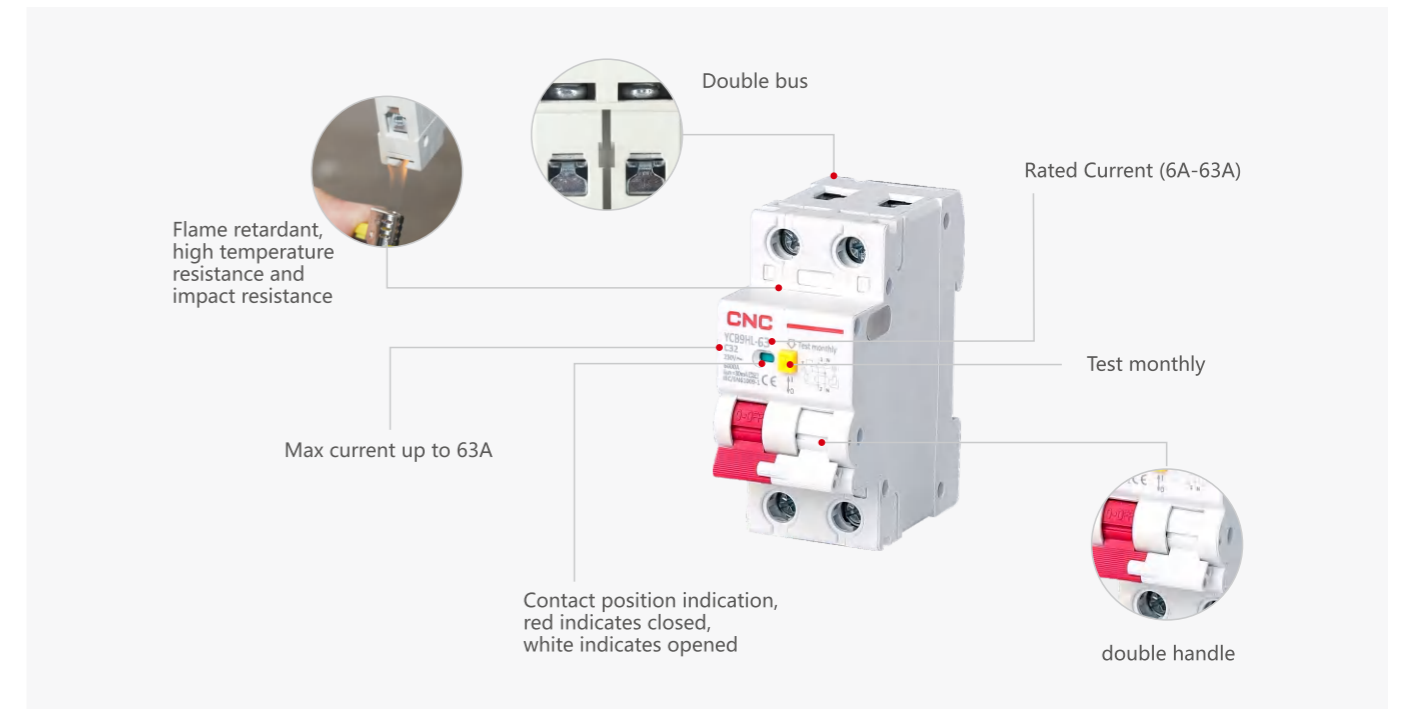

#### General

YCB9HL-63 RCBO is a combined structure, the N pole is on the right side of the product. Without auxiliary power supply, it overcomes the defects of electronic products: poor anti-interference, greatly affected by power grid voltage fluctuation and can't be protected if the neutral line is disconnected; Test circuit is dynamic controlled, and the test resistance is not easy to burn; N pole contact can be opened and closed separately, with isolation function; The impulse withstand voltage between L pole and N pole can reach up to 6000V; The impulse withstand voltage between L pole, N pole and the metal support can reach up to 8000V; It has the ability to bear under the impact current of 200A without misoperation.

1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows: type B(3-5)In, type C(5-10)In




## YCB9HL-63 RCBO Electromagnetic

### Selection

Type	Test current	Tripping time	Expected result
B,C	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)	
B,C	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)	
B,C	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)	
B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
C	5I <sub>n</sub>	t ≤ 0.1s	
B	5I <sub>n</sub>	t < 0.1s	Tripping
C	10I <sub>n</sub>	t < 0.1s	

### Curve

B,C Curve

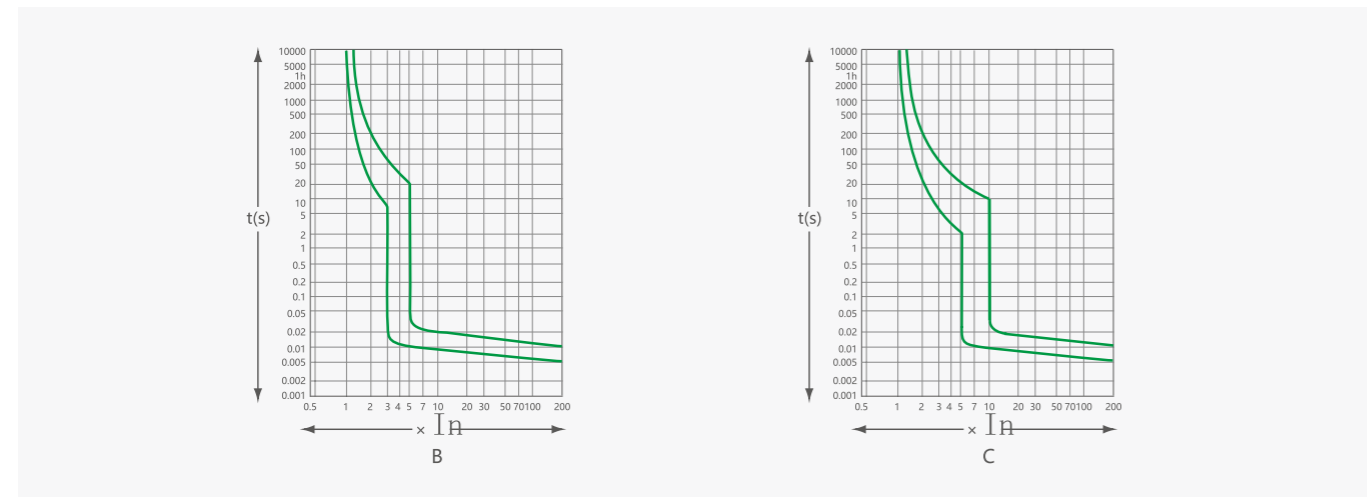


## YCB9HL-63 RCBO Electromagnetic


### Technical data

Type	Standard	IEC/EN 61009-1	
Electrical features	Leakage type	Electromagnetic type	
	Rated current I <sub>n</sub>	A	6, 10, 16, 20, 25, 32, 40, 50, 63
	Type (wave form of the earth leakage sensed)		A, AC
	Poles	P	1P+N
	Rated voltage U <sub>e</sub>	V	230
	Insulation voltage U <sub>i</sub>	V	500
	Rated frequency	Hz	50/60
	Rated breaking capacity I <sub>cn</sub>	A	6000
	Rated impulse withstand voltage (1.2/50) U <sub>imp</sub>	V	4000
	Dielectric test voltage at ind. Freq. for 1min	kV	2
	Rated sensitivity ΔI <sub>n</sub>	A	0.03, 0.05, 0.1
	Break time under IΔ <sub>n</sub>	s	≤ 0.1
	Rated residual making and breaking capacity IΔ <sub>m</sub>	A	500
	Pollution degree		2
Mechanical features	Electrical life	t	4000
	Mechanical life	t	8000
	Protection degree		IP20
	Storage temperature	°C	-25 ~ +70
Ambient temperature (with daily average ≤ 35°C)	°C	-5 ~ +40	
Installation	Terminal connection type		Cable/U-type bar/Pin-type busbar
	Terminal size top / bottom for cable	mm <sup>2</sup>	16
		AWG	18-5
	Terminal size top / bottom for busbar	mm <sup>2</sup>	16
		AWG	18-5
	Tightening torque	N*m	1.2
		In-lbs	11
Mounting		On DIN rail EN 60715(35mm) by means of fast clip	
Connection		From top or bottom	

### Overall and mounting dimensions(mm)

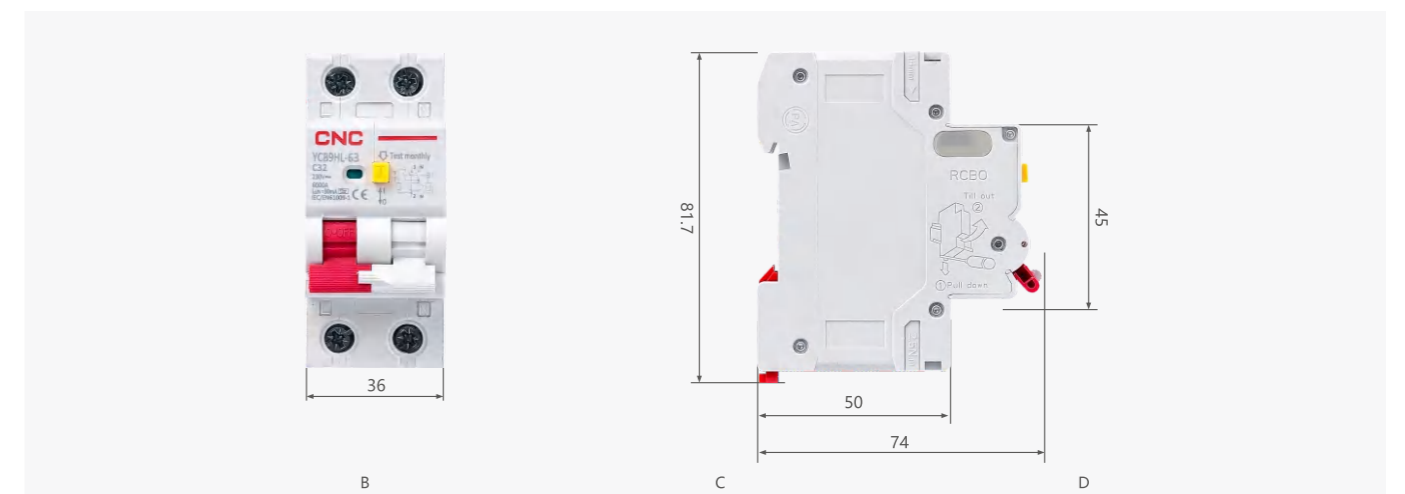

**YCB9LE-80M RCBO Electronic**

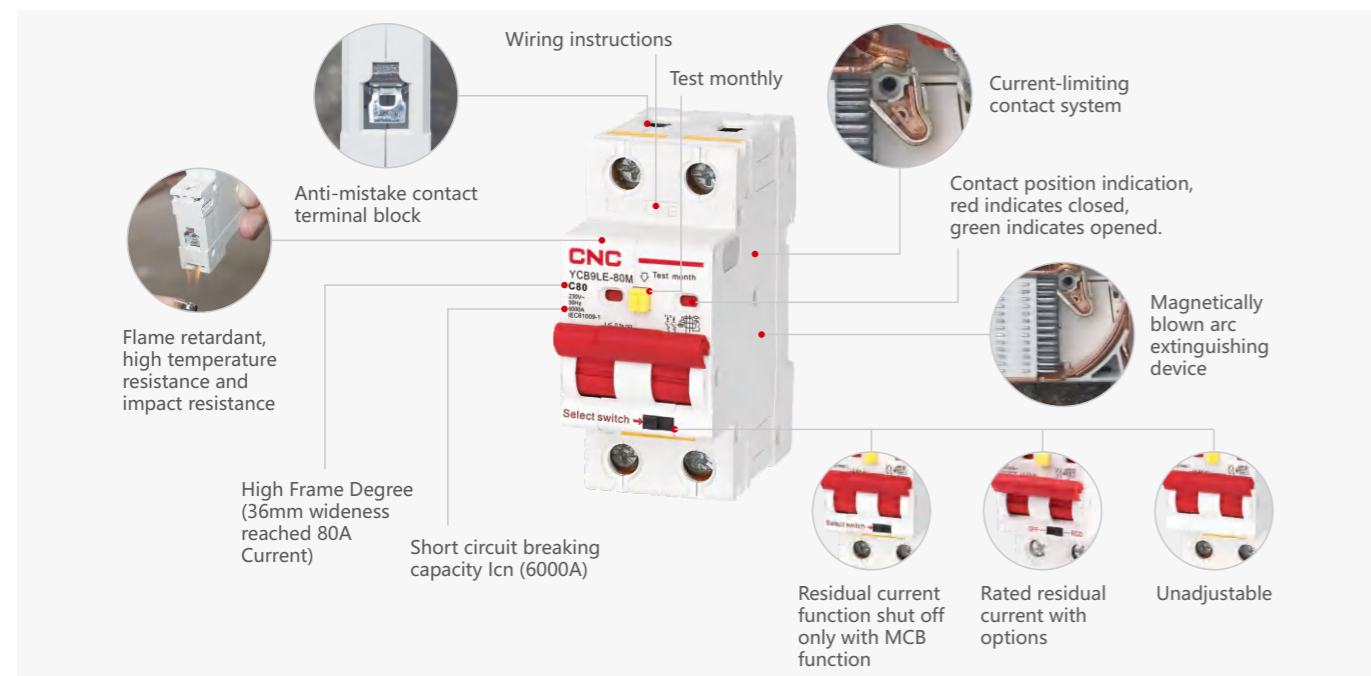


**General**

1. Protection against overload and short-circuit currents
2. Protection against the effects of sinusoidal alternating earth fault currents
3. Protection against indirect contacts and additional protection against direct contacts.
4. Protection against fire hazard caused by insulation faults
5. Used in residential building
6. According to the type of instantaneous release classified as follows : type B(3-5) $I_n$ , type C(5-10) $I_n$ , type D(10-20) $I_n$

**Release**

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13 $I_n$	$t \leq 1h(I_n \leq 63A)$	Not tripping	B	3 $I_n$	$t \leq 0.1s$	Not tripping
	1.13 $I_n$	$t \leq 2h(I_n > 63A)$		C	5 $I_n$	$t \leq 0.1s$	
B,C,D	1.45 $I_n$	$t < 1h(I_n \leq 63A)$	Tripping	D	10 $I_n$	$t \leq 0.1s$	Tripping
	1.45 $I_n$	$t < 2h(I_n > 63A)$		B	5 $I_n$	$t < 0.1s$	
B,C,D	2.55 $I_n$	$1s < t < 60s(I_n \leq 32A)$	Tripping	C	10 $I_n$	$t < 0.1s$	Tripping
	2.55 $I_n$	$1s < t < 120s(I_n > 32A)$		D	20 $I_n$	$t < 0.1s$	

**Curve**

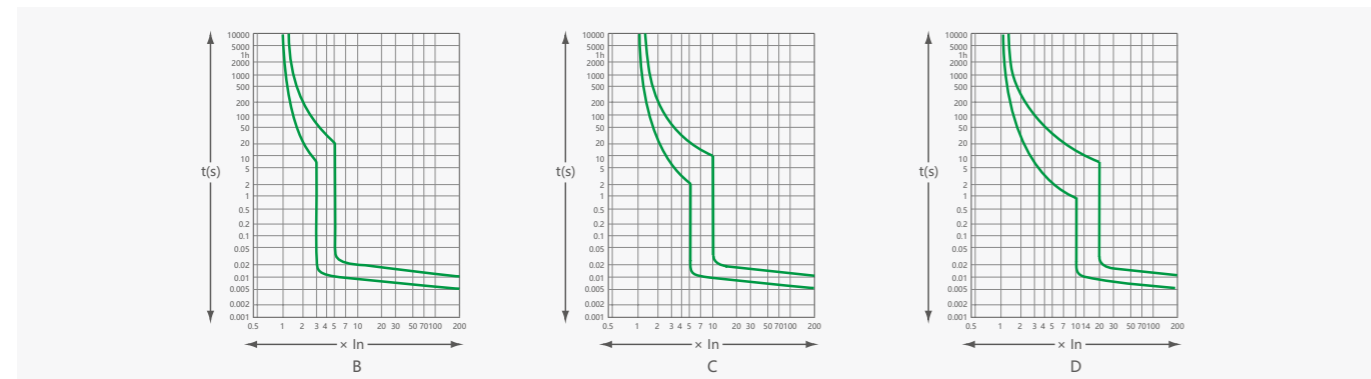


**YCB9LE-80M RCBO Electronic**


**Specifications**

Type	Standard		IEC/EN 61009-1
Electrical features	Poles	P	2, 4
	Type(wave form of the earth leakage sensed)		A/AC
	Thermo-magnetic release characteristic		B, C, D
	Rated current $I_n$	A	1, 2, 3, 4, 6, 10, 16, 20, 25, 32, 40, 50, 63, 80
	Rated voltage $U_e$	V	230/400
	Rated sensitivity $I_{\Delta n}$	A	0.03, 0.05, 0.1, 0.2
	Rated residual making and breaking capacity $I_{\Delta m}$	A	500( $I_n \leq 40A$ ) 630( $I_n > 40A$ )
	Rated short-circuit capacity $I_{cn}$	A	6000
	Break time under $I_{\Delta n}$	s	$\leq 0.1$
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50) $U_{imp}$	V	4000
	Dielectric test voltage at ind.Freq.for 1min	kV	2
	Insulation voltage $U_i$	V	500
	Pollution degree		3
Mechanical features	Electrical life	t	4000
	Mechanical life	t	10000
	Contact position indicator		Yes
Connection and Installation	Protection degree		IP20
	Connection capacity	mm <sup>2</sup>	1~35
	Circumstance temperature	°C	-25~+70
	Elevation	m	$\leq 2000$
	Pollution degree		3
	Terminal connection type		Cable/Pin-type busbar
	Installation Environment		No obvious vibration and shock
	Installation category		III
	Mounting		On DIN rail EN60715(35mm)by means of fast clip device
	Connection		From top

**Overall and mounting dimensions(mm)**

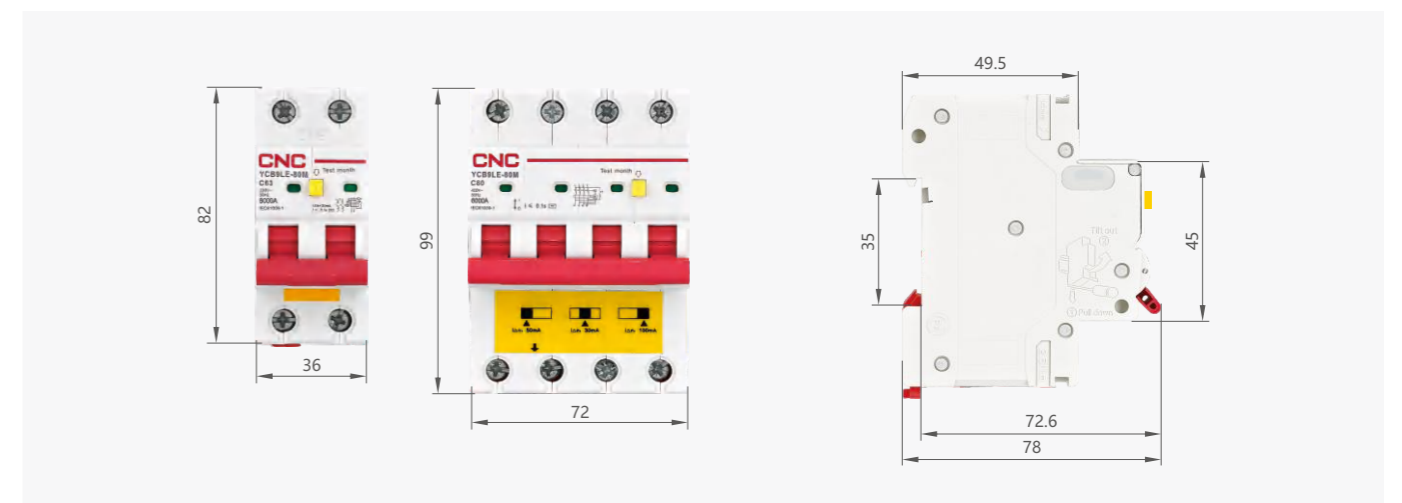

## YCB9RL-100 RCCB Electromagnetic

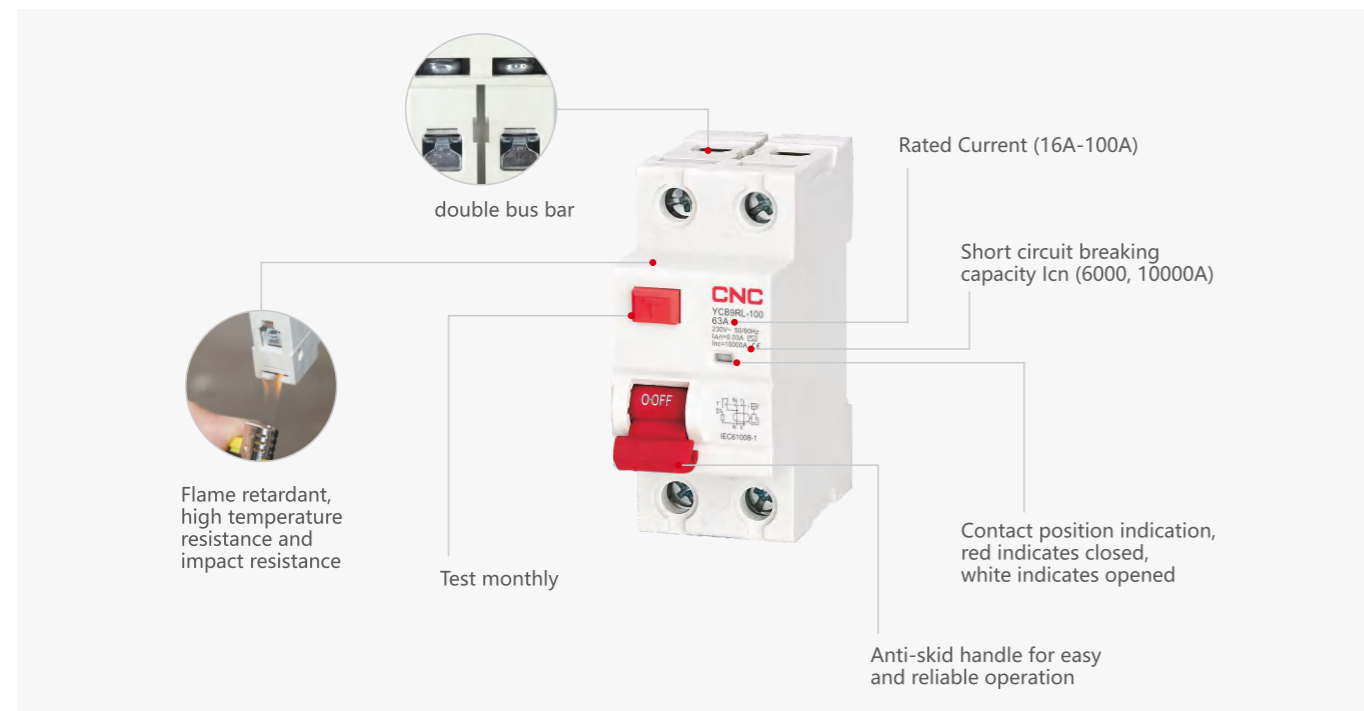


### General

1. Protection against the effects of sinusoidal alternating earth fault currents
2. Protection against indirect contacts and additional protection against direct contacts
3. Protection against fire hazard caused by insulation faults
4. Controlling and Switching
5. Used in residential building, non-residential building, energy sources, industry and infrastructure

### Selection

Type		Tripping sensitivity data	
AC	For residual sinusoidal alternating currents	30mA	For personnel, material and fire protection, as well as for protection against direct contact
A	For residual sinusoidal alternating currents and residual pulsating direct currents	100mA	For providing protection against indirect contacts
S	For selectivity, with time delay	300mA	For providing fire protection in case of insulation faults

### Wiring Diagram

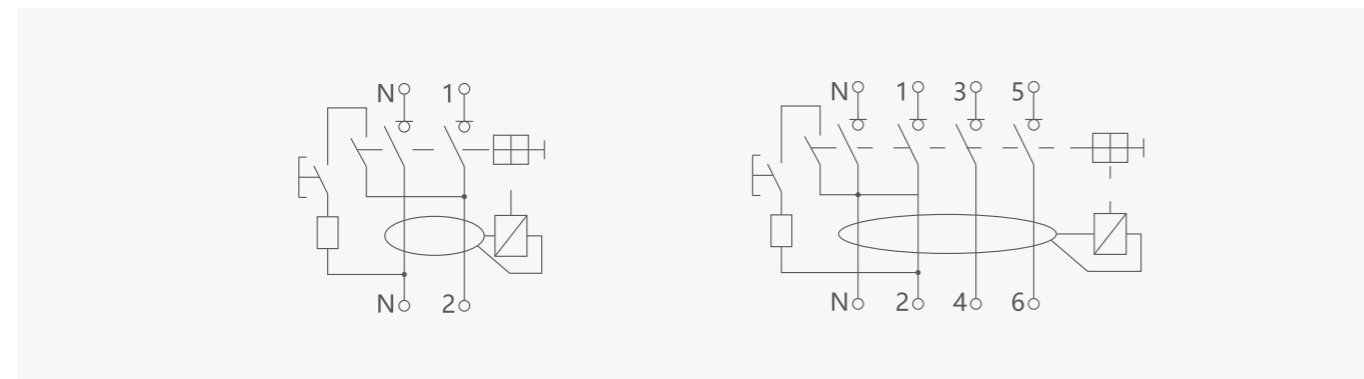


## YCB9RL-100 RCCB Electromagnetic


### Technical data

Type	Standard	IEC/EN 61008-1
Electrical features	Leakage type	Electromagnetic type
	Rated current In	A
	Type (wave form of the earth leakage sensed)	A, AC
	Poles	P
	Rated voltage Ue	V
	Insulation voltage Ui	V
	Rated frequency	Hz
	Rated breaking capacity Inc=IΔc	A
	Rated impulse withstand voltage (1.2/50) Uimp	V
	Dielectric test voltage at ind. Freq. for 1min	kV
	Rated sensitivity IΔn	A
	Rated residual making and breaking capacity IΔm	A
	Pollution degree	
Mechanical features	Electrical life	t
	Mechanical life	t
	Protection degree	
	Storage temperature	°C
	Ambient temperature (with daily average ≤35°C)	°C
Installation	Terminal connection type	
	Terminal size top / bottom for cable	mm <sup>2</sup>
		AWG
	Terminal size top / bottom for busbar	mm <sup>2</sup>
		AWG
	Tightening torque	N*m
		In-lbs
Mounting		
Connection		

### Overall and mounting dimensions(mm)

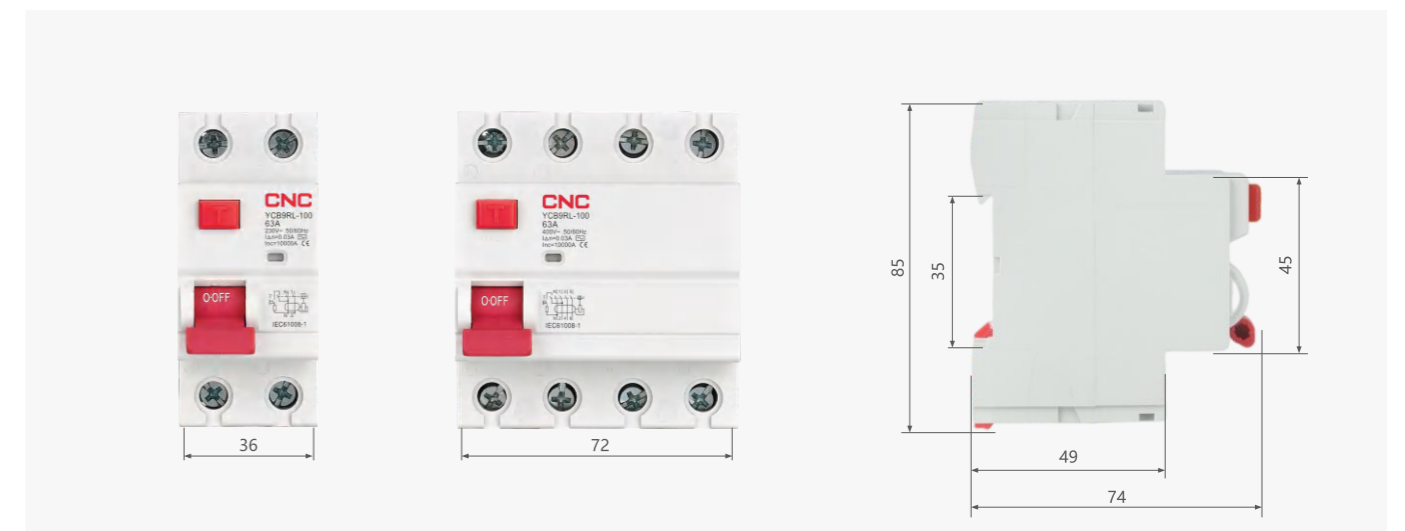


**Modular DIN Rail**  
**YCB9-125 MCB**

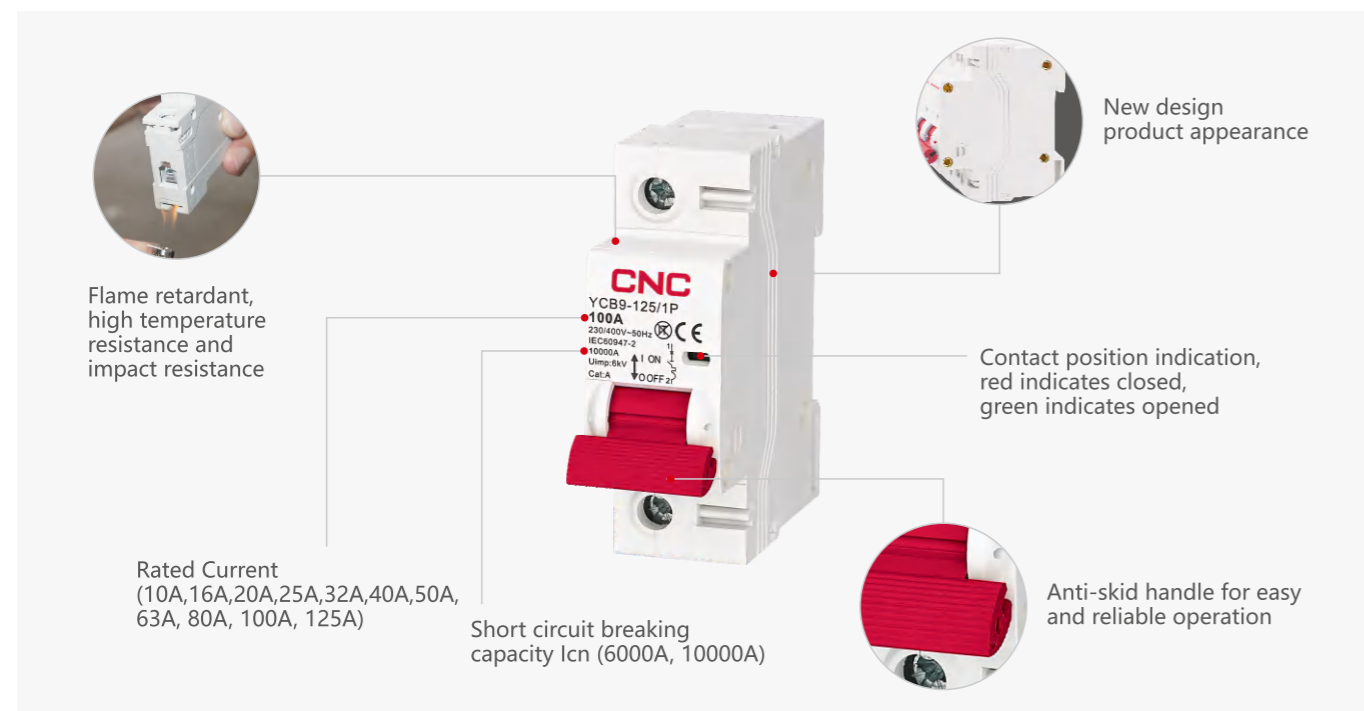

**General**

1. Overload protection
2. Short circuit protection
3. Controlling
4. Used in residential building, non-residential building, energy source industry and infrastructure

**Curve**

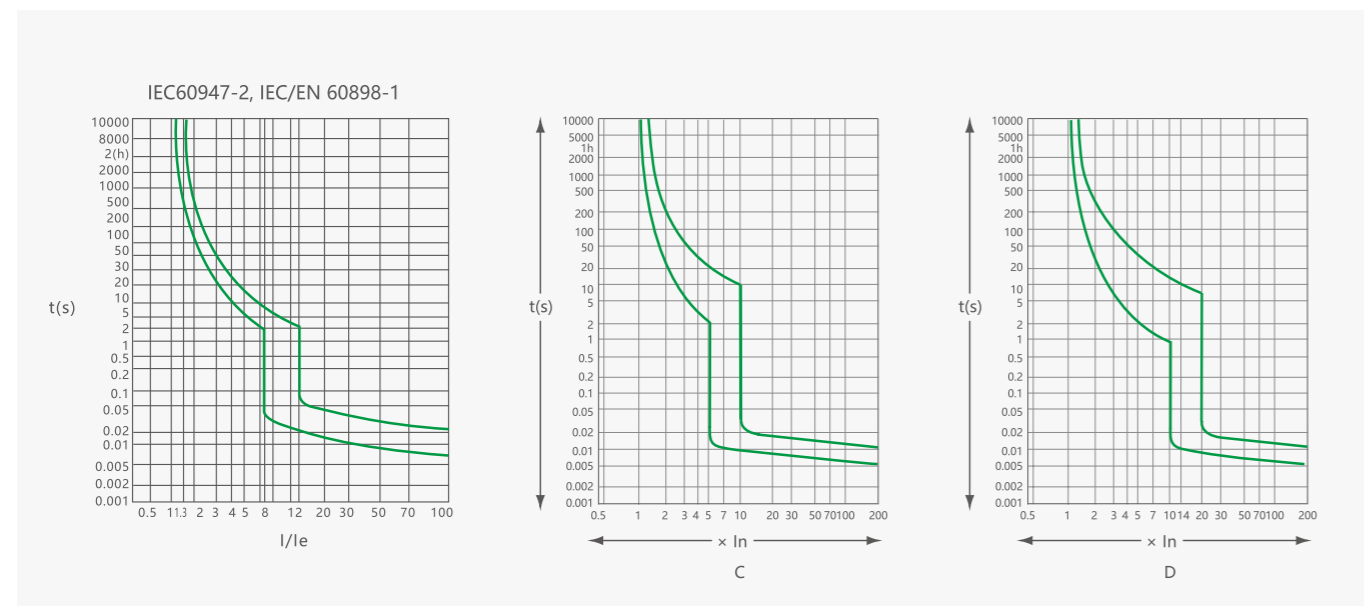


**Modular DIN Rail**  
**YCB9-125 MCB**

**Technical data**

Type	Standard	IEC60947-2	IEC/EN 60898-1	
Electrical features	Rated current In	A	10,16,20,25,32,40,50,63, 80, 100, 125	
	Poles	P	1, 2, 3, 4	
	Rated voltage Ue	V	230/400	
	Insulation voltage Ui	V	500	
	Rated frequency	Hz	50/60	
	Rated breaking capacity	A	6000	
	Rated impulse withstand voltage(1.2/50) Uimp	V	6000, 10000	
	Dielectric test voltage at ind. Freq. for 1min	kV	2.5	
	Pollution degree		3	
	Thermo-magnetic release characteristic		8-12In	C,D
Mechanical features	Electrical life	t	1500	
	Mechanical life	t	10000	
	Contact position indicator		Yes	
	Protection degree		IP20	
	Reference temperature for setting of thermal element		30	
	Ambient temperature (with daily average ≤35°C)	°C	-5~+40(Special application please refer to temperature compensation correction)	
	Storage temperature	°C	-25~+70	
Installation	Terminal connection type	°C	Cable/Pin-type busbar	
	Terminal size top / bottom for cable	mm <sup>2</sup>	50	
		AWG	18-1/0	
	Terminal size top / bottom for busbar	mm <sup>2</sup>	50	
		AWG	18-1/0	
	Tightening torque	N*m	3.5	
		In-lbs	31	
Mounting		On DIN rail EN60715(35mm)by means of fast clip		
Connection		From top or bottom		

**Overall and mounting dimensions(mm)**

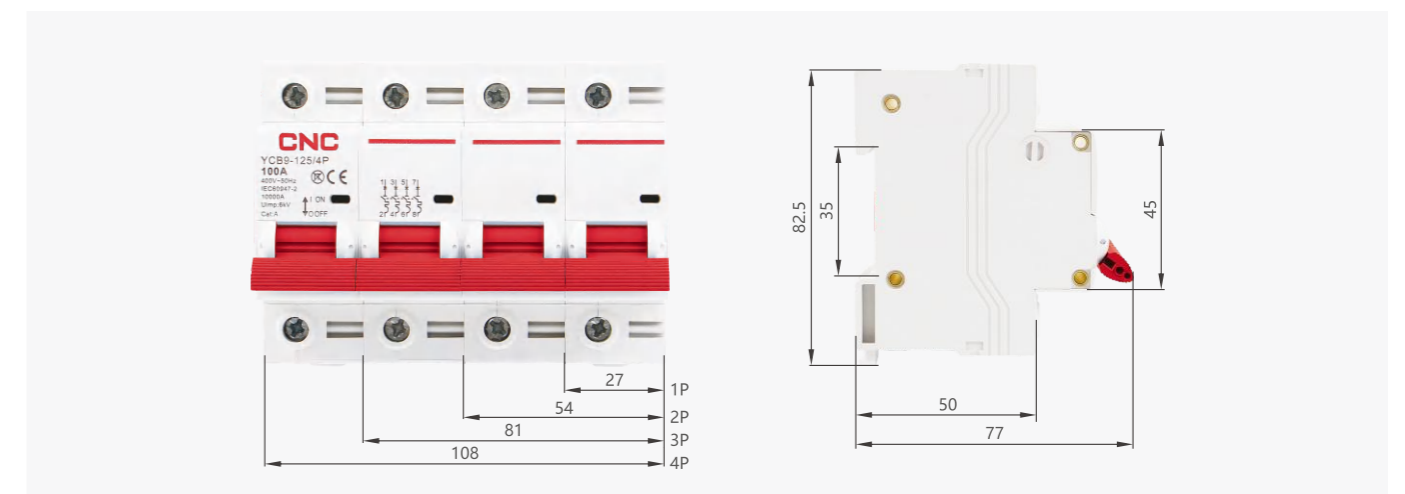



## Modular DIN Rail

### YCH9-40 Isolating Switch

#### General

YCH9-40 was designed according to IEC 60947-3. It meets the demand of loading and isolating the circuit, It is used as a main switch in distribution boxes in household applications or as a switch for individual electric circuits, easily to be assembled and work with the same series compact circuit breakers together.

Standard: IEC 60947-3

#### Features

1. Rated Current up to 40A
2. Only 9mm for 1P
3. Frameworks are 2P/4P
4. Compatible with customized busbar

#### Selection

YCH9	40	1M	25A
Model	Shell frame	Poles	Rated Current
Isolation switch (narrow type)	40	1M: 2-circuit 2M: 4-circuit	25A 40A


#### Technical data

Type	Standard		IEC/EN 60947-3	
Electrical features	Poles	P	2P, 4P	
	Rated voltage Ue	V	240/415	
	Rated current Ie	A	16, 20, 25, 32, 40	
	Rated frequency	Hz	50/60	
	Rated impulse withstand voltage Uimp	V	4000	
	Rated short-time withstand current Icw	A	480	
	Rated short circuit making capacity Icm	A	480	
	Pollution degree			3
Mechanical features	Insulation voltage Ui	V	500	
	Electrical life	t	1500	
	Mechanical life	t	8500	
	Protection degree		IP20	
	Ambient temperature (with daily average ≤ 35°C)	°C	-5 ~ +40	
	Mounting		On DIN rail EN 60715(35mm) by means of fast clip device	
	Terminal capacity	t	1-10mm <sup>2</sup>	
	Busbar specification	t	08-2.5mm	
			Terminal fastening torque	1.2N.m



## Modular DIN Rail

### YCH9-40 Isolating Switch

#### Overall and mounting dimensions(mm)

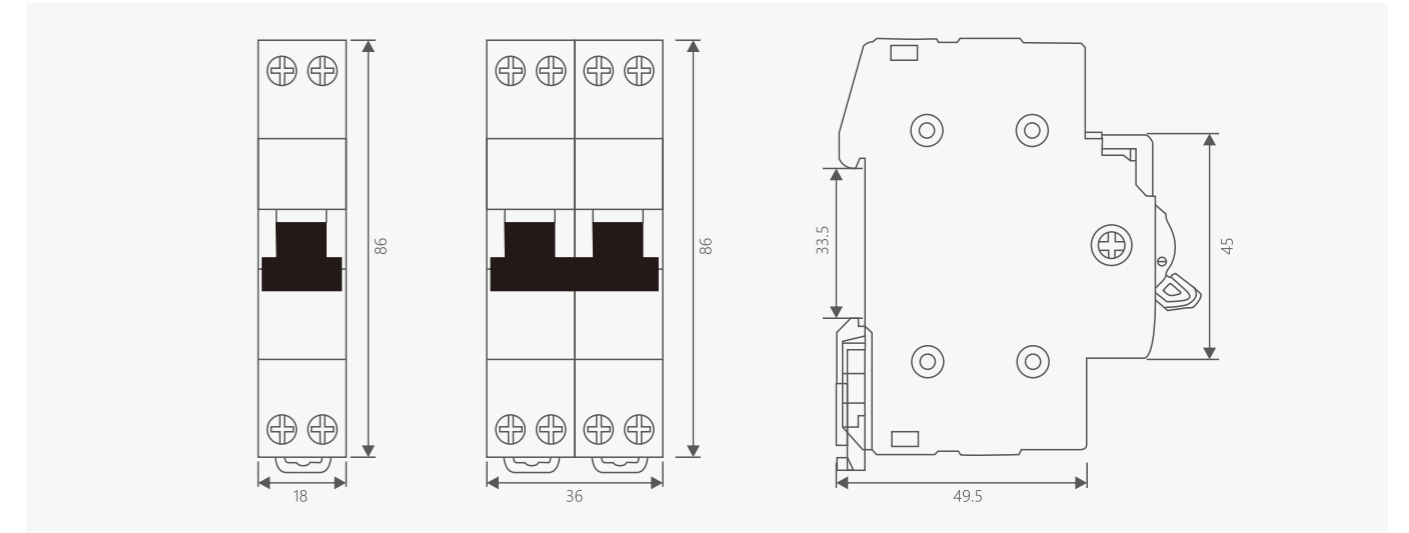


#### Wiring diagram

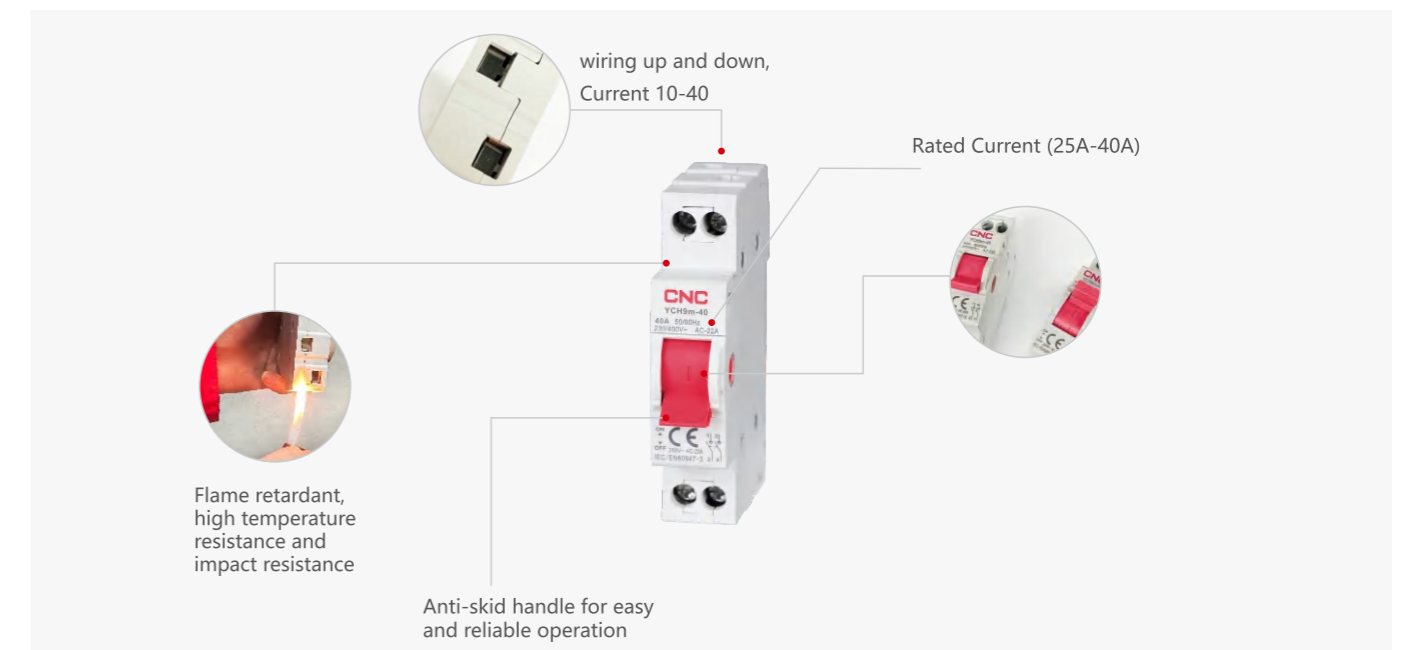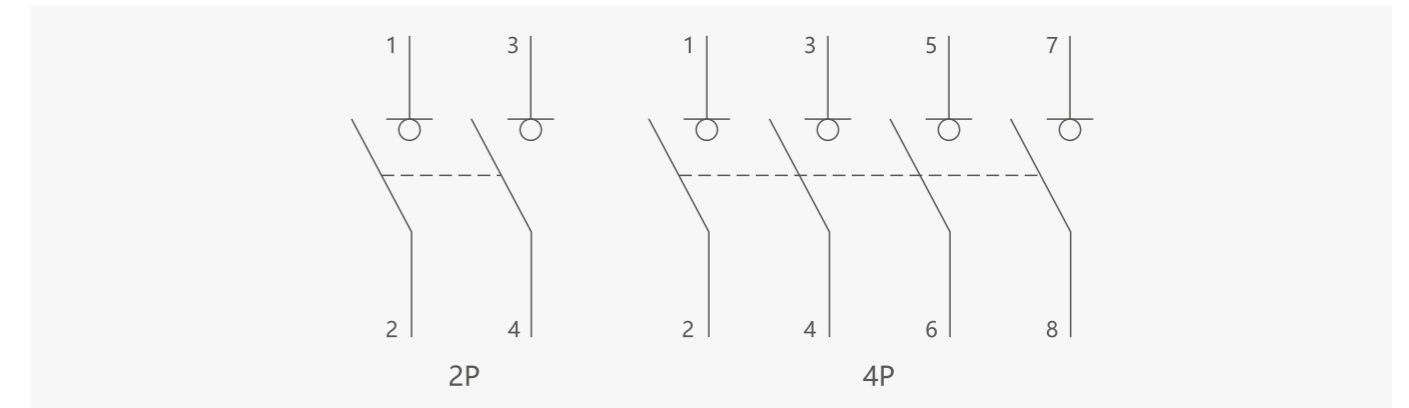

## Modular DIN Rail

### YCH9-125 Isolating Switch

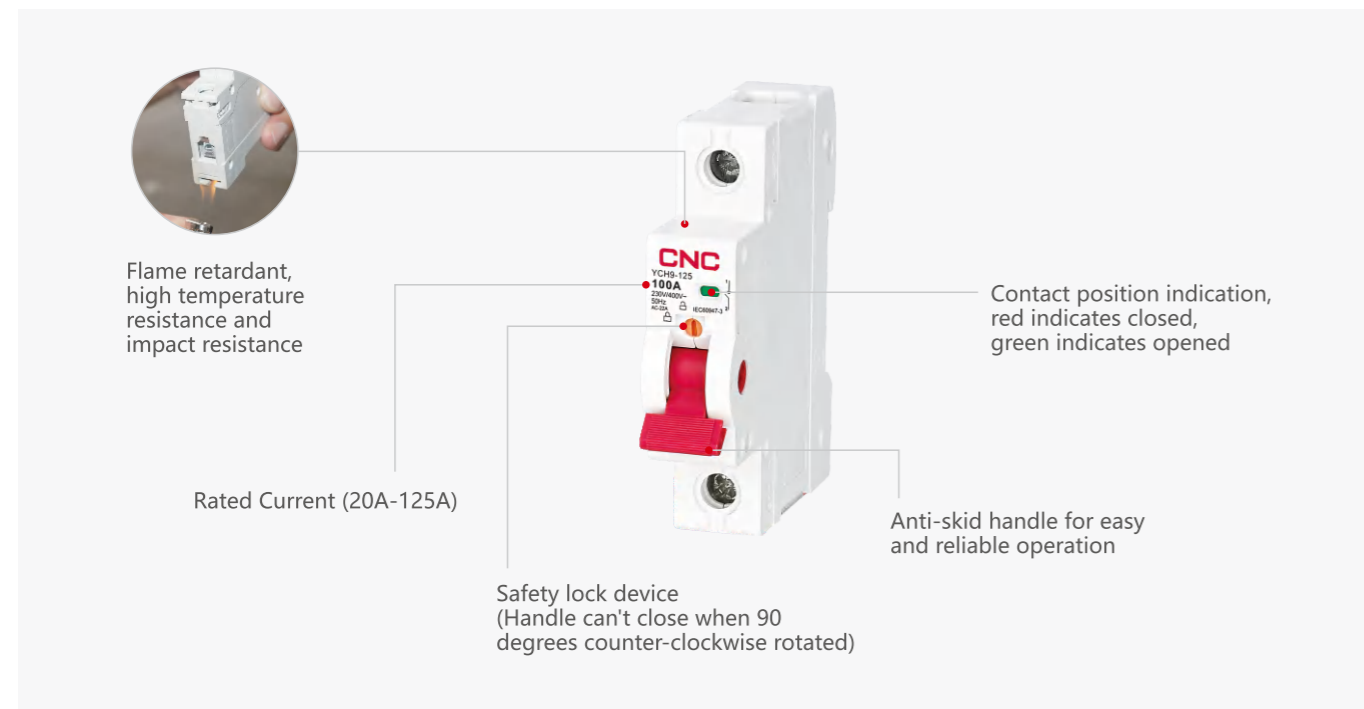

#### General

YCH9-125 series isolating switch is suitable in the resistive circuit of AC 50/60HZ, rated voltage 230/400V, rated current up to 125A. It's used primarily for circuit's turning on or off in non-load ed situation. And it functions on connection and isolation between lines and power, especially suitable to isolate power effectively and prevent circuit breaker from closing accidentally when maintain the circuit in order to ensure the safe operation of maintainer.

Product standard: IEC600947-3

#### Operating Conditions

1. Ambient Temperature: -25°C~+60°C
2. Altitude: Not higher than 2000m
3. Use Category: AC-22A
4. Installation Method: Embedded vertical standard rail mounting
5. Wiring Method: Clamp connection wire with screw, tightening torque 2.5N.m


## Modular DIN Rail

### YCH9-125 Isolating Switch

#### Technical data

Type	Standard		IEC/EN 60947-3
Electrical features	Poles	P	1, 2, 3, 4
	Rated voltage $U_e$	V	230/400
	Rated current $I_e$	A	20,32,40,63, 80,100,125
	Rated frequency	Hz	50/60
	Rated impulse withstand voltage(1.2/50)U <sub>imp</sub>	V	4000
	Rated short-time withstand current $I_{cw}$		12I <sub>e</sub> , 1s
	Rated making and breaking capacity		3I <sub>e</sub> , 1.05U <sub>e</sub> , cosΦ=0.65
	Rated short circuit making capacity		20I <sub>e</sub> , t=0.1s
	Dielectric test voltage at ind.Freq.for 1min	kV	2.5
	Insulation voltage $U_i$	V	500
Mechanical features	Pollution degree		2
	Electrical life	t	1500
	Mechanical life	t	8500
	Protection degree		IP20
Installation	Terminal size top/bottom for cable and pin-type busbar	mm <sup>2</sup>	50
		AWG	18-1/0

#### Overall and mounting dimensions(mm)

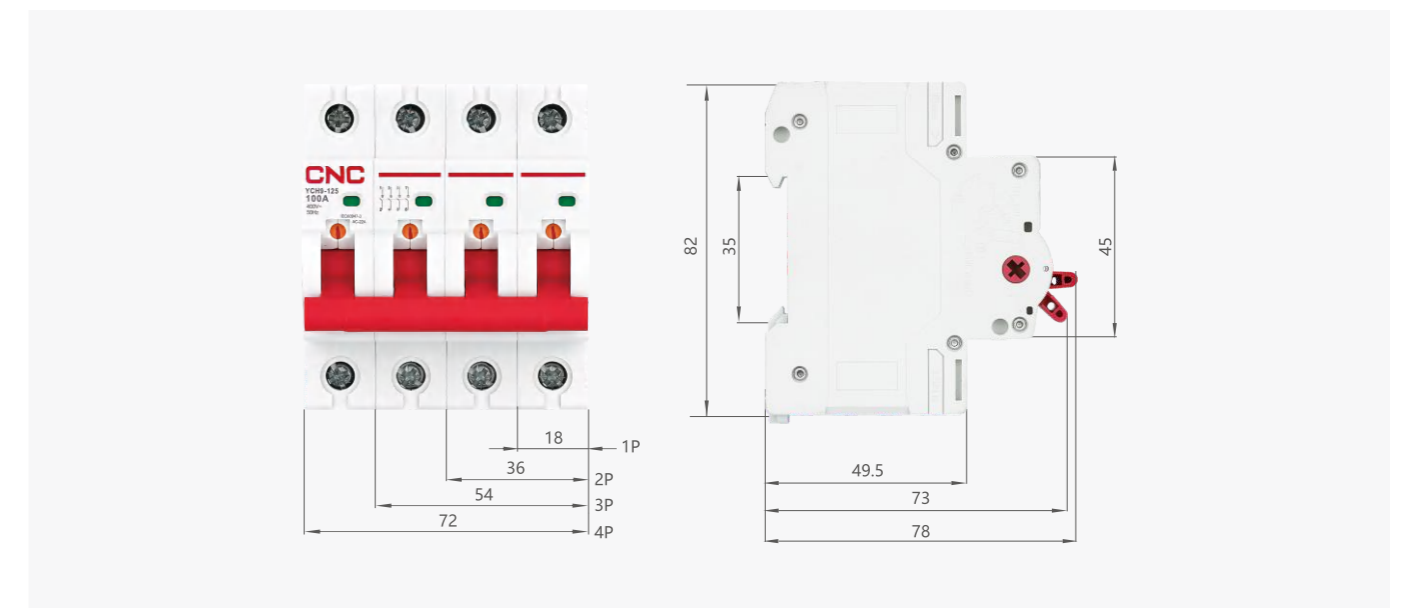

## Modular DIN Rail

### YCB9ZF-100AP,100W Smart circuit breaker

A



YCB9ZF-100W(WIFI)



YCB9ZF-100AP(WIFI)



YCB9ZF-100AP(4G)


#### General

- Data monitoring
- Fault alarm, protection
- Centralized management
- Analysis of energy consumption
- Portable barrier remover
- Handle dangerous situations anytime and anywhere
- Remote control
- Rights management
- The regional search
- Data report
- Remote location + diagnosis

#### Features

Comprehensively protect the safety of human electricity

- Local + remote integrated control + remote leakage self-check
- Operation record can be checked • Electrical fire factor monitoring
- Fault early warning • Fault location/fault alarm • Tripping protection
- Over undervoltage protection • Overload protection
- Over temperature protection • Open phase protection
- Voltage/current imbalance • Fault phase protection
- Preventing electricity-stolen • Maintenance and overhauls closed by mistake
- Current limit • Scene mode • Line timing • Rights management
- Automatic reclosing • Generate report analysis automatically
- Local + remote locking • The leakage protection current can be adjusted
- Custom warning thresholds • Short circuit protection • Power contrast
- Troubleshooting advice • Fault cause recording • Conditional linkage control
- Centralized management • Power factor calculation • Historical data import
- Electricity statistics • Chart simulation display • Status indication

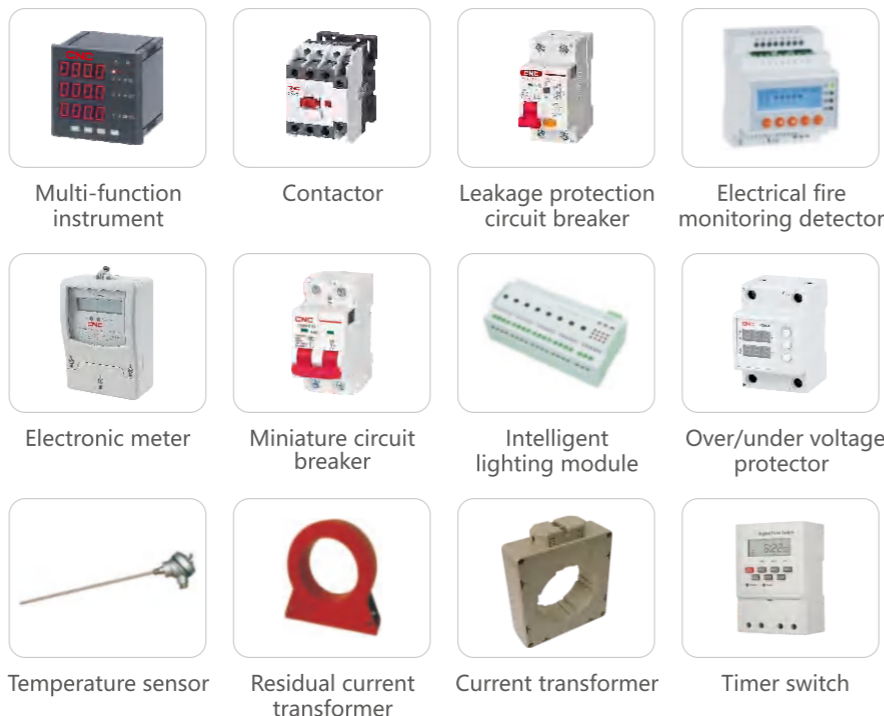


## Modular DIN Rail

### YCB9ZF-100AP,100W Smart Circuit Breaker

A



YCB9ZF-100AP(4G)

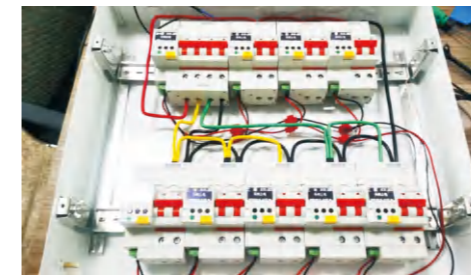

#### Functions

- OLED lattice LIQUID crystal display has long life and good low temperature performance;
- Can be set as a communication gateway, through the ontology 485 interface for the branch small current switch combination networking;
- Integrates multiple protection functions such as over voltage, under voltage, missing phase, wrong phase, loss of voltage, overload, short circuit, leakage, temperature, voltage/current imbalance, over power, under power, anti-power theft and so on into one, and supports early warning in accordance with the preset proportion;
- Multiple functions can be closed, alarm, trip any combination, more widely applicable;
- Support 12 months frozen electric energy and 7 days frozen electric energy query, let the remote energy management more convenient;
- Electric parameters such as active power, reactive power, apparent power and power factor are supported for collection and uploading;
- Support positive and negative energy statistics.
- RS485 in non-gateway mode supports DL/T-645/Modbus protocol and automatic conversion;
- Support external dry contact control, cabinet door control;
- Support multiple groups to timer control the closing and opening operation for more arbitrary controlling;
- Multi-component modular design, optional collocation, more flexible usage.
- Remote wireless communication technology, supporting 2G, 4G, Ethernet, wifi, Bluetooth, MQTT and other communication modes;
- Real-time reporting on operation event, alarm event and failure event ensures easier access to your equipment anytime anywhere. The alarm is accompanied by a buzzer prompt, and can be muted remotely or locally to make the device alarm more intelligently;
- Support multiple remote OTA upgrade methods to facilitate device upgrades. Maintenance is no longer troublesome;
- Hundreds of local event records (power on, power off) are stored, which can be checked at any time for accident cause analysis;
- The clock is timed and synchronized on the cloud to ensure the accuracy of event recording time. The daily error is no more than 1S in the case of no network;
- Real-time statistics of the number of events can focus on frequent abnormal, support switching display in Chinese and English;
- Support 12 months frozen electric energy and 7 days frozen electric energy query, let the remote energy management more convenient;
- Electric parameters such as active power, reactive power, apparent power and power factor are supported for collection and uploading;
- Support positive and negative energy statistics.



## YCB9ZF-100AP,100W Smart Circuit Breaker

A



YCB9ZF-100AP(4G)



YCB9ZF-100W(WIFI)

### Advantages

- Maintenance safety lock: greatly ensure the personal safety of maintenance personnel;
- Protection against electric theft cover plate: it can effectively prevent electric theft, private cable, etc.
- Independent power supply design: it can effectively prevent the whole system from being paralyzed and unable to work;
- 1.3 inch OLED display design: Provide more intuitive man-machine operation interface for maintenance personnel;
- modular design: optional collocation, more flexible use;
- High accuracy: voltage and current detection accuracy level 0.5, power accuracy level 1.0;
- The overall function of the circuit breaker saves the characteristics of the miniature circuit breaker;
- Flexible choice of communication mode, can also be used as a gateway;
- Flexible choice of function shutdown, alarm and tripping protection mode;
- A variety of upgrade methods to facilitate device upgrades.Maintenance is no longer troublesome;
- Power off protection design: After the power off of the main circuit, the data can be saved and uploaded without loss;
- Automatic judgment and analysis of the cause of the fault and operation events, display log, convenient for maintenance and troubleshooting;
- The functions of load imbalance, missing phase, wrong phase and over temperature protection greatly ensure the aging of equipment and lines, and the safety of electricity use;
- Timing switch function: guarantee the timing switch of equipment and energy consumption, as well as electricity saving;
- The leakage action protection is sensitive. Different leakage protection values can be set according to the usage environment.



### Usage

- This product RS485 is a standard configuration communication port. It can be connected to computers and various communication devices through RS485 to USB converter to realize information exchange and control;
- The default baud rate of the system is 9600bps. You can check and set the required Baud rate in the setting communication menu.
- You must insert SIM card before using for Network GPRS product, which can be connected to the server through GPRS or gateway, router for the exchange and control of network information;
- Real-time query and analysis of all kinds of electricity consumption data and view the history, statistics and settlement of electricity consumption on a monthly basis;
- The product installation must be carried out by professional electricians;
- Products can be customized according to user needs, contact the relevant technical personnel.

## YCB9ZF-100AP,100W Smart Circuit Breaker

A

### Technical data


Item	YCB9ZF-100AP(4G)	YCB9ZF-100W(WIFI)
Product		
Poles	1P+N,3P+N	1P,2P,3P,4P
Rated voltage	Single-phase AC230V, 50/60Hz; Three-phase AC440V, 50/60Hz	
Rated current	32A,63A, 100A	
Residual operating current	30-500mA	
Short circuit breaking capacity	Icn=Ics=6kA	
Mechanical life	More than 20000 times	
Electrical life	More than 6000 times	
Action time	Leakage action less than 100ms; Closing time is less than 1.5s and opening time is less than 1S	
Protection grade	IP20	
Operating environment temperature	-40 °C~70 °C	
Principle of action process	<p><b>Under normal condition of voltage leakage:</b></p> <p>If the device is in the state of breaking, the device will not close automatically, but can only close remotely by controlling the device end or manually by local operation. If the device is in the closing state, the device will not open automatically, but can only close remotely by controlling the device end or manually open by the device requires local manual operation.</p> <p><b>Under abnormal voltage leakage:</b></p> <p>If the equipment is in the closing state, the equipment will automatically open, and voltage is changed to normal. If the leakage self-check is not normal, the equipment will continue to open automatically once. After troubleshooting, manually operate locally or remotely control the closing. If the device is in the opening state at this time, the device will not close automatically. After the voltage returns to normal, the device needs to be manually and locally operated or remotely controlled to close.</p>	
Remove lock	After manual on-site troubleshooting, remove the safety lock, push back the safety lock lever, and try to manually operate the closing and opening button once. Is the closing successful? If the closing is not successful, check whether the equipment is in arrears or other circumstances to perform the opening;	
Safety lock	After manual on-site troubleshooting, remove the safety lock, push back the safety lock lever, and try to manually operate the closing and opening button once. Is the closing successful? When the safety lock lever is not pulled out, the equipment is in operation mode: when the safety lock is pulled out, the equipment is in maintenance mode and can be repaired only after padlock is needed. The safety lock and the mechanical structure of the circuit breaker can not be closed even if manually or remotely controlled, so as to ensure the personal safety of the maintenance personnel.	



## Modular DIN Rail

### YCB9ZF-100AP,100W Smart Circuit Breaker


#### Technical data

Item	Data
YCB9ZF-100AP	
Thermo-magnetic release characteristic	C type (Other types can be customized)
Rated current In	32A,63A,100A
Rated short-circuit capacity Icn	6kA
Short-circuit protection	When there is short circuit fault, it can trip within 100ms
Leakage protection	When there is leakage fault, it can trip within 100ms
Leakage protection value	30~500mA can be set freely
The leakage self-inspection	According to the actual use, can set the day, hour and minute
Over and under voltage protection	When there is over or under voltage fault, it can trip after 3s(0~99s can be set); over-voltage set value:250~320V; under-voltage set value:100~200V
On-delay	When there is power, the switch will be automatically closed,0~99s can be set
Rated current setting	1A~1In
Overload delay protection	0~99s can be set
Over temperature protection	0~120°C can be set, OFF-delay time 0~99s can be set
Under power	The amount of load change can be set, OFF-delay time 0~99s can be set
Over power	The amount of load change can be set, OFF-delay time 0~99s can be set
Power limit	Reach limit power, OFF-delay time 3s,(0~99s can be set)
Timing control	5 groups of time can be set
Imbalance	Percentage can be set for both voltage and current, OFF-delay time 0~99s can be set
Record	Locally queried 680 switch event logs
Display	Chinese and English Menu
Operation times	Record various operation times of circuit breaker to determine whether the circuit breaker is within its effective life
Maintain	Set self check, device reset, power reset, record reset, synchronize clock, restart device, restore system default, etc
Check	Local view of voltage, current, leakage current, temperature, active power, reactive power, apparent power, power factor, cumulative electricity, daily electricity (view 7-day record)
Manual automatic integrated control	Mobile phone APP or PC control, can be controlled by the button, can also be controlled through the handle
Cover plate, pull rod	It has the function of preventing electricity-stolen, maintenance and overhauls closed by mistake.
Communication mode	RS485 standard; 4G,WIFI,NB,RJ45 optional
Remote Software Upgrade	According to the actual situation, customized procedures to achieve remote update and upgrade
The following functions can be set to open, close, alarm or trip functions	overvoltage protection, undervoltage protection, overload protection, automatic closing, power off protection, remote control, open cover protection, under load protection, over power protection, under power protection, early warning function, timing self - check, warning allowed,gear return, high temperature protection, timing control, open phase protection, fault phase protection, voltage imbalance, current imbalance

## Modular DIN Rail


### YCB9ZF-100AP,100W Smart Circuit Breaker

#### Technical data

Item	Data
YCB9ZF-100W	
Thermo-magnetic release characteristic	C type (Other types can be customized)
Rated current In	16A,20A,25A,32A,40A,50A,63A,80A,100A
Rated short-circuit capacity Icn	6kA
Short-circuit protection	When there is short circuit fault, it can trip within 100ms
Over and under voltage protection	When there is over or under voltage fault, it can trip after 3s(0~99s can be set); Percentage can be set for over and under voltage
Overload delay protection	according to rated current, meet standard IEC 60898-1 requirement
Timing control	Set according to requirements
Check	The voltage and switching status can be checked through the APP on the phone
Manual automatic integrated control	Mobile phone APP control, can also be controlled through the handle
Communication mode	Wireless WIFI

#### Overall and mounting dimensions(mm)


##### YCB9ZF-100AP

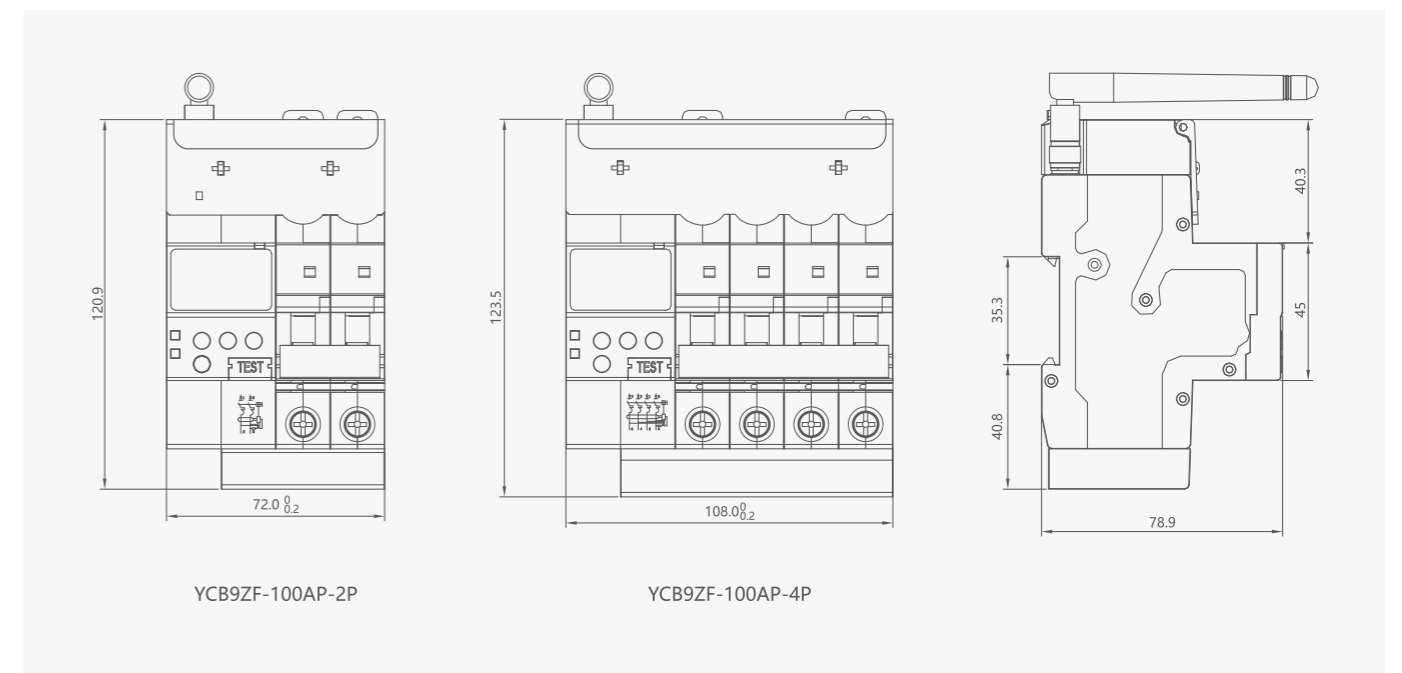

## Modular DIN Rail

### YCB9ZF-100AP,100W Smart Circuit Breaker

YCB9ZF-100W-4P

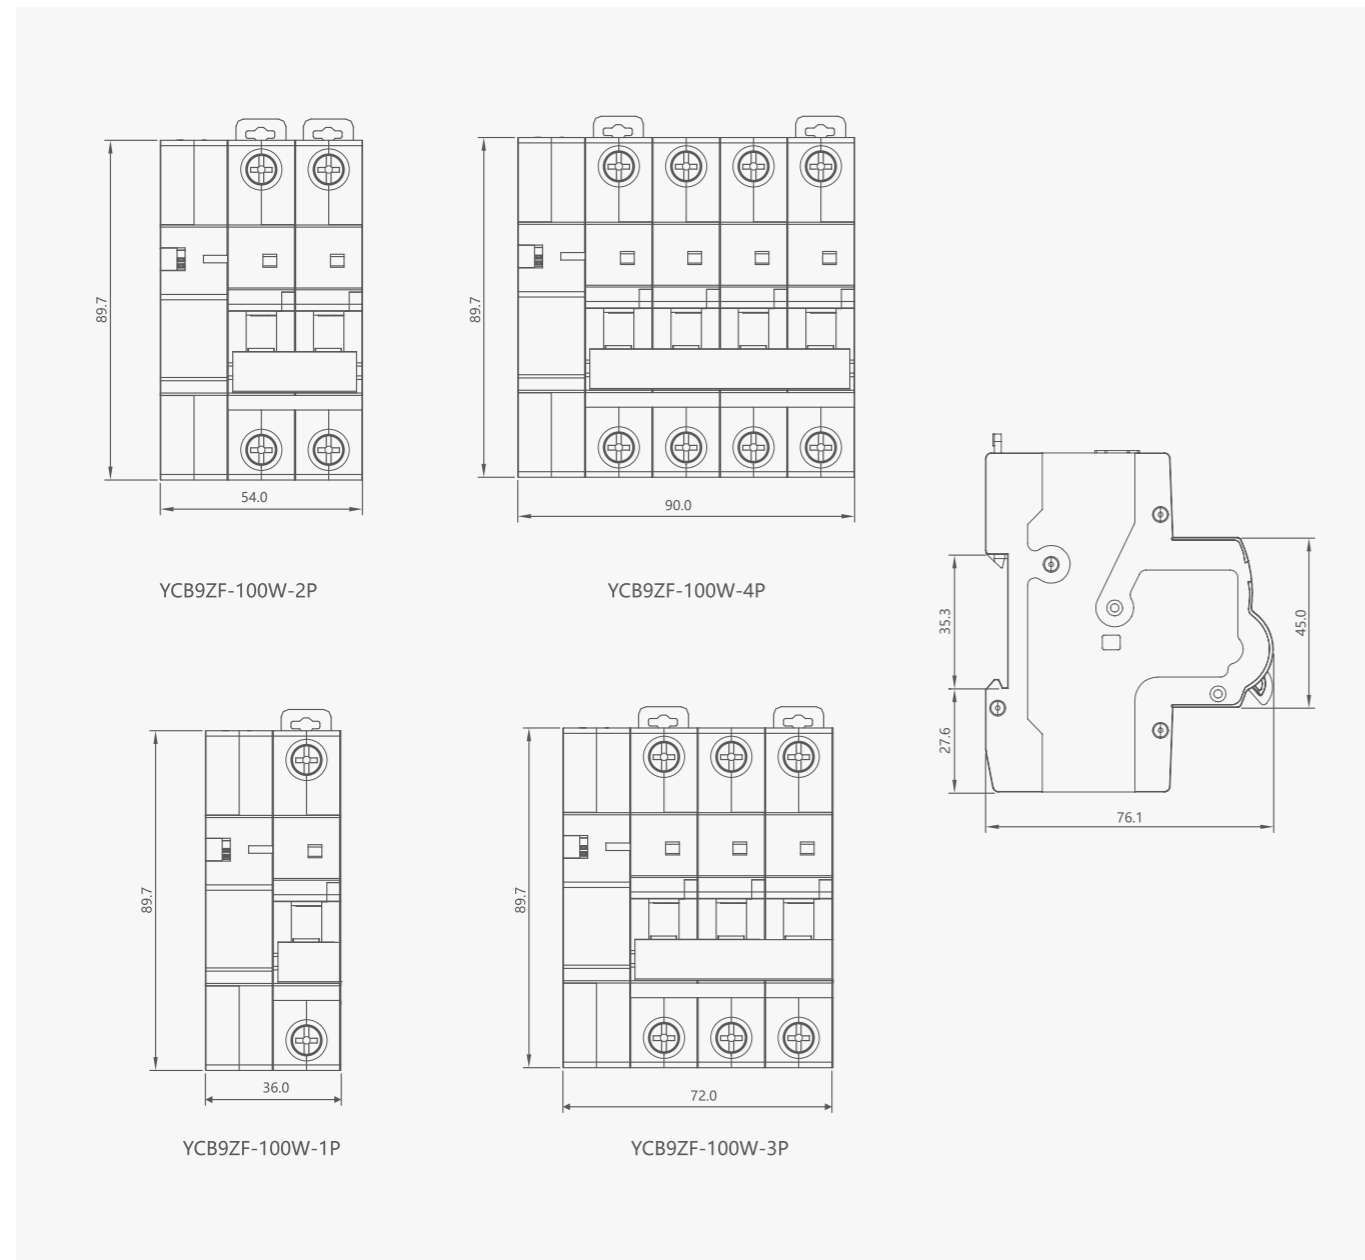

## Modular DIN Rail

### YCSi Smart Circuit Breaker



#### General

The intelligent remote control switch is suitable for users or loads with AC50Hz/60Hz, rated operating voltage of 230V, and rated working current of 63A and below. It has a beautiful appearance, excellent performance, and reliable operation. It can quickly switch on/off and is installed with modular rail. It is mainly used in homes, shopping malls, office buildings, hotels, schools, hospitals, villas, and other places.

#### Selection

YCSi	L	40	W	J	P	1P+N	16A
Model	Protection function	Shell frame	Communication	Functions	Version	Number of poles	Rated current
Smart switch	/: No L: With leakage protection	40 63	W: WiFi Z: ZigBee	/: No J: Metering	/: General P: Plus	1P+N 2P	40A 63A

Note: 40 frame is with no leakage protection The Plus enhanced version has adjustable functions for current, overvoltage, temperature, undervoltage, and leakage values

#### Features

- Auto-closing: The product can automatically close the circuit when power is supplied during normal operation on the line, and can also be set to not close the circuit when power is supplied.
- Remote control: mobile phone APP or computer remote control opening/closing.
- Real-time feedback: real-time feedback of product opening/closing status.
- Timing: Timing, delay opening/closing.
- Sharing control: can share control with multiple people.
- Residual current protection: When the leakage current exceeds the set value or personal electric shock (with leakage protection), the protector automatically disconnects within 0.1s.
- With metering function: can display voltage, current, power, and electricity.

## Modular DIN Rail

### YCSi Smart Circuit Breaker


#### Technical data

Rated working voltage	AC230V
Rated current In	1-40A/1-63A
Life	Electrical life 100000 on/off times
Local power consumption	<3W
Working voltage range	AC110V-280V
Maximum rated output current	40A/63A
Wiring	Using clamp terminals, the cross-sectional area of the wire can reach 16mm
Installation	Installed on a standard TH35 rail
RS485 communication	Baud rate: 9600; communication address range: 1-247

#### Working environmen

Ambient air temperature	-5°C~+40°C, the average value within 24 hours does not exceed +35°C
Limiting service temperature	-25°C~+70°C
Altitude	The altitude of the installation site does not exceed 2000 meters
Humidity	a. When the ambient air temperature is +40°C, the relative humidity of the air should not exceed 50%, and there can be a higher relative humidity at a lower temperature. b. When the monthly average minimum temperature of the wettest month is 25°C, the monthly average relative humidity is 90%. c. Condensation on the product surface due to temperature changes has been taken into account.
Pollution degree	Level 2
Installation Category	Class II and III

#### Overall and mounting dimensions(mm)

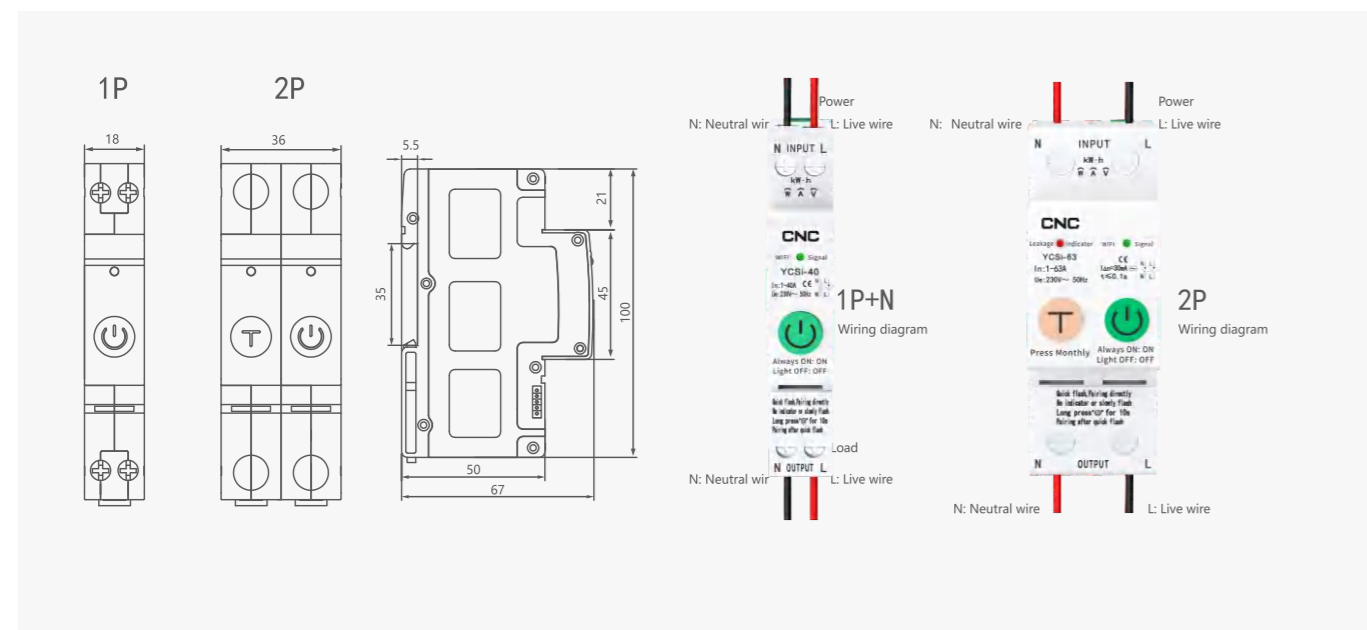

## Modular DIN Rail

### YCWF-Y02 WIFI Smart Switch Controller



#### General

YCWF series WiFi intelligent switch controller, whose shell is made of PC flame retardant material, which is safer to use ; The maximum load of 230V/2A can be extended to 125A through the contactor, using standard WiFi : 2.4GHz b/g/n.

#### functions:


Support smart configuration for fast networking; Support multiple control types: switch, timer switch, cycle control, etc.; Support WLAN local control and remote control; Access to mainstream voice-activated assistants such as Google, Alexa, Tmall Genie, DuerOS, Xiao Ai, etc, Voice-activated smart device sharing and cloud account device sharing function;APP support Android and iOS systems;

#### Application:

Home control system  
Building automation  
Industrial control system  
Medical and electrical equipment

#### Used with YCCH6 series contactor

1. First, you need to use the hook at the lower right side of the WiFi controller
- 2.Then install conductive connectors at NO(A1) and N (A2).

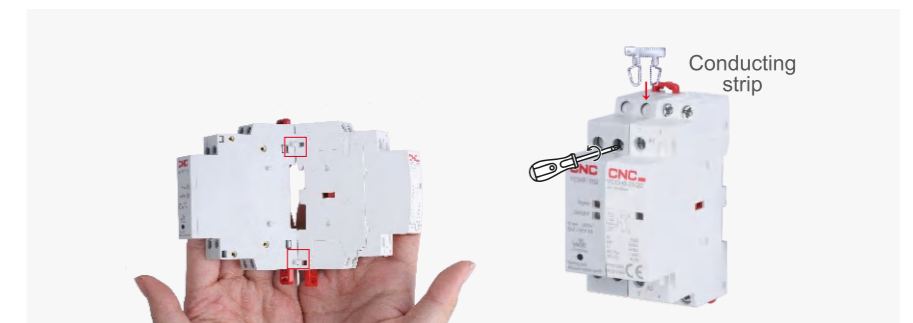

#### User Guide

- 1.Search for ' Tuya ' to download and install Tuya APP
- 2.Allow all permissions during installation.
- 3.Register an account and login.



YCWF-Y02 WIFI Smart Switch Controller

Technical Data

		YCWF	
WiFi Characteristic	Standard	IEEE 802.11b/g/n	
	Working Mode	STA/AP/STA+AP	
	IEC/EN 60947-1, IEC/EN 60947-4-1, IEC/EN 60947-5-1		
		CE	
Enclosure protection degree	IP20		
Ambient temperature	Operation temperature limits: -35 °C~+70 °C Normal operation temperature range: -5 °C~+40 °C. The 24-hour average temperature should not exceed +35 °C. For use beyond the normal operation temperature range.		
Altitude	Not exceeding 2000 m above sea level		
Atmospheric conditions	The relative humidity should not exceed 50% at the upper temperature limit of +70°C. A higher relative humidity is allowed at a lower temperature, e.g. 90% at +20 °C. Special precautions should be taken against occasional condensation due to humidity variations.		
Installation conditions	The angle between the installation surface and the vertical surface should not exceed ±5°.		

AC 1modules

Model	Rated current(In)		Control voltage (V AC)(50Hz)	Circuit diagram
	AC-7a AC-1	AC-7b AC-3		
YCWF+YCCH6-16/20	16A	6A	24/110/230	A1 1 3
YCWF+YCCH6-20/20	20A	7A		A2 2 4
YCWF+YCCH6-25/20	25A	9A	24/110/230	A1 R1 R3
YCWF+YCCH6-16/02	16A	6A		A2 R2 R4
YCWF+YCCH6-20/02	20A	7A		
YCWF+YCCH6-25/02	25A	9A		

AC 2modules

Model	Rated current(In)		Control voltage (V AC)(50Hz)	Circuit diagram
	AC-7a AC-1	AC-7b AC-3		
YCWF+YCCH6-40/20	40A	18A	24/110/230	A1 1 3
YCWF+YCCH6-63/20	63A	25A		A2 2 4
YCWF+YCCH6-40/02	40A	18A	24/110/230	A1 R1 R3
YCWF+YCCH6-63/02	63A	25A		A2 R2 R4



YCWF+YCCH6-25/20



YCWF+YCCH6-63/20

YCWF-Y02 WIFI Smart Switch Controller

AC 2modules

Model	Rated current(In)		Control voltage (V AC)(50Hz)	Circuit diagram
	AC-7a AC-1	AC-7b AC-3		
YCWF+YCCH6-16/40	16A	6A	24/110/230/380	A1 1 3 5 7
YCWF+YCCH6-20/40	20A	7A		A2 2 4 6 9
YCWF+YCCH6-25/40	25A	9A		
YCWF+YCCH6-16/04	16A	6A	24/110/230/380	A1 R1 R3 R5 R7
YCWF+YCCH6-20/04	20A	7A		A2 R2 R4 R6 R8
YCWF+YCCH6-25/04	25A	9A		

AC 3modules

Model	Rated current(In)		Control voltage (V AC)(50Hz)	Circuit diagram
	AC-7a AC-1	AC-7b AC-3		
YCWF+YCCH6-40/40	40A	18A	24/110/230/380	A1 1 3 5 7
YCWF+YCCH6-63/40	63A	25A		A2 2 4 6 8
YCWF+YCCH6-40/04	40A	18A	24/110/230/380	A1 R1 R3 R5 R7
YCWF+YCCH6-63/04	63A	25A		A2 R2 R4 R6 R8

AC 3modules

Model	Rated current(In)		Control voltage (V AC)(50Hz)	Circuit diagram
	AC-7a AC-1	AC-7b AC-3		
YCWF+YCCH6-100/20	100A	40A	24/110/230	A1 1 3
				A2 2 4
YCWF+YCCH6-100/11	100A	40A	24/110/230	A1 R1 1
				A2 R2 2
YCWF+YCCH6-100/02	100A	40A	24/110/230	A1 R1 R3
				A2 R2 R4



YCWF+YCCH6-25/40



YCWF+YCCH6-63/40






YCWF+YCCH6-100/20




Modular DIN Rail

**YCWF-Y02 WIFI Smart Witch Controller**

Overall and mounting dimensions(mm)

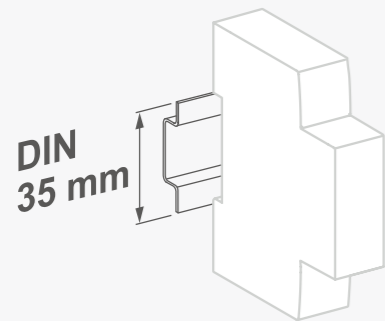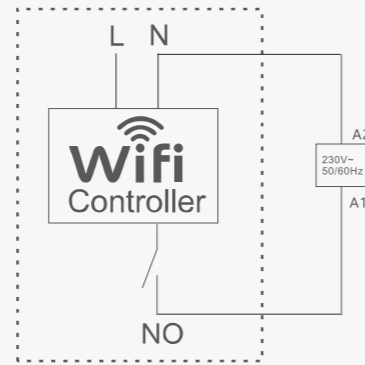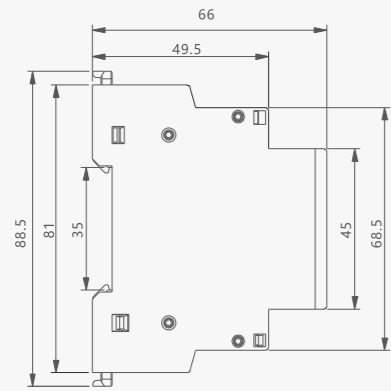

Installed on 35mm standard guide rail



±30°vertical

Modular DIN Rail

**YCBZ-40 Changeover Switch**

General


The Changeover Switch can switch on, load and break the circuit under normal conditions, using as Switch Disconnectors.

Standard: IEC 60947-3


Technical data

Parameter	Data
Rated Voltage	240/415V~
Rated Current	16,25,32,40A
Rated Frequency	50/60Hz
Number of Poles	1,2,3,4P
Contact form	1-0-2
Electrical Life	1500 Cycles
Mechanical Life	8500 Cycles
Protection degree	Ip20
Ambient Temperature	-5°C~40°C
Terminal/Cable size	10mm <sup>2</sup>
Mounting	On DIN rail EN60715(35mm) by means of fast clip device

Wiring diagram

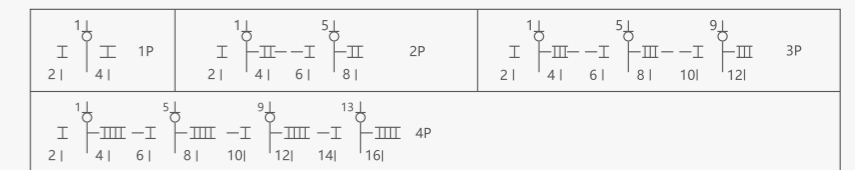

Overall and mounting dimensions(mm)

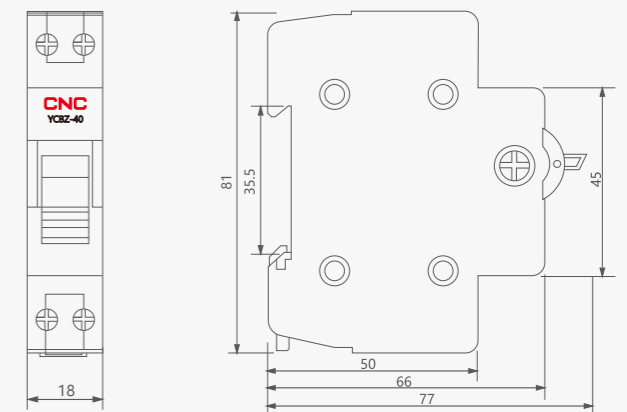

## YCBZ-63 Changeover Switch

A



### General

The Changeover Switch can switch on, load and break the circuit under normal conditions, using as Switch Disconnectors.

Standard: IEC 60947-3


### Technical data

Parameter	Data
Rated Voltage	240/415V~
Rated Current	16,25,32,40,50,63
Rated Frequency	50/60Hz
Number of Poles	1P,2P,3P,4P
Contact form	1-0-2
Electrical Life	1500 Cycles
Mechanical Life	8500 Cycles
Protection degree	Ip20
Ambient Temperature	-5°C~40°C
Terminal/Cable size	16mm <sup>2</sup>
Mounting	On DIN rail EN60715(35mm) by means of fast clip device

### Wiring diagram



### Overall and mounting dimensions(mm)

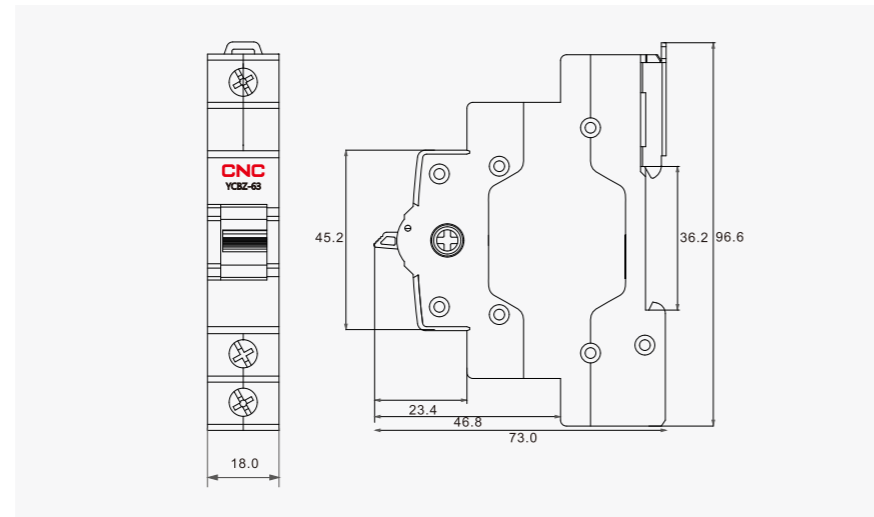

## YCBZ-125 Changeover Switch

A



### General


The Changeover Switch can switch on, Load and break the circuit under normal conditions, using as Switch Disconnectors.

Standard: IEC 60947-3


### Technical data

Parameter	Data
Rated Voltage	240/415V~
Rated Current	63,80,100,125
Rated Frequency	50/60Hz
Number of Poles	1,2,3,4P
Contact form	1-0-2
Electrical Life	1500 Cycles
Mechanical Life	8500 Cycles
Protection degree	Ip20
Ambient Temperature	-5°C~40°C
Terminal/Cable size	50mm <sup>2</sup>
Mounting	On DIN rail EN60715(35mm) by means of fast clip device

### Wiring diagram

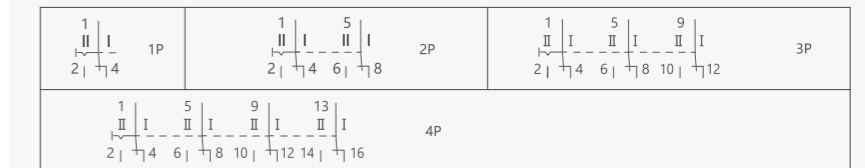

### Overall and mounting dimensions(mm)

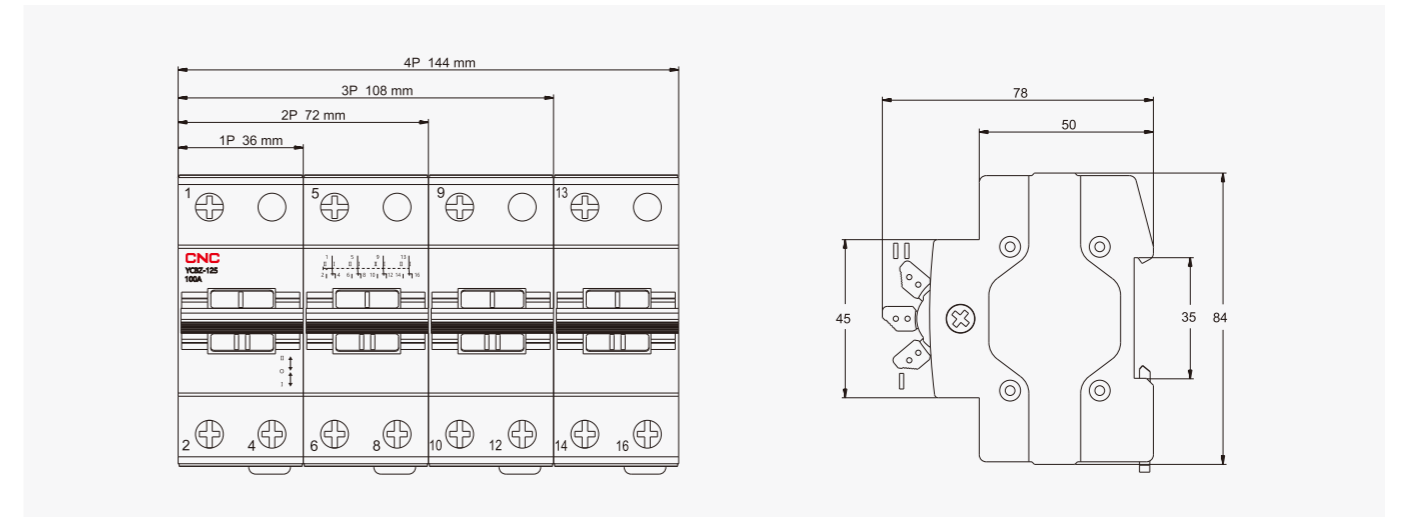

**Modular DIN Rail**  
**ADM Indicator**

A



ADM-1



ADM-2



ADM-3


**General**

The Modular Signal Lamp is applicable to circuit with rated voltage 230V~and frequency 50/60Hz for visual indication and signaling.  
Construction and Feature: Low service duration,minimum power consumption, Compact design with modular size, easy installation.  
Standard: IEC 60947-5-1


**Technical data**

Parameter	Data
Rated voltage	230V AC, 100V AC,48V (AC/DC), 24V (AC/DC)
Rated frequency	50/60Hz
Colour	ADM-1 ADM-2 Red, green, yellow,Blue ADM-3 Red/ Green/Yellow, Red/ Green/Blue
Connection terminal	Pillar terminal with clamp
Connection capacity	Rigid conductor 1.5mm <sup>2</sup>
Installation	On symmetrical DIN rail 35mm
Max power	0.6W
Illumination	LED
Service duration	30000 hours

**Wiring diagram**

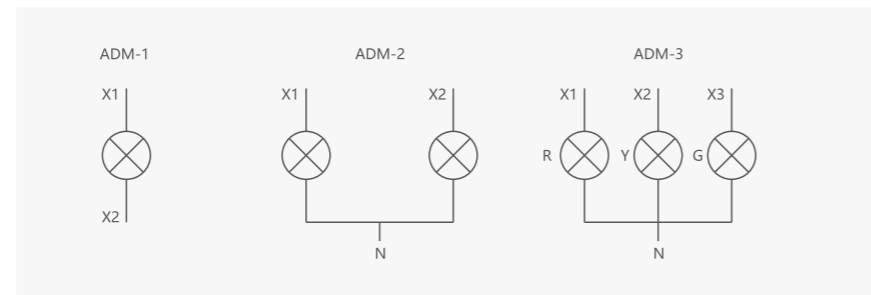

**Overall and mounting dimensions(mm)**

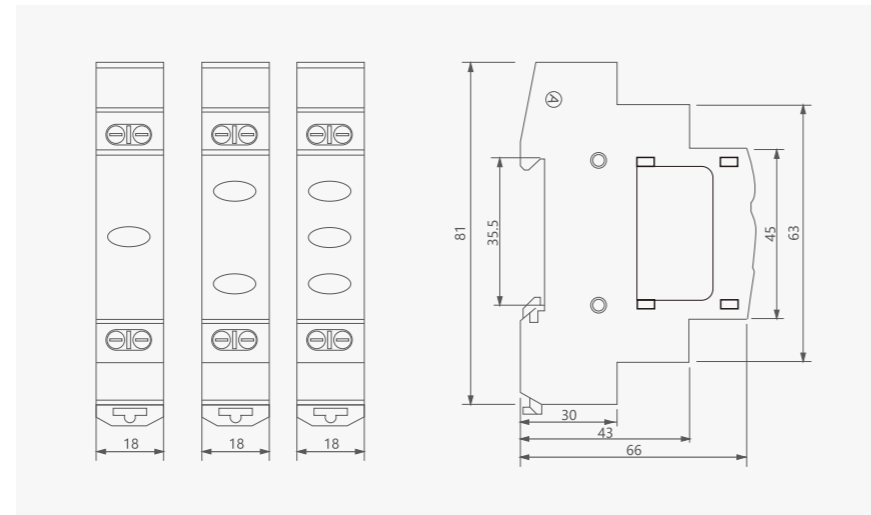

**Modular DIN Rail**  
**YCD9 Indicator**

A



YCD9-1



YCD9-2



YCD9-3


**General**

The Signal Lamp is applicable to circuit with rated voltage 230V~and frequency 50/60Hz for visual indication and signaling.  
Construction and Feature: Low service duration,minimum power consumption, compact design in modular size,easy installation.  
Standard: IEC 60947-5-1


**Technical data**

Parameter	Data
Rated voltage	230V
Rated current	0.5A
Rated frequency	50/60Hz
Colour	YCD9-1 Red, green, yellow ,YCD9-2,YCD9-3
Connection capacity	Rigid conductor 1.5mm <sup>2</sup>
Installation	On symmetrical DIN rail 35mm

**Wiring diagram**

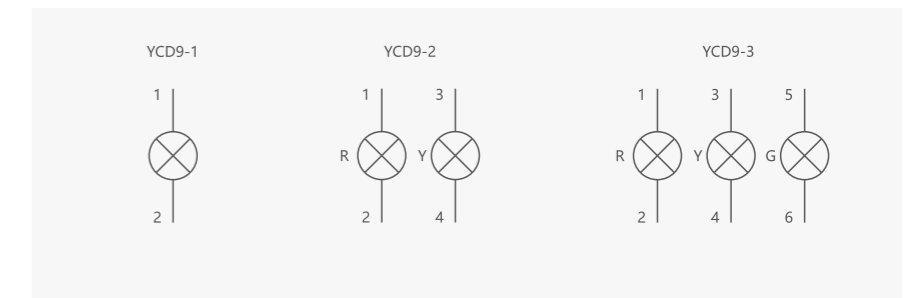

**Overall and mounting dimensions(mm)**

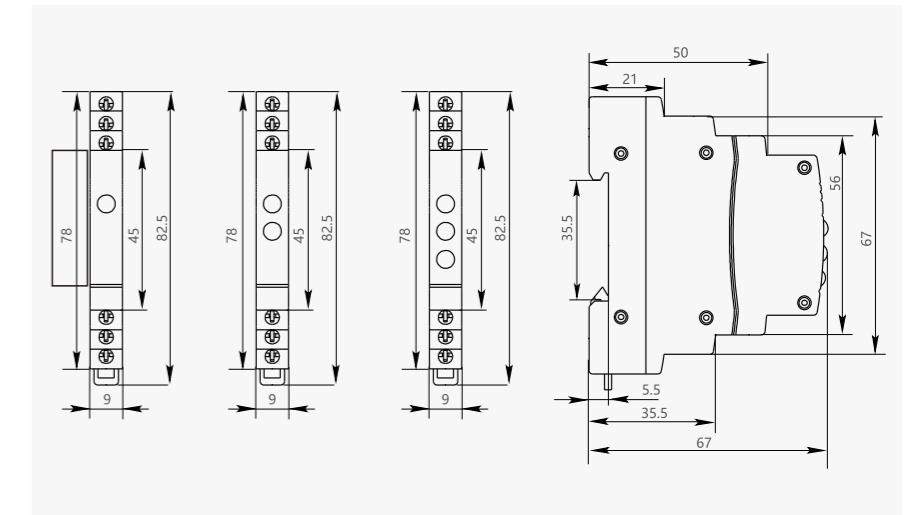

**Modular DIN Rail**  
**YCMV3 Voltage Meter**

**A**



YCMV1



YCMV3

**General**


The Modular Voltage Meter is applicable to circuit with rated frequency 50/60Hz for measurement and digital voltage display.

Standard: IEC 60051-1.

**Technical data**

Parameter	Data
Type	YCMV1: Single phase 1 LED digital display YCMV3: Three phase 3 LED digital display
Terminal for wiring	Single phase L+N Three phase 3L+3N
Digital colour	Red, Green
Voltage measuring range	AC 80V~500V
Rated frequency	50/60Hz
Working current	≤20mA
Measuring accuracy	1
Measuring rate	> 200MS/time
Protection degree	IP20
Electrical Life	≥15000hours
Ambient temperature(with daily average≤35°C)	-5°C~+40°C
Storage temperature	-25°C~+70°C
Air relative humidity	10-80%(no condensation)
Working pressure	80~160Kpa
Sunniness	no sunniness
Terminal for wiring	1.5mm <sup>2</sup>
Mounting	On DIN rail EN60715(35mm) by means of fast clip device

**Overall and mounting dimensions(mm)**

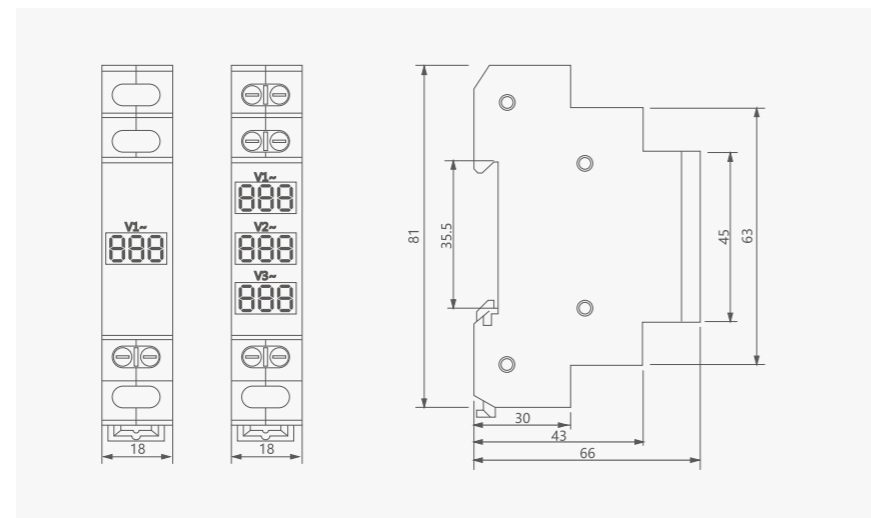

# YC6VA

## Overvoltage and Undervoltage Protector




**CNC**  
ELECTRIC



## Modular DIN Rail

### YC6VA Overvoltage and Undervoltage Protector

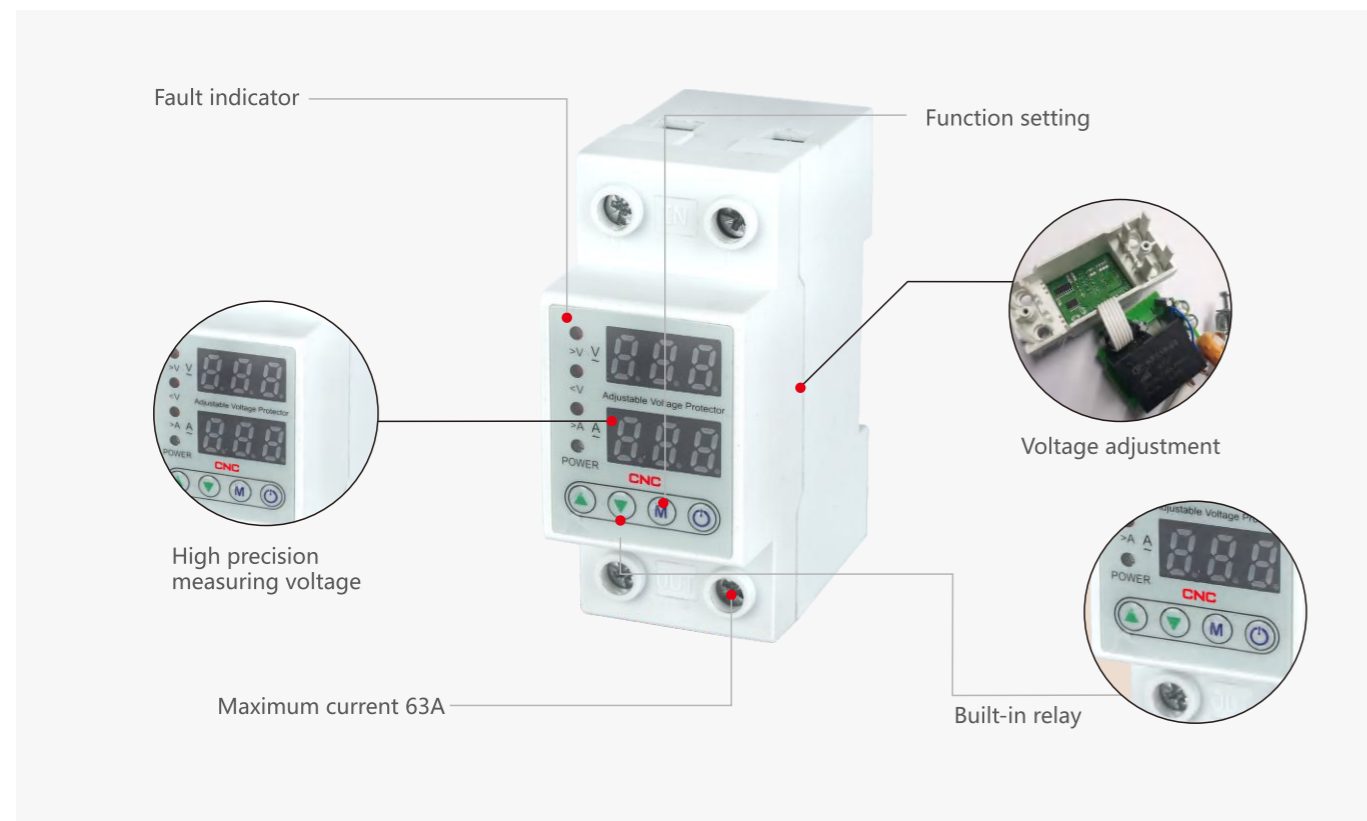

#### General


Voltage and current display relay is a microprocessor-based voltage monitoring device for single-phase AC networks to protect electrical equipment from surge voltage. The device analyzes the main voltage and displays its current value on a digital indicator. Load is switched by electromagnetic relay. The user can set the current voltage value and delay time through the button. The value is stored in non-volatile memory. Aluminum wires and copper wires can be used for connection.

#### Application

Voltage and current display relay used in administrative, industrial and residential buildings and has the function of protecting single-phase lines:

- Undervoltage protection;
- Overvoltage protection;
- Working under voltmeter mode;
- Overcurrent protection.

#### Wiring diagram

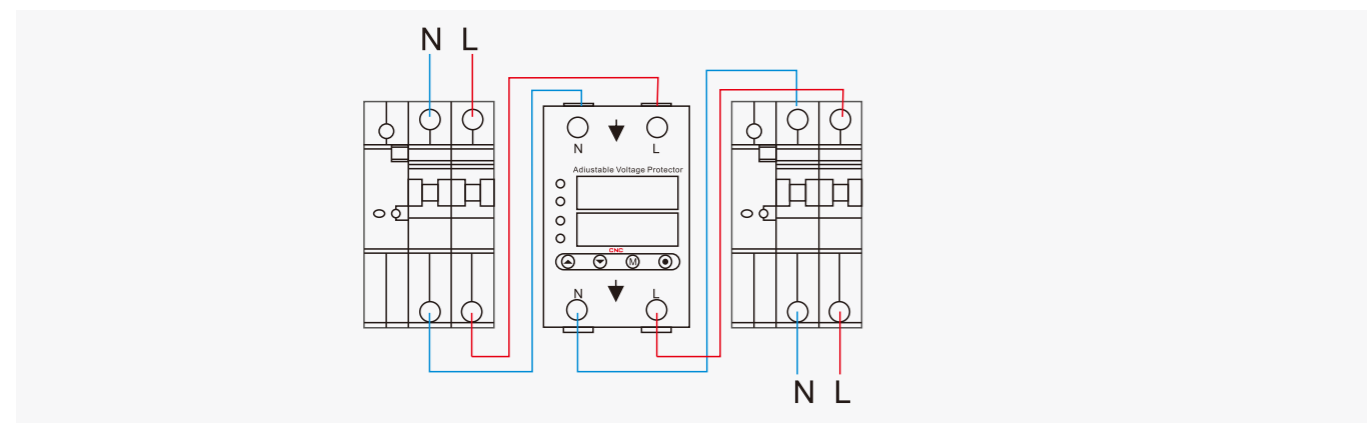


## Modular DIN Rail

### YC6VA Overvoltage and Undervoltage Protector

#### Technical data

Rated Working Voltage	AC
Rated Frequency	50/60Hz
Rated Working Current	40A Or 63A
Over-voltage Protection Value	AC230V-AC300V
Under-voltage Protection Value	AC100V-AC220V
Voltage Power Off Time	1-400s
Overcurrent Protection Value	1-40A ,Or 1-63A
Overcurrent Power Off Time	1-30s
Recover time(Starting Delay Time)	1-400s
Own Power Consumption	≤1.5W
Pollution Level	2 Class
Rated Insulation Voltage	400V
Output Contact	1NO
Protection	Ip20
Pollution	3
Electrical Life	100000 times
Mechanical Life	1000000 times
Altitude	≤2000m
Operating Temperature	-5°C~40°C
Relative Humidity	50% at 40°C(non-condensing)
Storage Temperature	-40°C~55°C
Installation	35mm DIN rail

#### Overall and mounting dimensions(mm)

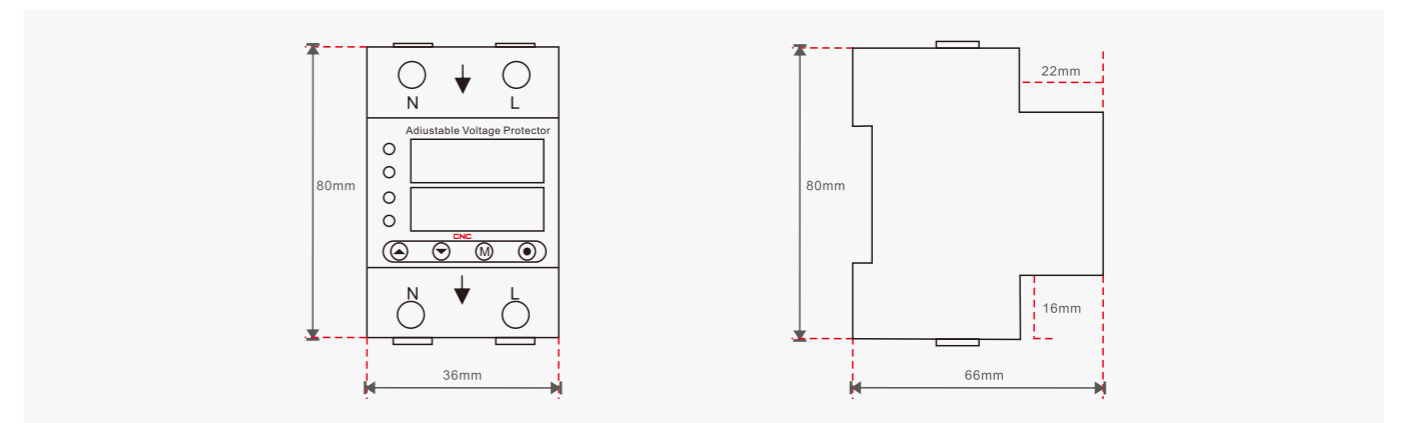

# YC6VAZs Electronic phase switch



### General

Function description: When a phase of L1, L2, L3 overvoltage, undervoltage or phase lacked, the relay will be disconnected and automatically search for the normal phase, and switch to open the relay of the normal phase, switching priority L1>L2>L3!

### Technical data

Model	YC6VAZs		
Rated Supply voltage	AC 220V		
Operation voltage	AC 80V-400V(single phase)		
Rated frequency	50/60Hz		
Electric current(>A)setting range	63A/80A/100A		
Overvoltage(>U)setting range	230-300V		
Undervoltage(<U) setting range	110-210V		
Reset/start delay	1-30S		
Voltage measurement accuracy	2%(Not exceeding 2% of the overall range)		
Rated insulation voltage	400V		
Output contact	1NO		
Electrical life	10 <sup>5</sup>		
Mechanical life	10 <sup>6</sup>		
Protection degree	IP20		
Pollution degree	8		
Altitude	≤2000m		
Operatintg temperature	-50°C~55°C		
Humidity	<50% at 40°C(without condensation)		
Storage temperature	-30°C~70°C		
Current Specification	63A	80A	100A
Rated Operating current(In,A)	63A	80A	100A
Max Operating Current I <sub>max</sub> (A,within 10min)	80A	100A	60A
Max power of load (KW)	13.9KW	17.6KW	22KW

### Default Setting

Technical Parameter	Setting range	Step	Factory Setting
Over-voltage protection value	AC230V-300V	1V	AC270V
Under-voltage protection value	AC210V-140V	1V	AC170V
Recovery delay time	1S-30S	1S	1S

# YC6VAZs Electronic phase switch



### Function Setting


220 220 220  
000

H1- Press the H key to set overvoltage value, short press or long press again to adjust the overvoltage value  
270 Press SAVE to save when finished  
230-300V


L1- Press the L key to set the undervoltage value, short press or long press again to adjust the undervoltage  
170 Press SAVE to save when finished  
210-140V

L1- Press the TIME key to set the delay recovery time value, short press or long press again to adjust the value of the delay recovery  
1 Press SAVE to save when finished  
1-30S

### Overall and mounting dimensions

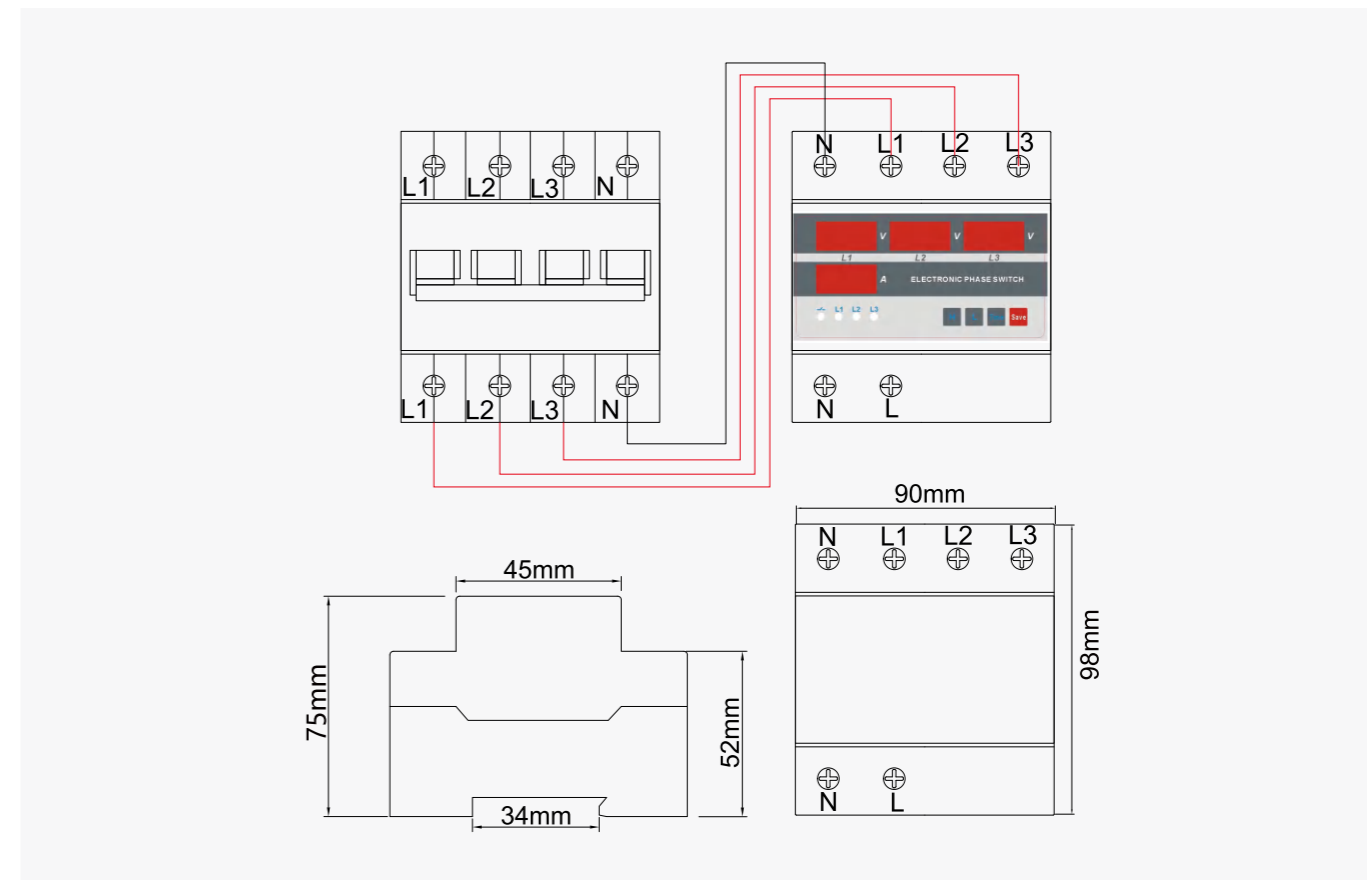

**YC6VAs/YC6Vs** Overvoltage and Undervoltage Protector

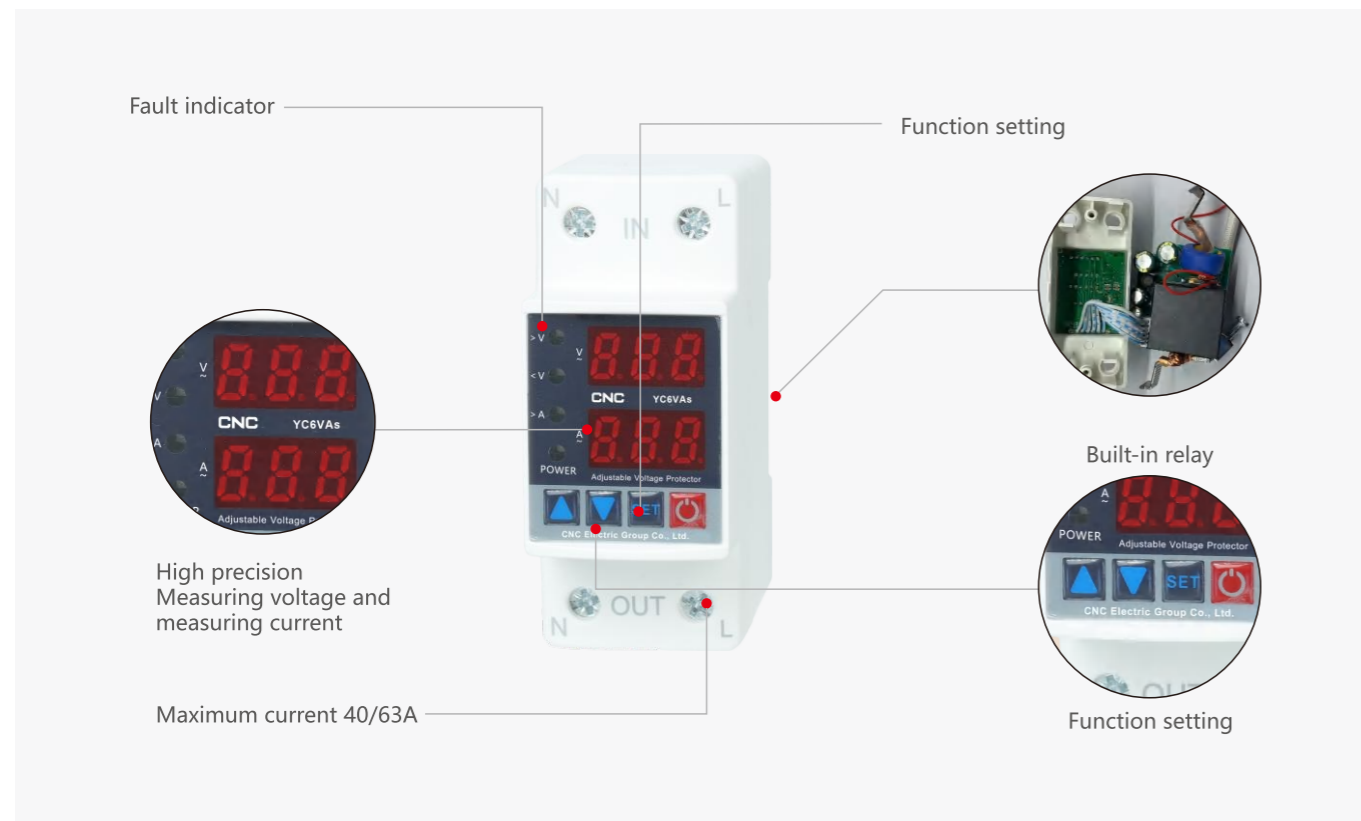

**General**

Voltage and current display relay is a microprocessor-based voltage monitoring device for single-phase AC networks to protect electrical equipment from surge voltage. The device analyzes the main voltage and displays its current value on a digital indicator. Load is switched by electromagnetic relay. The user can set the current voltage value and delay time through the button. The value is stored in non-volatile memory. Aluminum wires and copper wires can be used for connection.

**Application**

Voltage and current display relay used in administrative, industrial and residential buildings and has the function of protecting single-phase lines:

- Undervoltageprotection ;
- Overvoltageprotection ;
- Workingundervoltmetermode;
- Overcurrent proteciton.

**YC6VAs/YC6Vs** Overvoltage and Undervoltage Protector


Technical data	YC6VAs	YC6Vs	YC6As
Rated supply voltage	AC 220V		
Operation voltage range	AC80V-400V		AC80V-350V
Rated frequency	50Hz/60Hz		
Overvoltage (>U) setting range	230-300V		
Undervoltage (<U) setting range	140~220 V		
Rated current	40/63A (subject to prodect label)		1~40/63A (subject to prodect label)
> U and < U trip delay	0.1~30s	0.5S	0.5S(> Atrip delay)
Reset/start delay	1~500S	1~600S	1~600S
Voltage measurement accuracy	2% (Not exceeding 2% of the overall range)		1% (Not exceeding 1% of the overall range)
Rated insulation voltage	400V		
Output contact	1NO		
Electrical life	10 <sup>5</sup>		
Mechanical life	10 <sup>6</sup>		
Protection degree	Ip20		
Pollution degree	3		
Altitude	≤ 2000m		
Operating temperature	-50°C~55°C		
Humidity	≤50% at 40%(without condensation)		
Storage temperature	-30°C~70°C		

Current specification	15A	25A	32A	50A	63A
Rated operating current(In, A)	15	25	32	50	63
Maximum operating current I <sub>max</sub> (A, within 10min)	25	30	40	60	80
Max. power of load(kW)	3.6	5.5	7	11	13.9


## Modular DIN Rail

### YC6VAs/YC6Vs Overvoltage and Undervoltage Protector

#### Wiring diagram

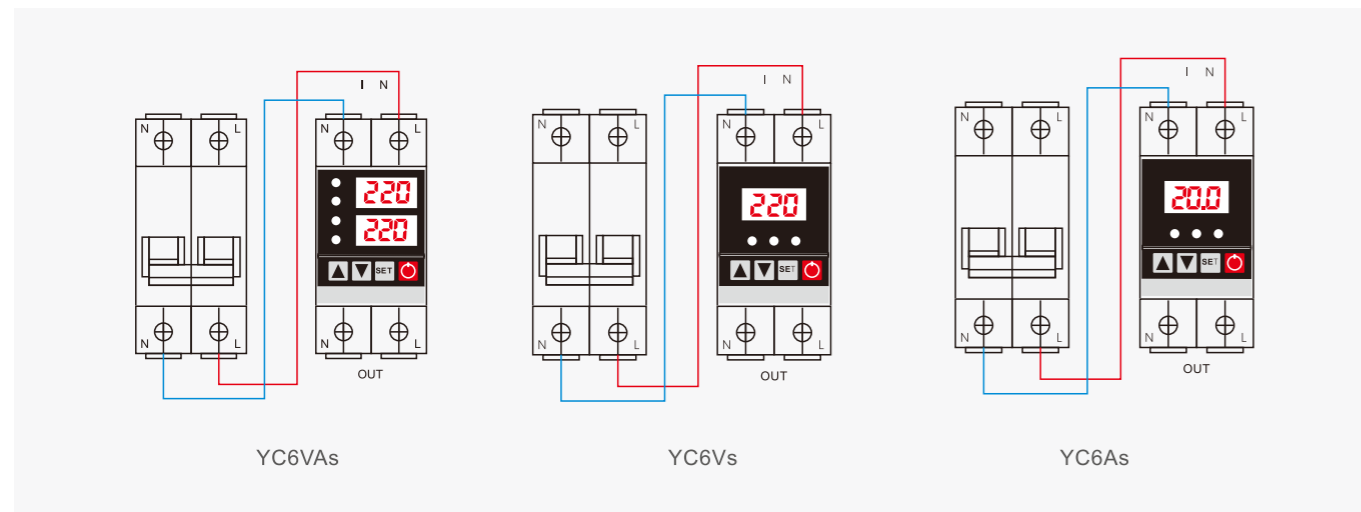


#### Overall and mounting dimensions(mm)

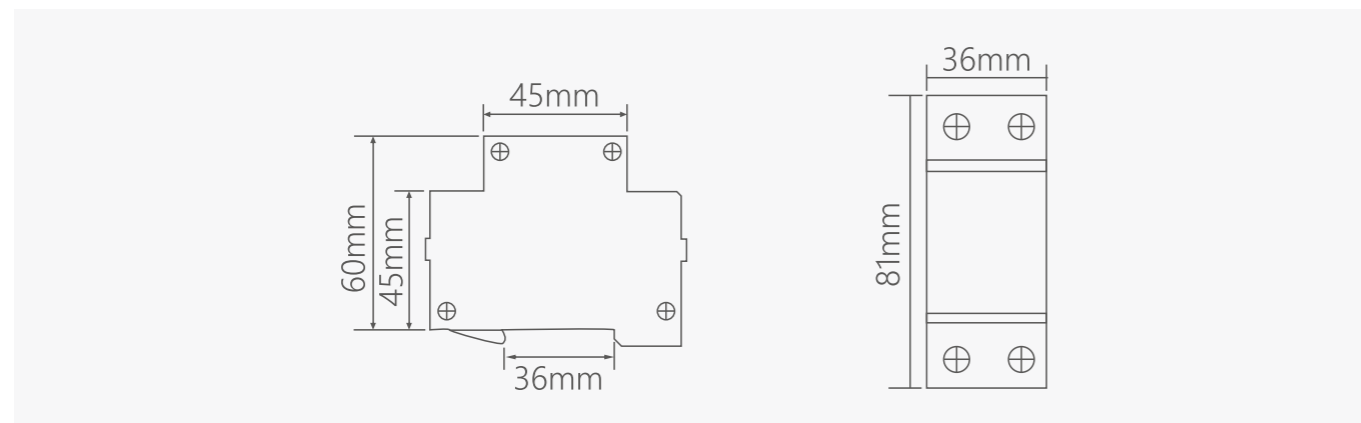

## Modular DIN Rail

### YC9VA Overvoltage and Undervoltage Protector

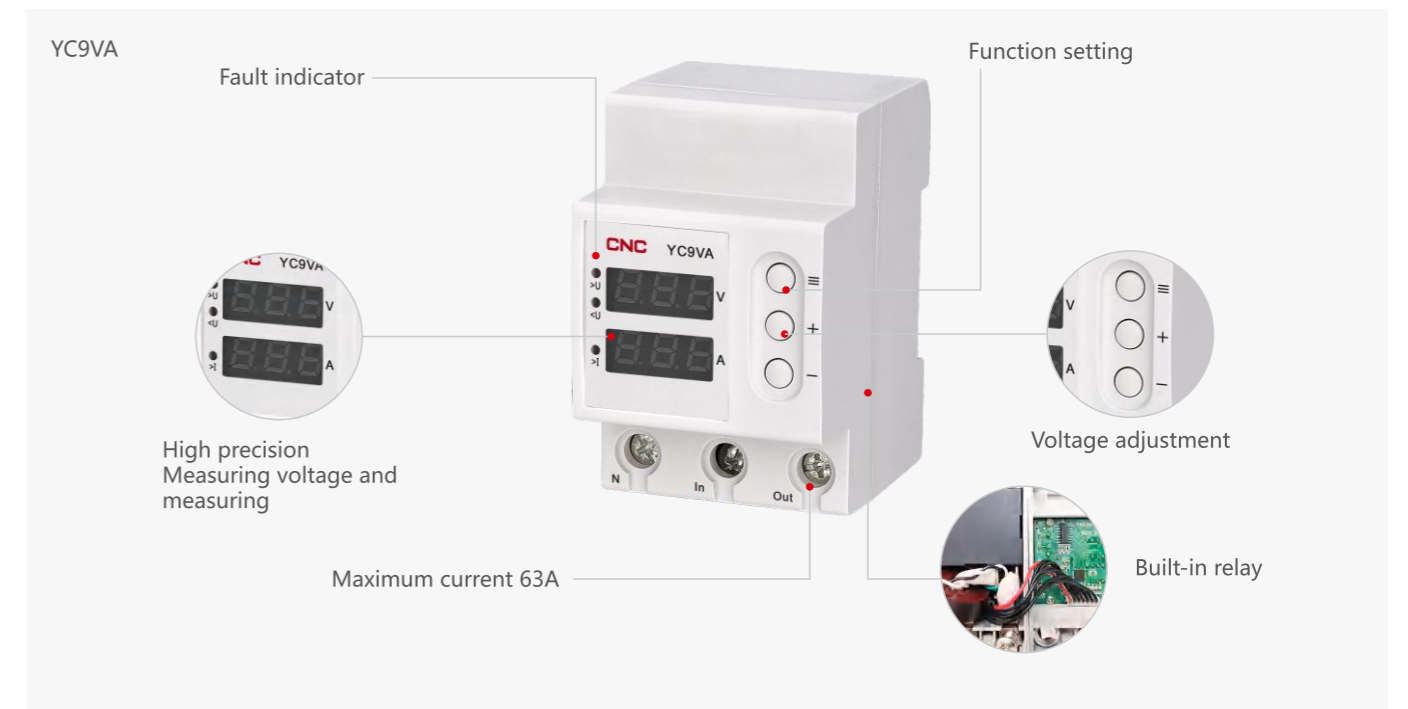

#### General

YC9VA/YC9VA2 voltage and current display relay is a microprocessor-based voltage monitoring device for single-phase AC networks to protect electrical equipment from surge voltage. The device analyzes the main voltage and displays its current value on a digital indicator. Load is switched by electromagnetic relay. The user can set the current voltage value and delay time through the button. The value is stored in non-volatile memory. Aluminum wires and copper wires can be used for connection.

#### Application

YC9VA/YC9VA2 voltage and current display relay used in administrative, industrial and residential buildings and has the function of protecting single-phase lines:

- Undervoltage protection;
- Overvoltage protection;
- Working under voltmeter mode;
- Overcurrent protection.



## YC9VA Overvoltage and Undervoltage Protector

### Technical data


Parameter	Data
Rated power supply voltage	AC230V
Rated frequency	50/60Hz
Maximum voltage adjustment range	230V~300V
Minimum voltage adjustment range	110V~210V
Range of adjustment of the maximum current	1A~63A
Deviation	2%
Maximum action time	<275V: 0,1s, ≥275V: 0,02s
Delay time adjustment range	1-90s
Minimum action time	0.5s (≥160V); <0.1s(<160V)
Delay time adjustment range, overcurrent trip time	1-90s (Inom <lism <lmax); 0.1s (lism≥lmax)
Voltmeter accuracy	≤1%
Rated insulation voltage	400V
Output contact	1NO
Protection	IP20
Pollution	3
Electrical life	100000 times
Mechanical life	1000000 times
Altitude	≤2000m
Operating temperature	-5°C~40°C
Relative humidity	50% at 40°C (non-condensing)
Storage temperature	-40°C~55°C
Installation	35mm DIN rail
Range of adjustment of the on-delay time	1-90s

### Operation


When a voltage is applied to the device, the digital indicator will display the current value of the voltage in the network. A flashing light indicates that there is no voltage on the output of the device. If the supply voltage is within the set range, after a while(default is 30 seconds), the load will turn on and the indicator will stop flashing. If the voltage is not within the specified range, the load will not be connected to the line until the voltage returns to normal. Meantime, if the voltage is lower than the set lower limit during the restart, the error indicator will flash. If the voltage is higher than the set upper limit, the error indicator will remain on.

## YC9VA Overvoltage and Undervoltage Protector


### Wiring diagram

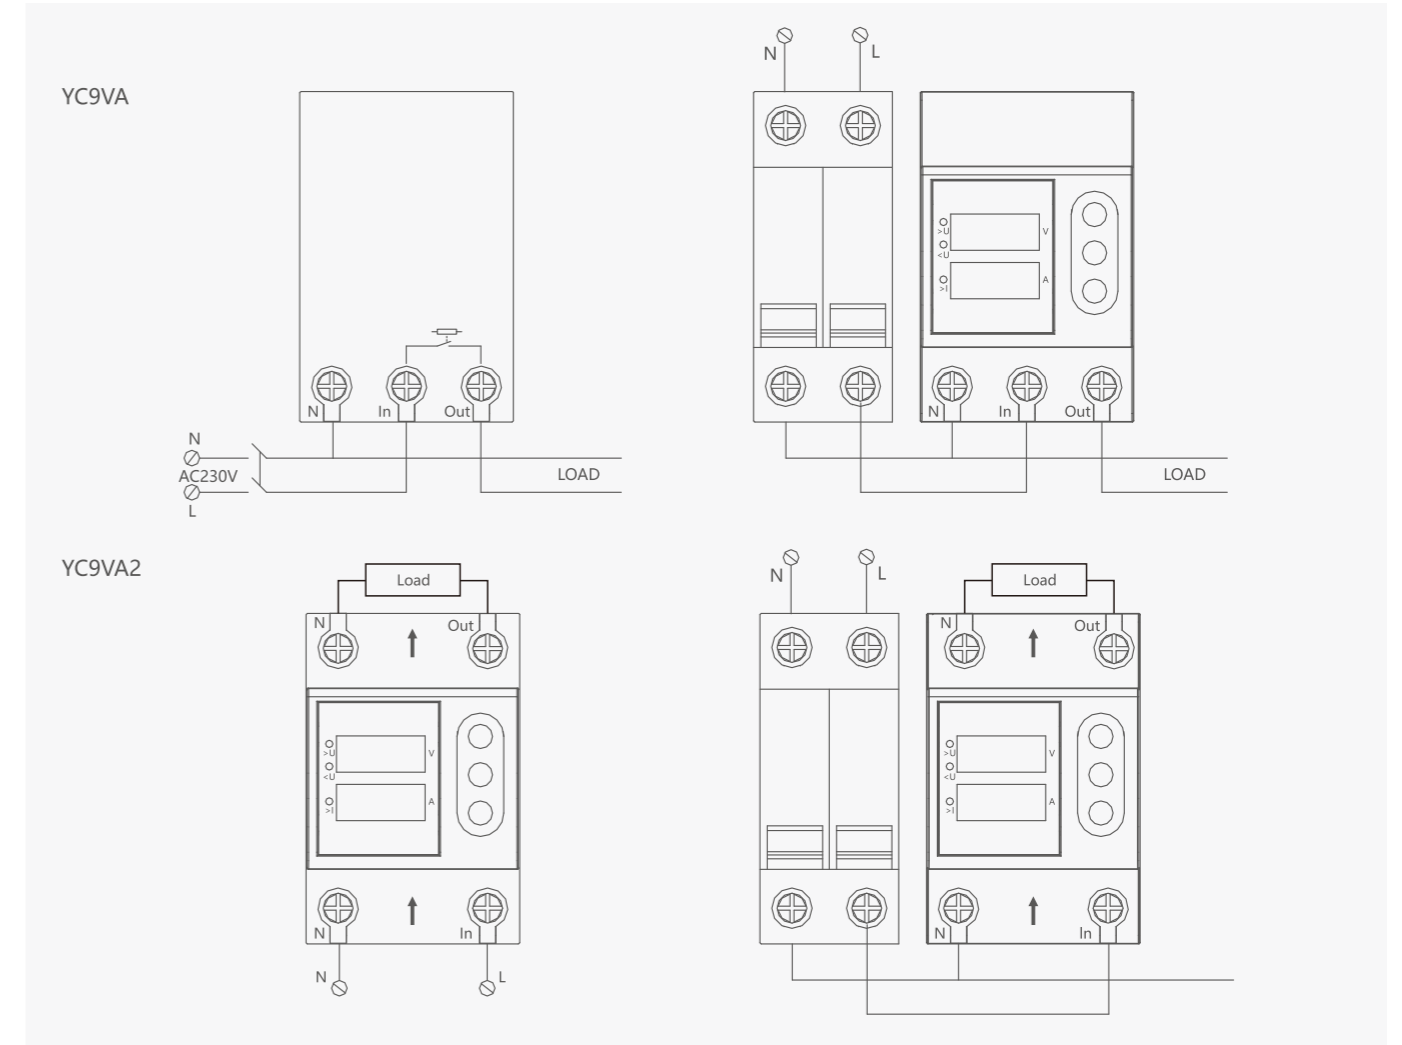

### Overall and mounting dimensions (mm)

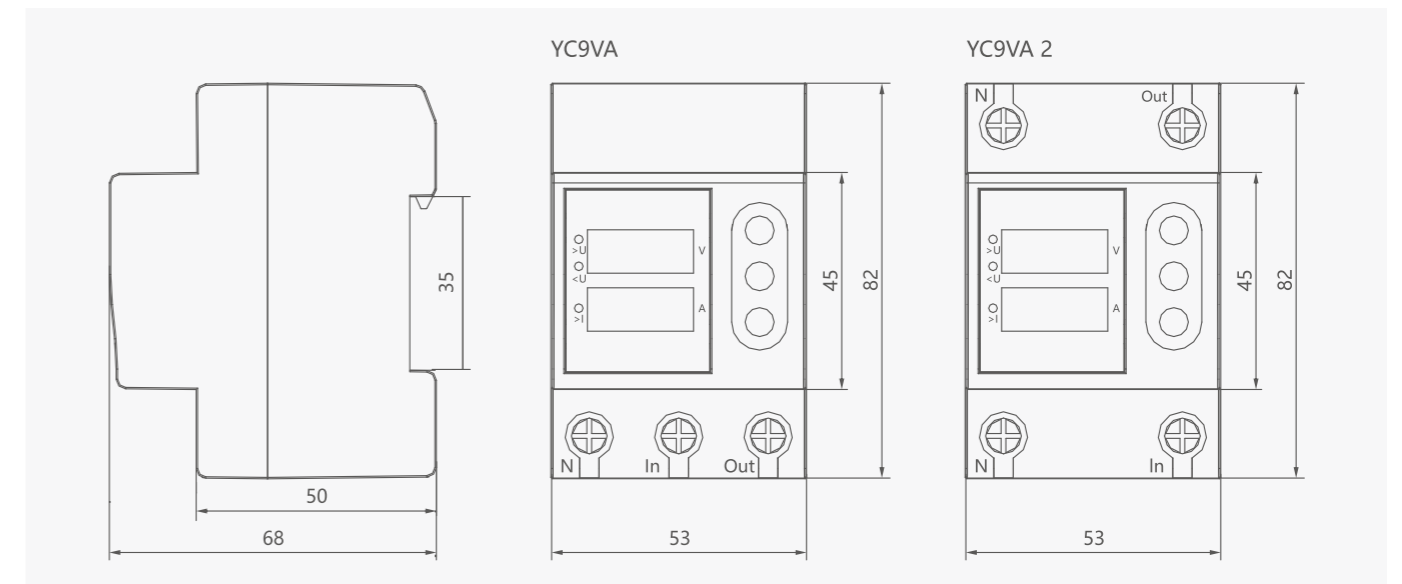

## YC9VA-3 Overvoltage and Undervoltage Protector

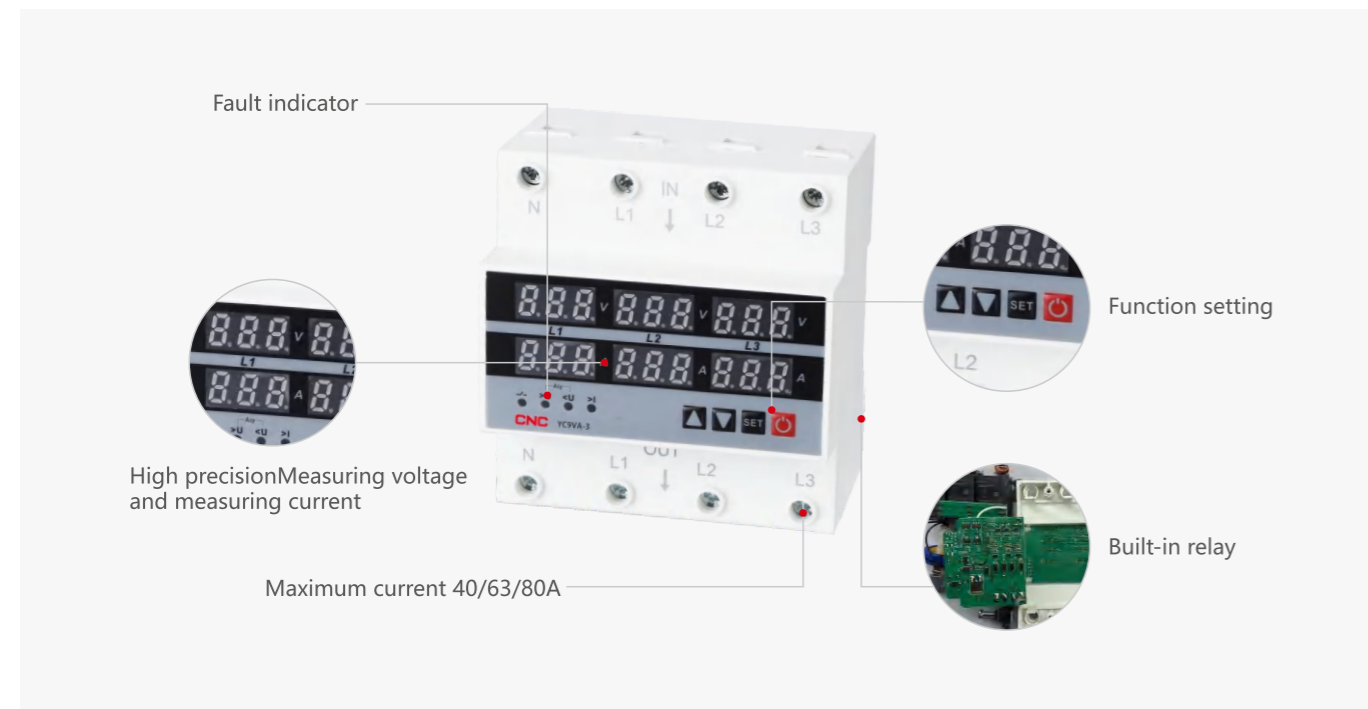

### General

YC9VA-3 voltage and current display relay is a microprocessor-based voltage monitoring device for three-phase AC networks to protect electrical equipment from surge voltage. The device analyzes the main voltage and displays its current value on a digital indicator. Load is switched by electromagnetic relay. The user can set the current voltage value and delay time through the button. The value is stored in non-volatile memory. Aluminum wires and copper wires can be used for connection.

### Application

YC9VA-3 voltage and current display relay used in administrative, industrial and residential buildings and has the function of protecting single-phase lines:

- Undervoltage protection;
- Overvoltage protection;
- Working under voltmeter mode;
- Overcurrent protection.

## YC9VA-3 Overvoltage and Undervoltage Protector


### Technical data

Parameter	L-N	L-L
Rated supply voltage	AC 220	AC 380
Operation voltage range	AC 80~400V(three phase)	AC 140~700V(three phase)
Rated frequency	50/60Hz	50/60Hz
Electric current (>A) setting range	1~40A/63A/80A	1~40A/63A/80A
Overvoltage (>U) setting range	230~300V	390~500V
Undervoltage (<U) setting range	140~220V	260~370V
Rated current	40A/63A/80A/100A	40A/63A/80A/100A
>U and <U trip delay	0.1~30S	0.1~30S
Reset/start delay	1~500S	1~500S
Voltage measurement accuracy	2%	2%
Rated insulation voltage	400V	700V
Output contact	3NO	3NO
Electrical life	10 <sup>5</sup>	10 <sup>5</sup>
Mechanical life	10 <sup>6</sup>	10 <sup>6</sup>
Protection degree	Ip20	Ip20
Pollution degree	3	3
Altitude	≤2000m	≤2000m
Operating temperature	-50°C~55°C	-50°C~55°C
Humidity	≤50% at 40(without condensation)	≤50% at 40(without condensation)
Storage temperature	-30°C~70°C	-30°C~70°C


Rated supply voltage	AC 220V				AC 380V			
	40A	63A	80A	100A	40A	63A	80A	100A
Current specification								
Rated operating current(In, A)	40	63	80	100	40	63	80	100
Maximum operating current I <sub>max</sub> (A, with in 10 min)	63A	80A	100A	125A	63A	80A	100A	125A
Max. power of load(kW)	8.8	13.9	17.6	22	15.2	24	30.4	38

Wiring diagram

**A**

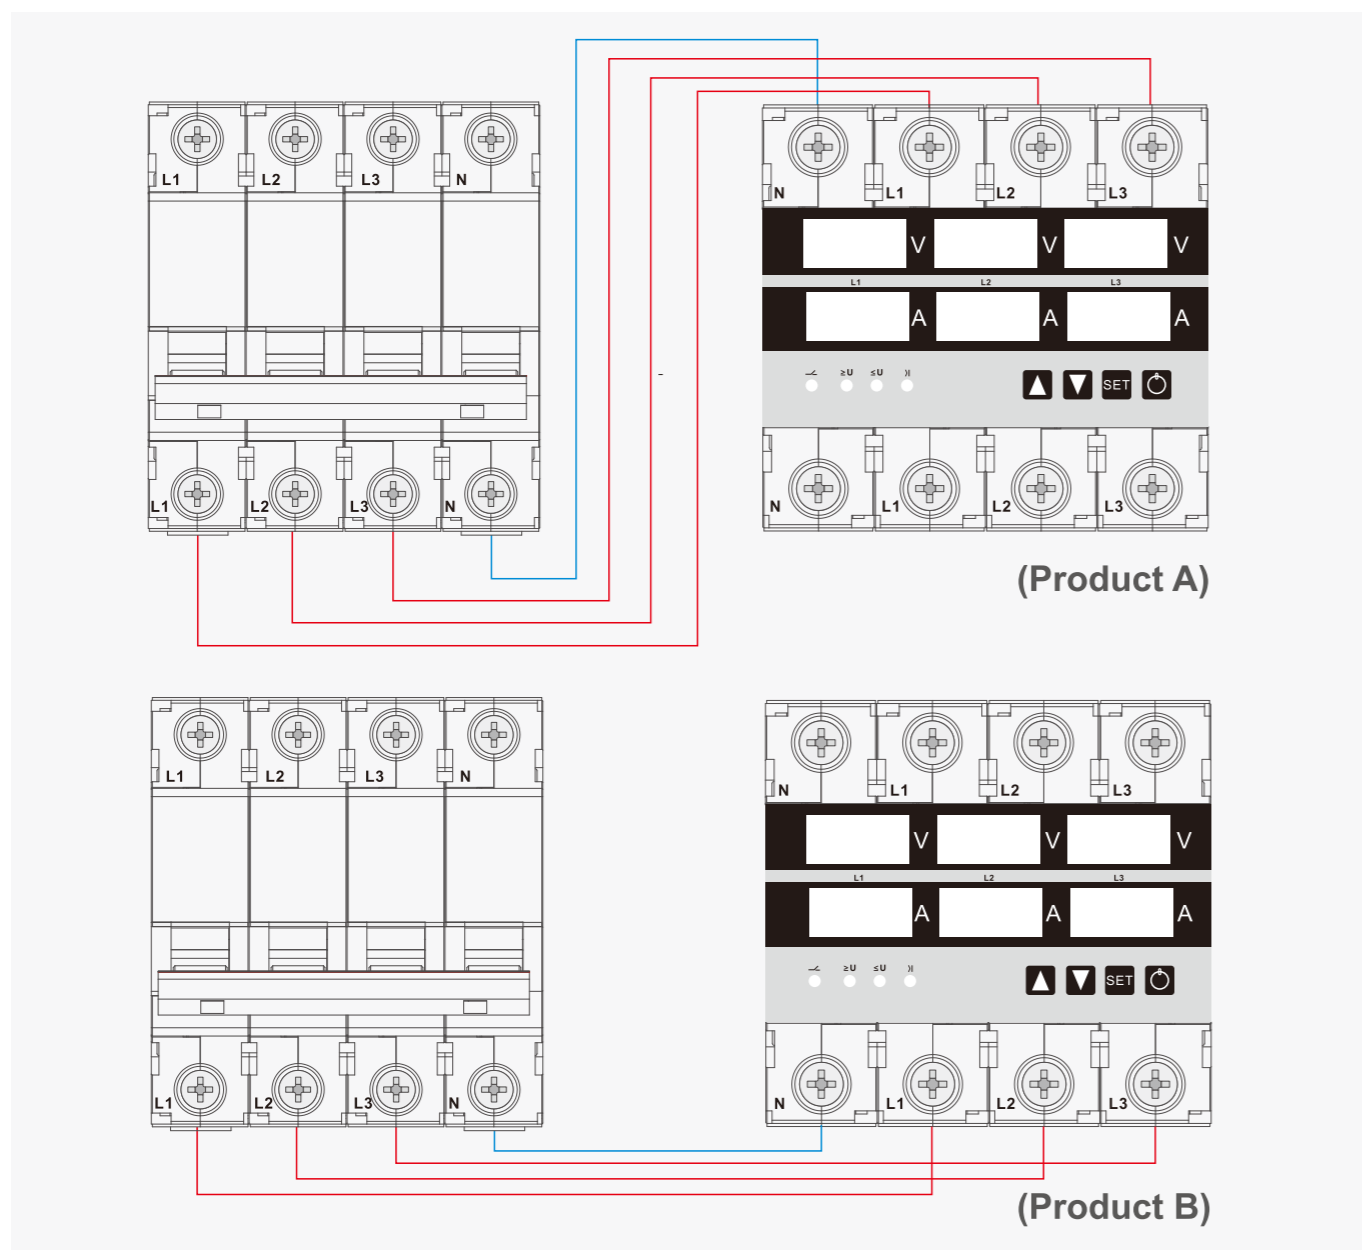

Overall and mounting dimensions(mm)

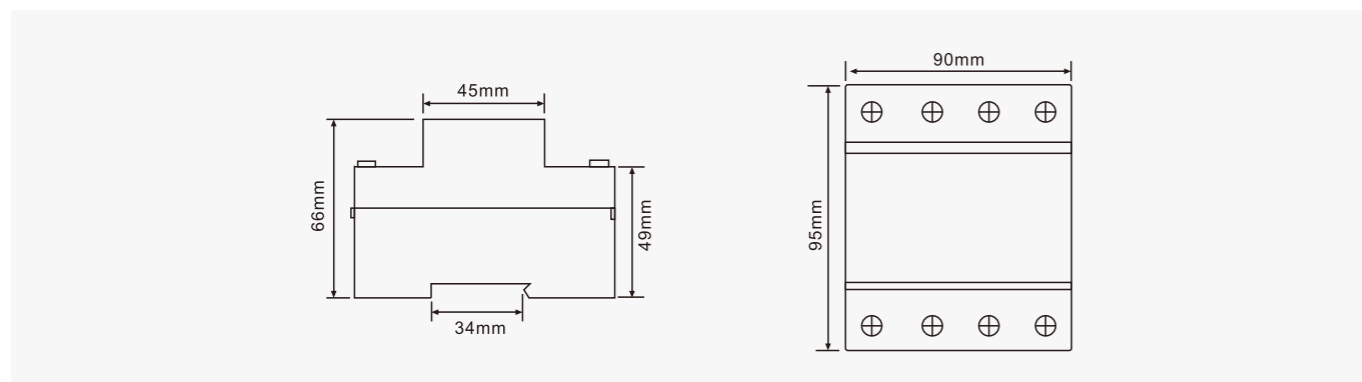

# YCZF6

## Self-recovery Overvoltage and Undervoltage Protector



## YCZF6 Self-recovery Overvoltage and Undervoltage Protector




### General

Self-recovery overvoltage and undervoltage protector is a new type of intelligent protection apparatus. With the modular standard design, in case of overvoltage or undervoltage of power supply line. The protector can quickly and safely break the circuit under continuous high voltage surge in case of overvoltage or undervoltage of power supply line with its modular standard design, avoiding the accident caused by abnormal voltage entry into the terminal apparatus.; when voltage resumes normal value, the protector will automatically close the circuit within the specified time to ensure the terminal apparatus can operate normally in an unattended way. Self-recovery overvoltage and undervoltage protector is applied for the users or loads of AC 230V, 50Hz and rated operating current and below. It is mainly used in the household distribution box or other distribution line requiring protection.

- Meet the requirements of building electrical design code;
- Small size, automatic reset without manual operation;
- Cut off the circuit quickly and safely when the voltage fluctuation is too high or too low;
- Automatic re-closing and voltage loss trip function by detectiong voltage;
- With over voltage, under voltage,re-closing indicator state;
- Low power consumption and long service life.

### Type designation

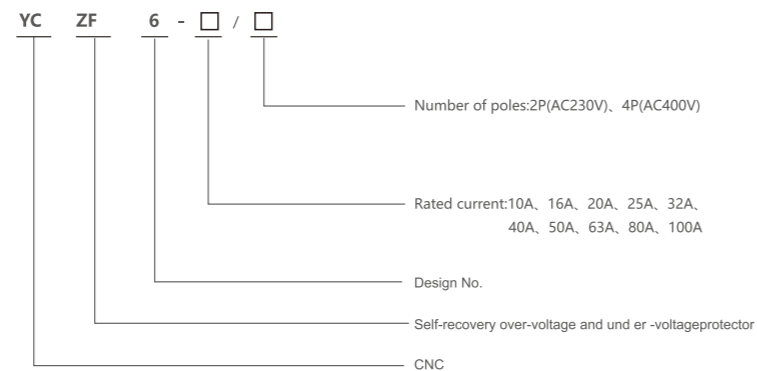

### Operating Conditions

- Ambient temperature:-35°~70°C
- Altitude:≤3000M
- Atmospheric conditions:The atmospheric relative humidity is not more than 50% when the ambient air temperature is +40°C ; high relative humidity is permitted under low temperature,For example,it may be up to 90% at +20°C ; special measures should be taken in case of occasional condensation due to temperature variation;
- Pollution degree:level 2;
- Mounting category:category II or III.
- Mounting form:It is installed by using the TH35-7.5 section steel mounting rail.The inclination of installing surface cannot exceed 5°.


## YCZF6 Self-recovery Overvoltage and Undervoltage Protector




### Technical data

Rated voltage	AC230V/400V 50Hz
Overvoltage operation cutoff value	275V±5V
Undervoltage opetation cutoff value	165V±5V
Rated operating current	10A, 16A, 20A, 25A, 32A, 40A, 63A, 80A, 100A
Operating time of protection	≤1s
Time delay close time	20s-60s
Electric mechanical life	≥50000 times
Power consumption	≤2W

### Wiring diagram

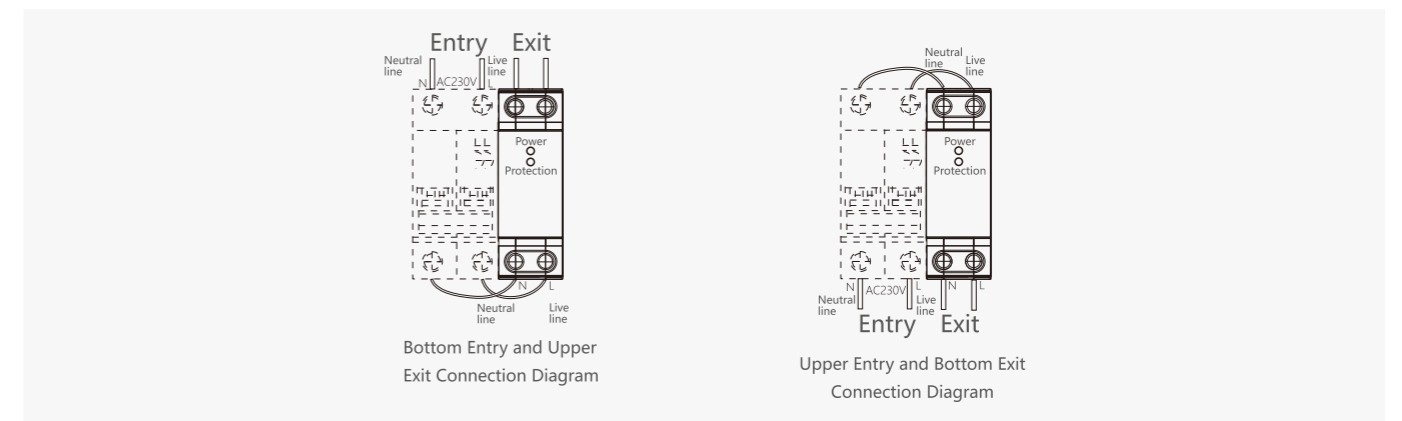

### Overall and mounting dimensions(mm)

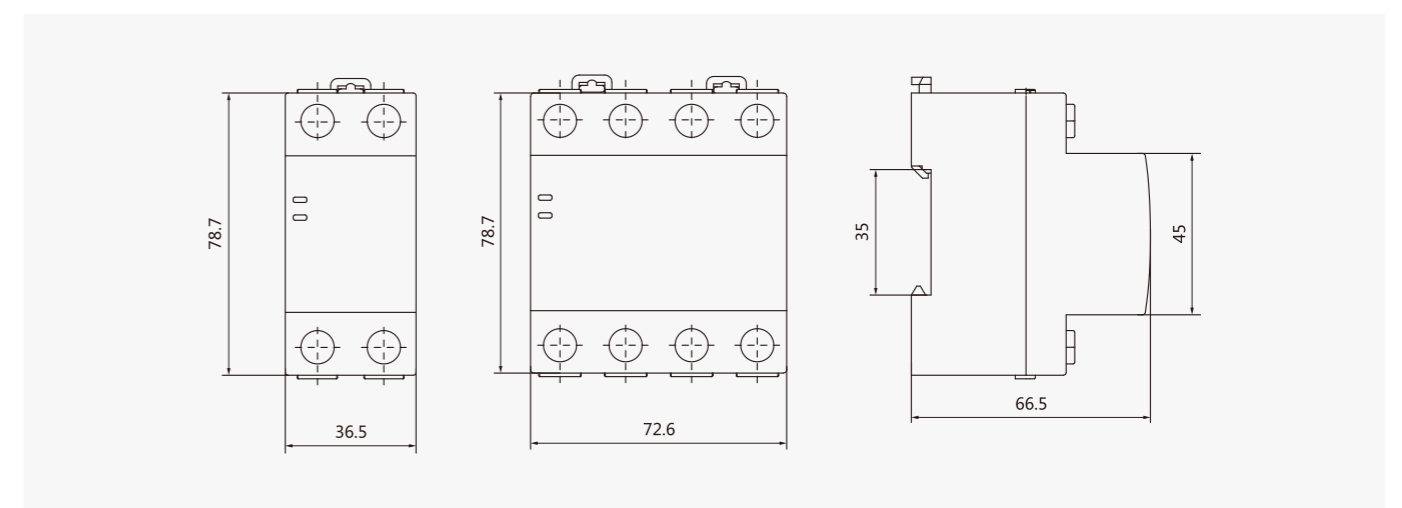



## TMS-5 Modular Socket



### General


Grounded socket TMS-5 is suitable for single-phase power supply, used in the auxiliary AC circuit for connecting electrical appliances (portable lamps, power supply, etc.).

Standard: IEC 60884-1.


### Technical data

Parameter	Value
Rated voltage, Un, V	180-250
Rated frequency, fn, Hz	40-60
Rated current, A	16
Connection mode	2P+PE
Protection degree	IP 20
Cross-sectional area of wire, mm <sup>2</sup>	2,5

### Wiring diagram

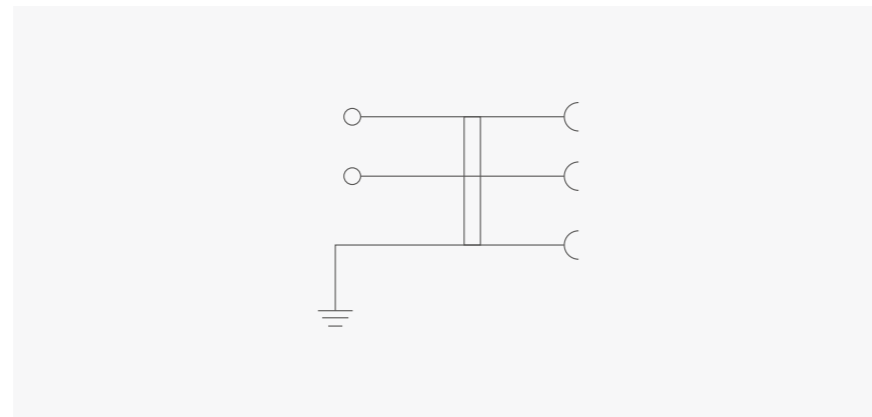

### Overall and mounting dimensions(mm)

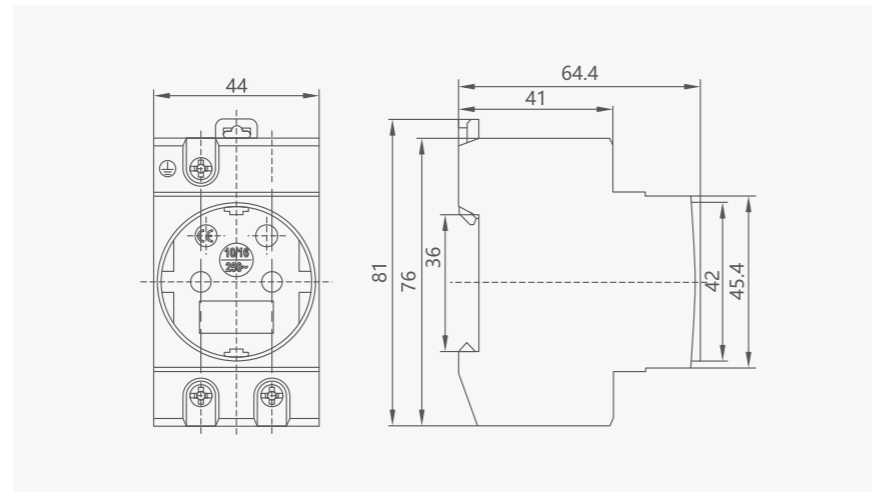

The socket must be installed and connected by professional electrical personnel.  
The socket is mounted on DIN 35mm guide rail, the tightening torque is 2.5 N.m.

## YCS6-B Surge Protection Device



### General


YCS6-B series Surge Protection Device is suitable for TT, IT, TN-S, TN-C and TN-C-S, the power supply system with the rated voltage up to 230/400V and AC 50/60Hz. The product is usually installed in the incoming line low voltage distribution box of the building, and it can release 100kA lightning stroke current.

Standard: IEC61643-1.

### Technical data

Rated Operating Voltage Uc(V~)	220V	380V	220V	380V	220V	380V
Maximum Continuous Operating Voltage Uc(V~)	275V	385V	420V	275V	385V	420V
Voltage Protection Level Up(V~)kV	≤1.8	≤2.0	≤2.2	≤2.0	≤2.2	≤2.4
Nominal Discharge Current In(8/20μs)kA	30		40		60	
Maximum Discharge Current Imax(8/20μs)kA	60		80		100	
Response Time ns	< 25					
L/N(mm <sup>2</sup> )The Cross Section of L/N Line	6					
PE(mm <sup>2</sup> )The Cross Section of PE Line	10					
Fuse or Switch(A)	63A		63A		100A	
Operating Environment°C	-40°C~ +85°C					
Relative Humidity(25°C)	≤95%					
Installation	Standard Rail 35mm					

### Overall and mounting dimensions(mm)

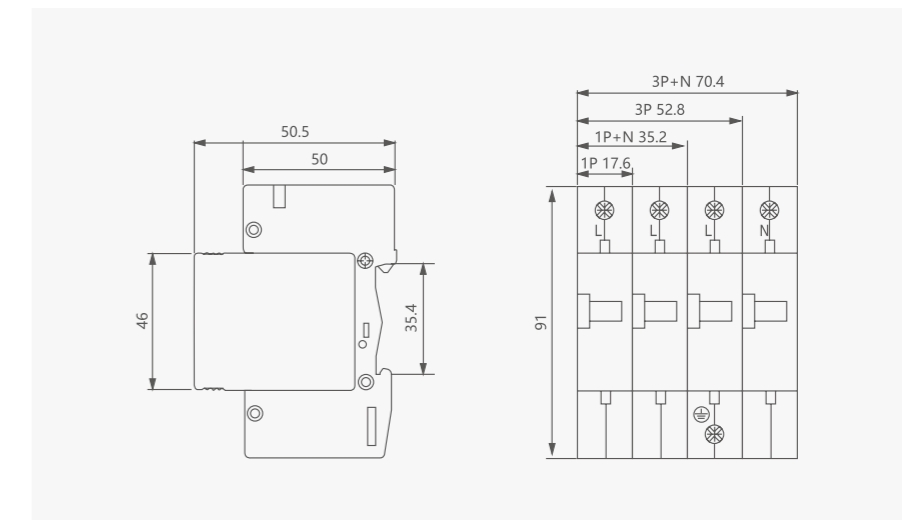

## YCS6-C Surge Protection Device



### General

YCS6-C series Surge Protection Device is suitable for TT, IT, TN-S, TN-C and TN-C-S, the power supply system with the rated voltage up to 230/400V and AC 50/60Hz. It can work as the equipotential bonding when the lightning strikes.

The product is mainly applied to protect the low voltage electric equipment and prevent the surge being caused by the thunder or switching overvoltage. As a univoltage limiting device, YCS6-C is equipped with the heavy-duty Zinc Oxide piezoresistor.


YCS6-C series (Protection level: II) Protection Device need to be installed on the up link of the equipment, connecting with outer conductor(L) or neutral conductor(N) and the earthing device. Users can install the YCS6-C in the boundary of LPZOA or LPZ1, usually in the incoming line low voltage main distribution box.

Standard: IEC61643-1.

### Technical data

Rated Operating Voltage Uc(V~)	110V	220V	380V	220V	380V
Maximum Continuous Operating Voltage Uc(V~)	140V	275V	320V	385V	420V
Voltage Protection Level Up(V~)kV	≤0.8	≤1.2	≤1.5	≤1.8	≤2.0
Nominal Discharge Current In(8/20μs)kA	20		15		
Maximum Discharge Current Imax(8/20μs)kA	40		30		
Response Time ns	< 25				
Test Standard	IEC61643-1				
L/N(mm2)The Cross Section of L/N Line	2.5				
PE(mm2)The Cross Section of PE Line	6				
Fuse or Switch(A)	32A		25A, 32A		
Operating Environment°C	-40°C~+85°C				
Relative Humidity(25°C)	≤95%				
Installation	Standard Rail 35mm				

### Overall and mounting dimensions(mm)

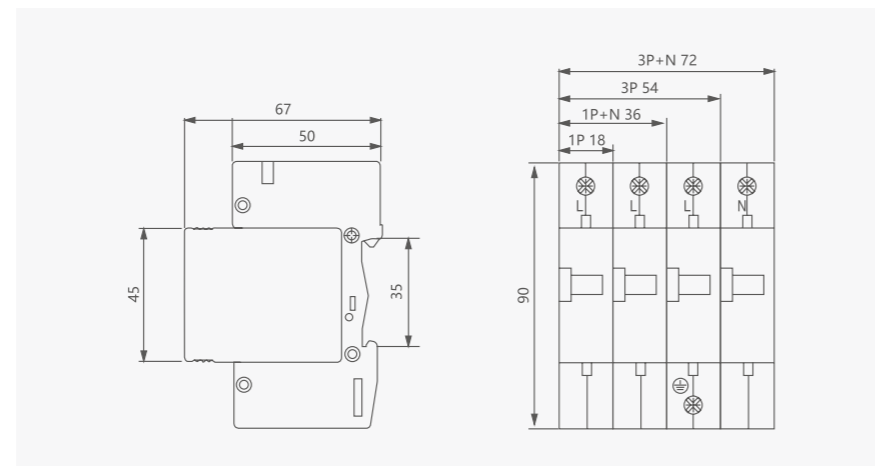

## YCS6-D Surge Protection Device



### General

YCS6-D series Surge Protection Device is suitable for TT, IT, TN-S, TN-C and TN-C-S, the power supply system with the rated voltage up to 230/400V and AC 50/60Hz. The product is usually installed in the incoming line low voltage distribution box of the building, and it can release 20kA lightning stroke current.


The lightning current SPD protection with protection level: III is applied to the Equipotential bonding when the lightning strike. YCS6-D Device should be installed in the boundary of LPZ1, LPZ2 and LPZn, usually in front of the residential distribution box, computer center, informational equipment, electronic equipment and controlling equipment or in the nearest socket box.

Standard: IEC61643-1.

### Technical data

Rated Operating Voltage Uc(V~)	220V	380V	220V	380V
Maximum Continuous Operating Voltage Uc(V~)	275V	385V	275V	385V
Voltage Protection Level Up(V~)kV	≤0.7	≤1.0	≤1.2	≤1.5
Nominal Discharge Current In(8/20μs)kA	5		10	
Maximum Discharge Current Imax(8/20μs)kA	10		20	
Response Time ns	< 25			
Test Standard	IEC61643-1			
L/N(mm2)The Cross Section of L/N Line	2.5			
PE(mm2)The Cross Section of PE Line	6			
Fuse or Switch(A)	10A, 16A		16A, 25A	
Operating Environment°C	-40°C~+85°C			
Relative Humidity(25°C)	≤95%			
Installation	Standard Rail 35mm			

### Overall and mounting dimensions(mm)

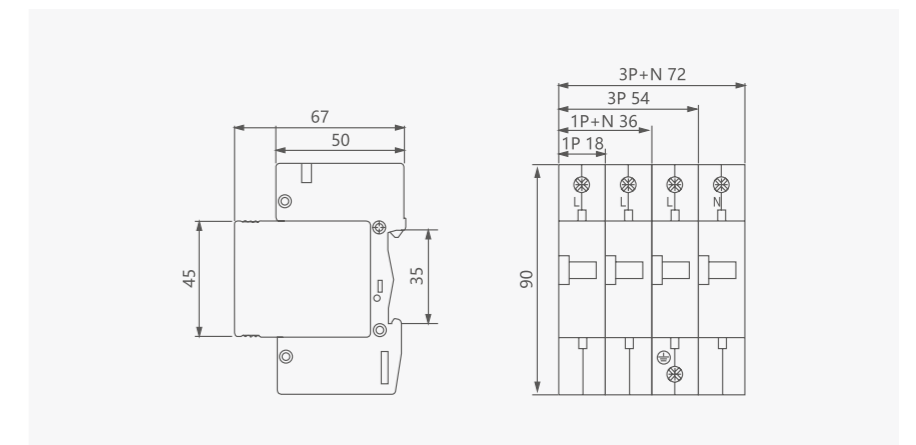

# YCCH6 (YCCH7) Modular Contactor (Manual Automatic Integration)



YCCH6-25/40  
(Automatic type)



YCCH6-63/40  
(Automatic type)



YCCH7-63/20  
(Manual automatic integration)



YCCH7-63/40  
(Manual automatic integration)

### General

- YCCH6/YCCH7 series AC contactor (hereinafter referred to as the household appliances control a contactor) is used for remote switch on and off without a sense of feeling or low load, resistance furnace, household appliances and similar low load, motor and other household.
- The main contactor is used in AC 50Hz/60Hz, rated voltage to 400V, rated current of power system to 100A, AC-1, AC-7a (in no sense or sense of low load, resistance furnace, household appliances and similar low load) categories, long distance switch and control circuit.
- Contactors are not used for breaking short circuit current, so it is necessary to choose suitable short circuit protection electrical equipment.  
Standard: IEC/EN 61095

### Selection Guidance

YCCH6	—	63	11
Product name	—	Rated current	Contact type
Household contactor : YCCH6 YCCH7	—	16	11: 1NO+1NC
	—	20	20: 2NO
	—	25	02: 2NC
	—	32	22: 2NO+2NC
	—	40	31: 3NO+1NC
	—	63	13: 1NO+3NC
—	100	40: 4NO	04: 4NC


### Technical data

Parameter	Specification								
	16	20	25	32	40	63	100		
Rated Current In(A)	AC-7a	16	20	25	32	40	63	100	
	AC-7b	6	7	9	12	18	25	32	
Conventional Free Air Thermal Current Ith (A)	16	20	25	32	40	63	100		
Rated Insulation Voltage Ui (V)	500								
Rated Voltage Ue (V)	250V (2P) 400V (4P)								
Ambient Temperature	-5°C~40°C								
Making and Breaking Capacity (AC-7a)	1.5Ie								
Main Contacts	2P	1NO 1NC, 2NO, 2NC							
	4P	2NO 2NC, 3NO 1NC, 4NO, 4NC							
Controlled power	AC-7a	230V	3.5	4.5	5.5	7	9	14	22
		400V	11	13.5	17	22	27	40	69
	AC-7b	230V	1.2	1.5	2	2.5	4	5.5	6.5
		400V	4	4.5	6	8	12	17	27
Electrical durability (times)	10×10 <sup>4</sup>								
Mechanical durability (times)	100×10 <sup>4</sup>								
Operation frequency/1h	100								
Coil Voltage Us (V)	AC 230V 50/60Hz								
Wiring Ability (mm <sup>2</sup> )	Control circuit	Rigid wire	1.5~2.5mm <sup>2</sup>				2×1.5mm <sup>2</sup>		
		Flexible wire	1.5~2.5mm <sup>2</sup>				2×2.5mm <sup>2</sup>		
	Main circuit	Rigid wire	1.5~6mm <sup>2</sup>				6~25mm <sup>2</sup>		
		Flexible wire	1~4mm <sup>2</sup>				6~16mm <sup>2</sup>		
Fastening torque (N·m)	Main circuit terminal	0.8				3.5			
	Control circuit terminal	0.8							


# YCCH6 (YCCH7) Modular Contactor (Manual Automatic Integration)



### Operation (Manual Operation Contactor)

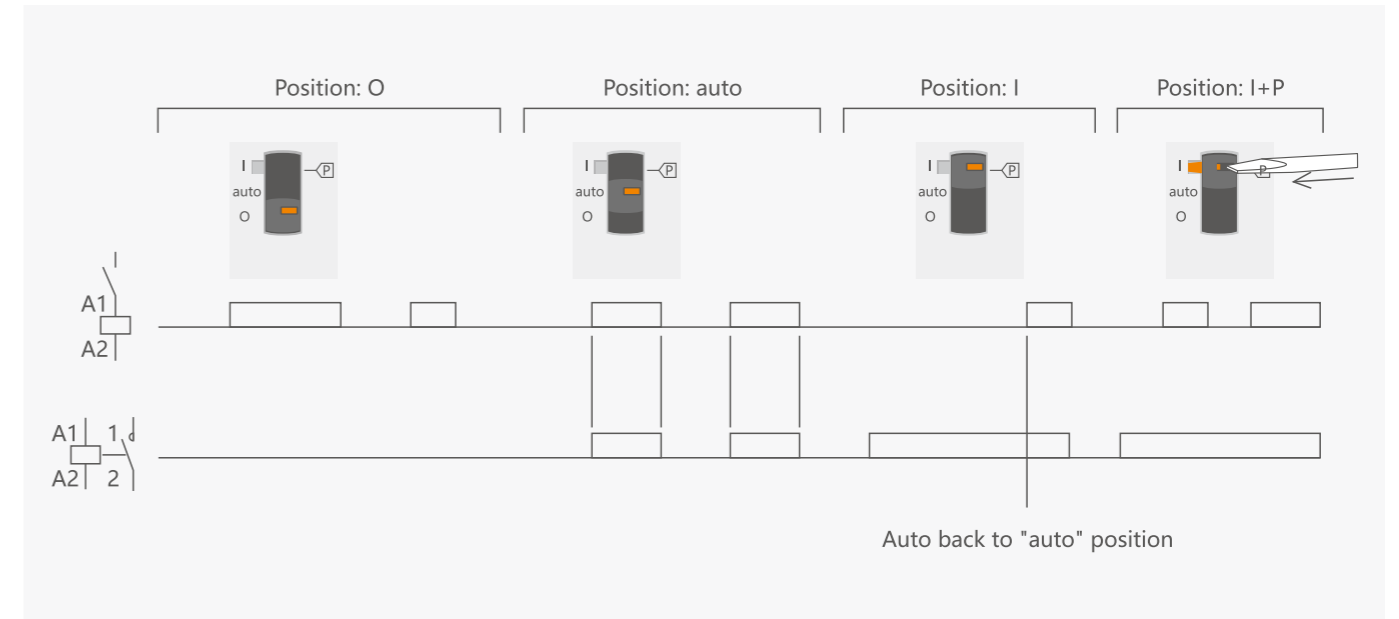

### Overall and mounting dimensions(mm)

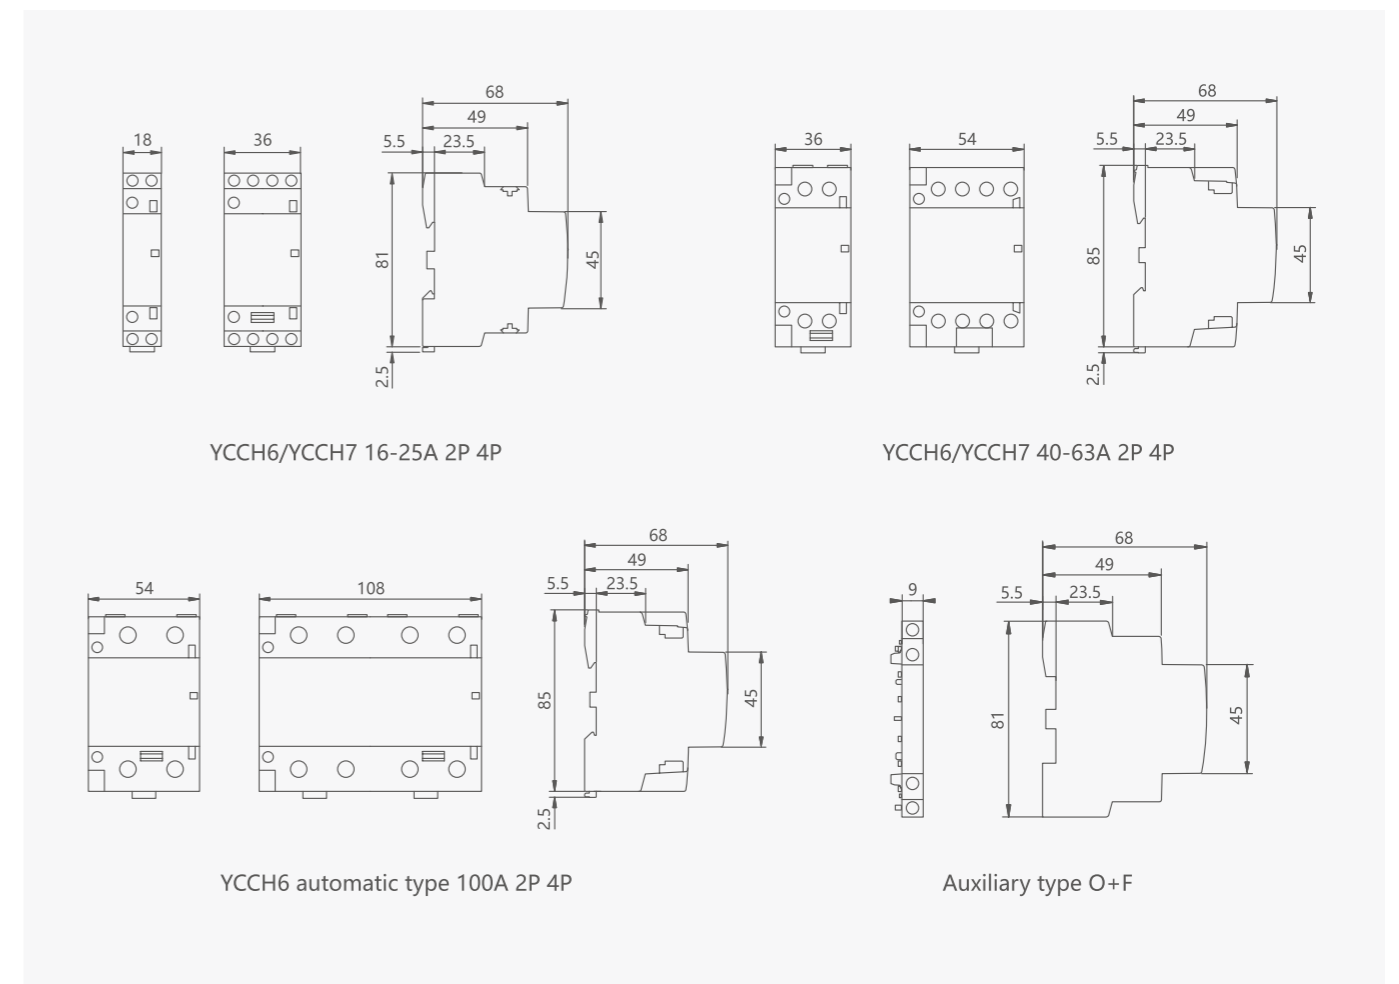

Modular DIN Rail


**YCCH6 (YCCH7) Modular Contactor (Manual Automatic Integration)**

A




YCCH6-32/20  
(Automatic type)


Overall and mounting dimensions(mm)

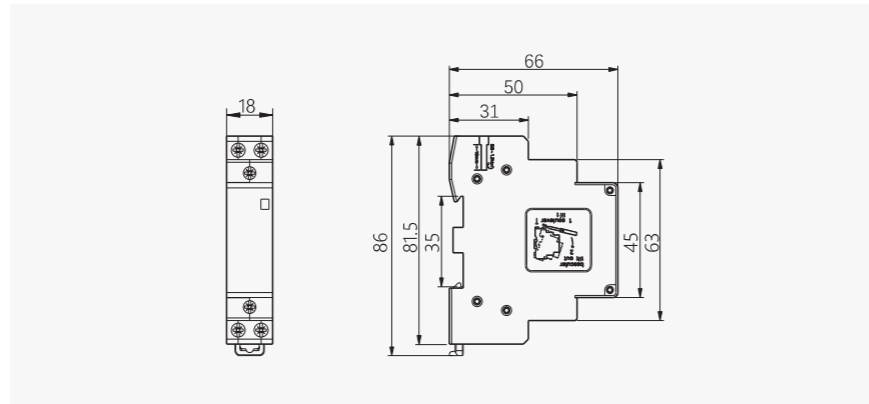

YCCH6-63SNO  
(Automatic type)

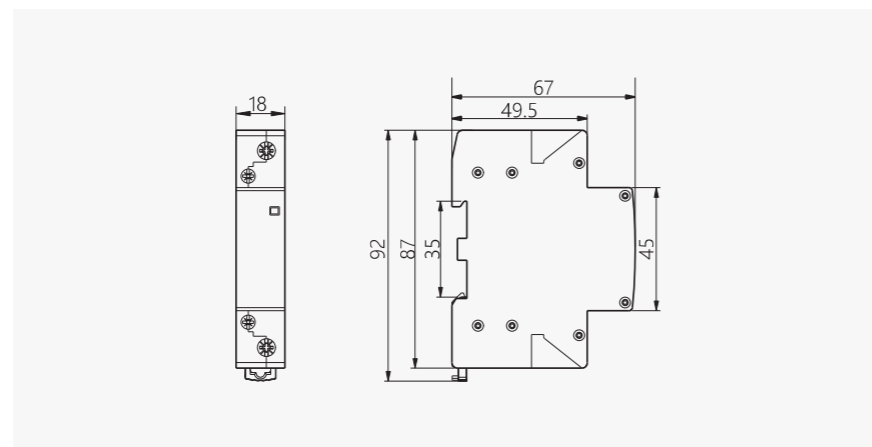

Mounting accessories

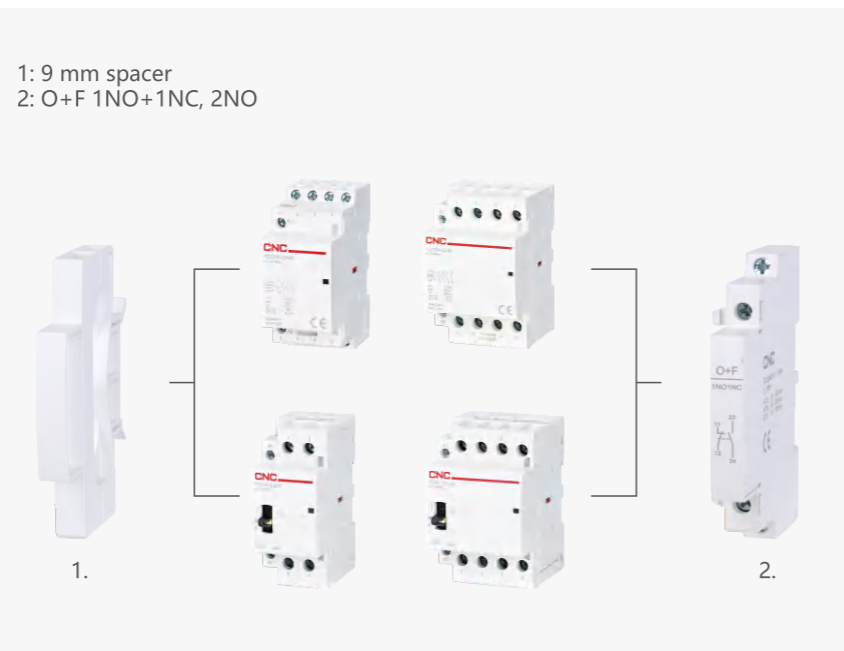


Modular DIN Rail

**YCX1 Surface Mount Distribution Box**

A



Overall and mounting dimensions(mm)

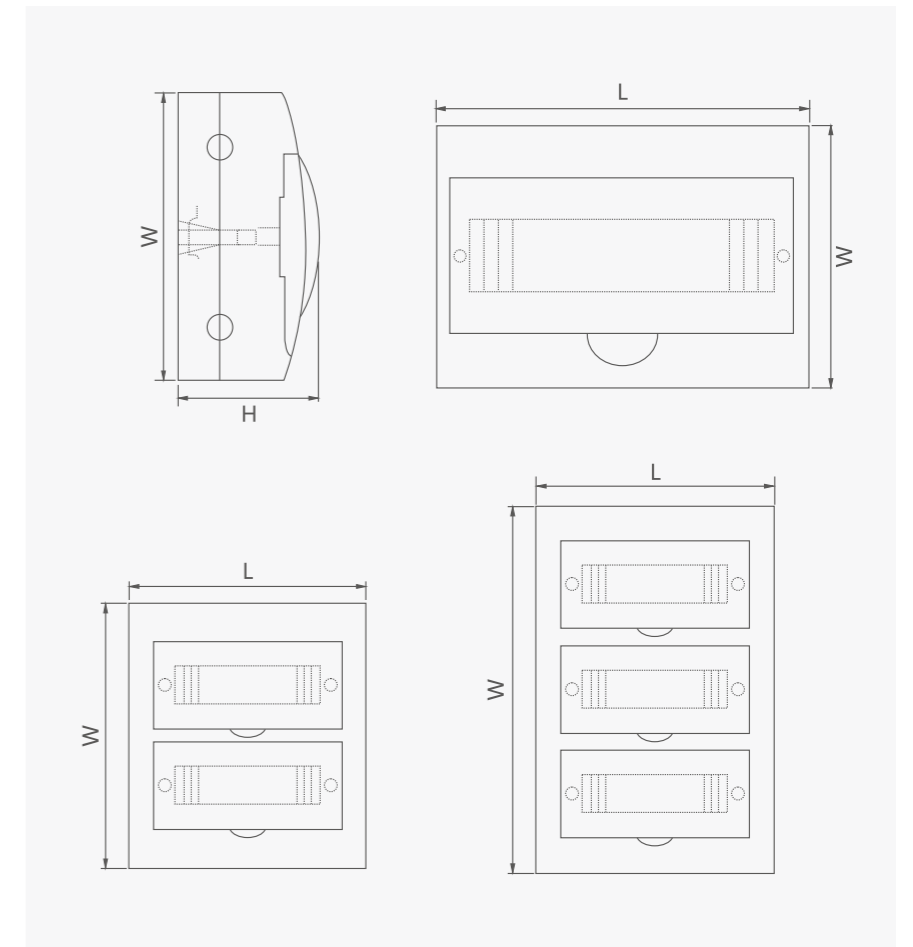

Specification	Dimension	L	W	H
YCX1-4WAYS		112	200	95
YCX1-6WAYS		148	200	95
YCX1-8WAYS		184	200	95
YCX1-10WAYS		222	200	95
YCX1-12WAYS		256	200	95
YCX1-15WAYS		310	200	95
YCX1-18WAYS		365	222	95
YCX1-24WAYS		271	325	97
YCX1-36WAYS		271	462	100




**YCX2 Flush Mount Distribution Box**

A



Overall and mounting dimensions(mm)

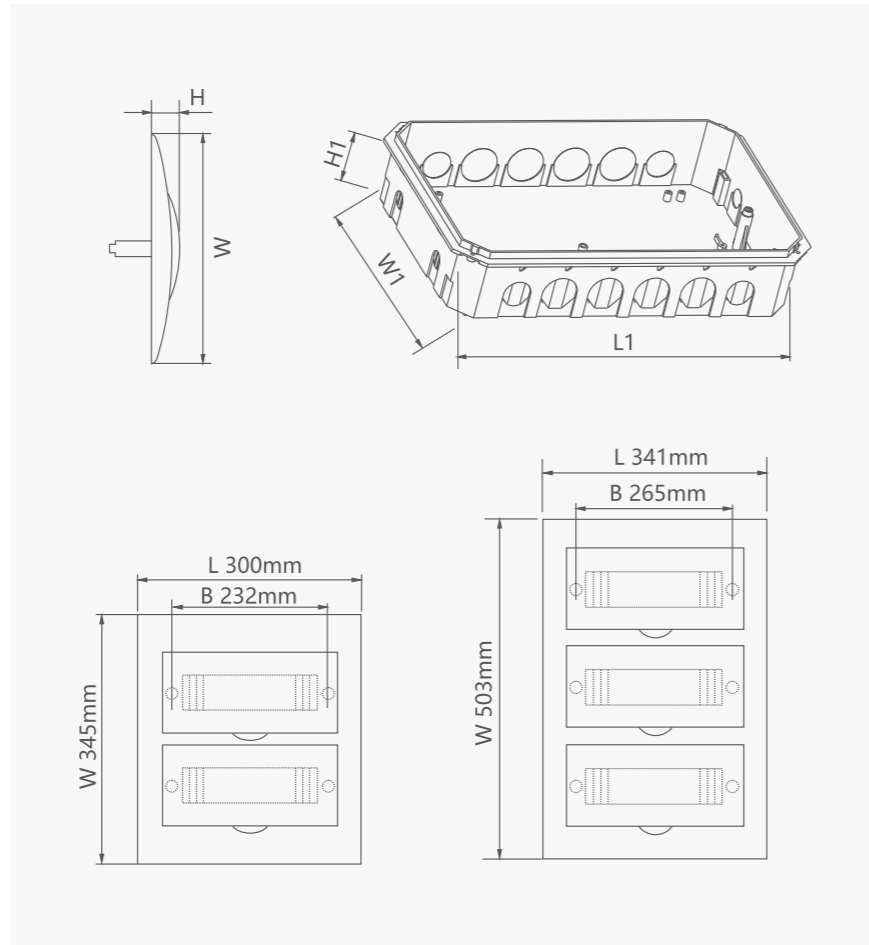


Specification	Dimension	L1	W1	H1	L	W	H
YCX2-4WAYS		115	197	60	136	222	27
YCX2-6WAYS		148	197	60	170	222	27
YCX2-8WAYS		184	197	60	207	222	27
YCX2-10WAYS		222	197	60	243	222	27
YCX2-12WAYS		258	197	60	279	222	27
YCX2-15WAYS		310	197	60	334	222	27
YCX2-18WAYS		365	219	67	398	251	27
YCX2-24WAYS		258	310	66	300	345	27
YCX2-36WAYS		258	449	66	300	484	27

**YCX3 Surface Mount Distribution Box**

A



Overall and mounting dimensions(mm)

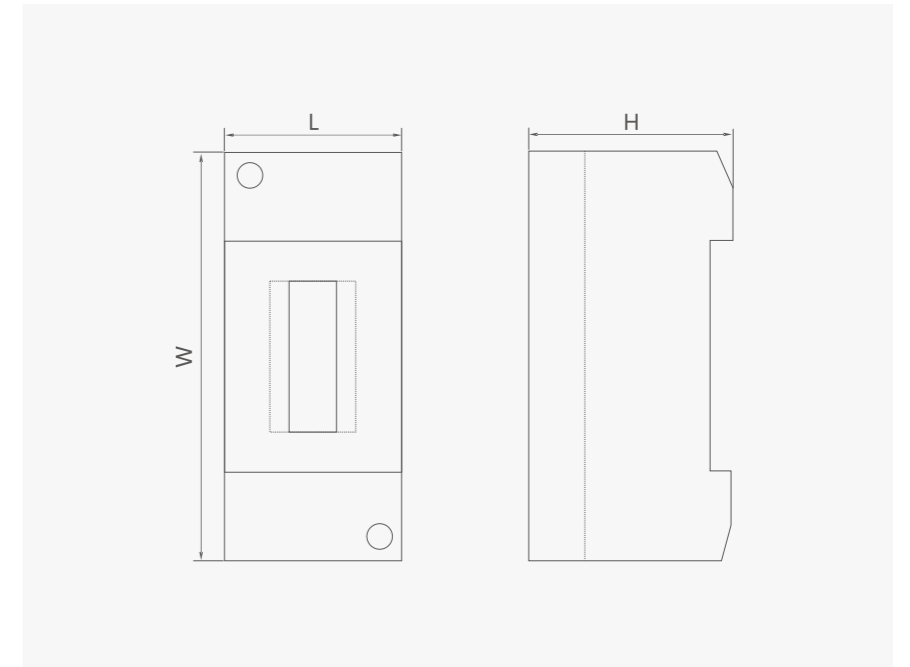

Specification	Dimension	L	W	H
YCX3-1WAYS		34	130	60
YCX3-2WAYS		52	130	60
YCX3-4WAYS		87	130	60
YCX3-6WAYS		123	130	60
YCX3-8WAYS		160	130	60

## YCX6 Lighting Distribution Box



### General

YCX6 is applicable to residential buildings or places for non-professional people to enter, it includes control equipment and signal equipment. It is applicable to the circuit with an alternating current, the nominal voltage to earth does not exceed 380V, the output circuit is with short circuit protection function. When the total input load current does not exceed 125A, the rated current of each short circuit protection device shall not exceed 63A. This product is with plastic cover and metal box, mainly used to following conditions:

- power distribution system

Building electrical distribution system, house renovation and decoration.


- installation mode

The metal box matched with the plastic cover, is especially suitable for flush mounting of distribution box in construction and decoration projects.

- appearance design

The stylish appearance design is suitable for high-end residences, hotels and office buildings, etc., which shows the taste of modern life.

### Overall and mounting dimensions(mm)

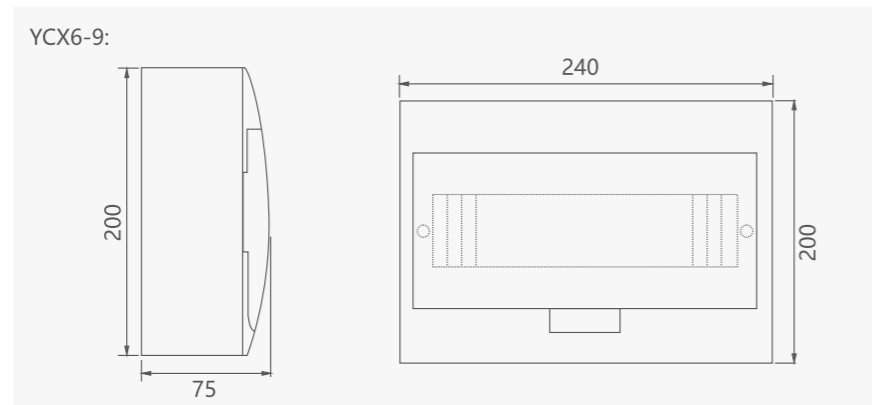

Product mode	Rows	No. of units	Surface mounting dimension	Flush mounting dimension(hole size)
YCX6-9	1	9	240×200×75	217×180×75
YCX6-12	1	12	295×230×75	270×210×75
YCX6-16	1	16	360×230×75	340×210×75
YCX6-20	1	20	438×230×75	413×210×75
YCX6-24	2	24	295×460×75	270×440×75
YCX6-32	2	32	366×460×75	340×440×75
YCX6-36	3	36	295×690×75	270×670×75
YCX6-40	2	40	438×460×75	413×440×75
YCX6-48	3	48	366×690×75	340×670×75
YCX6-60	3	60	438×690×75	438×670×75

## HA Waterproof Distribution Box (IP65)



### General


HA Series waterproof box is attractive and durable, safe and reliable, which is widely used in various places such as factory, mansion, residence, shopping center and so on.

Standard: IEC-493-1.

### Features

1. The panel is the ABS material for the engineering with high strength whose color would never change, and the transparent material is PC.  
Face covering of the distribution box adopts the push-type opening and closing mode, the face mask can be opened by pressing lightly, the self-locking positioning hinge structure is provided when opening.
2. Cover push-type opening and closing  
The guide rail support plate can be lifted to the highest movable point, it is no longer limited by the narrow space when installing the wire. To install easily, the switch of the distribution box is set up with the wire groove and wire pipe exit holes.
3. Wiring design of the power distribution box  
To install easily, the switch of the distribution box is set up with the wire groove and wire pipe exit holes, with various types applicable.

### Overall and mounting dimensions(mm)

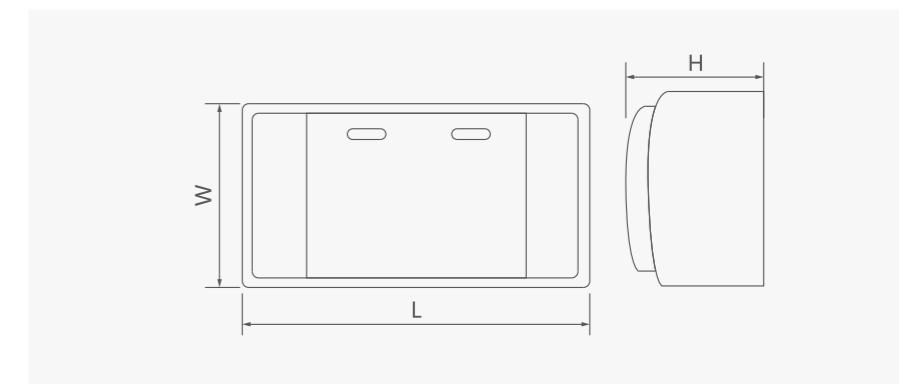

Model	Dimension(mm)		
	L(mm)	W(mm)	H(mm)
HA-4P	140	210	100
HA-8P	215	210	100
HA-12P	300	260	140
HA-18P	410	285	140
HA-24P	415	300	140

## SH-Q3 Water Proof Junction Box

A




### General

It is made of materials such as ABS and PC, etc, elegant external shape, high firmness. Combined body and cover are fixed with four plastic screws that will not fall off easily. Its specification and size can be designed based on the customer requirements. Economic and affordable. Net weight only accounts for the iron box of about 1/4, to facilitate handling and operation, no corrosion, good insulation.

Waterproof junction box purpose: electrical, electronics, communication, fire fighting equipment, control panel, terminal box, large factory, coastal plant, environmental hazard facility, etc.

Materials can be selected according to the customer's requirements.


### Overall and mounting dimensions(mm)

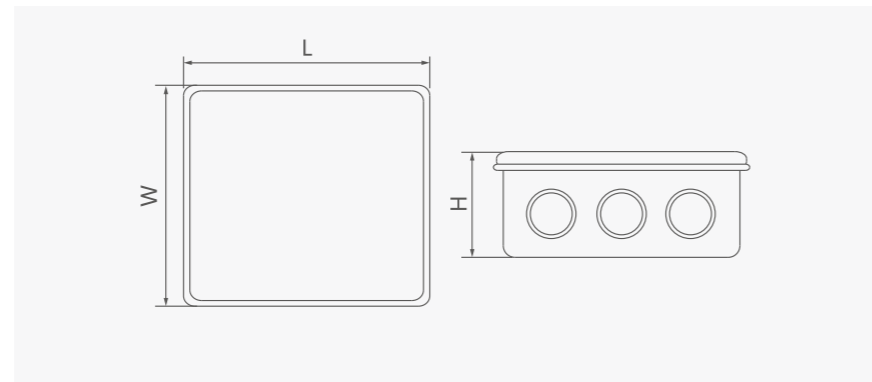

Model	Dimension(mm)		
	L(mm)	W(mm)	H(mm)
SH-Q3-801	Φ50	/	30
SH-Q3-802	Φ50	/	50
SH-Q3-803	Φ80	/	50
SH-Q3-804	80	80	50
SH-Q3-805	85	85	50
SH-Q3-806	100	100	70
SH-Q3-807	150	110	70
SH-Q3-808	150	150	70
SH-Q3-809	200	100	110
SH-Q3-8010	200	155	80
SH-Q3-8011	200	100	70
SH-Q3-8012	200	200	80
SH-Q3-8013	255	200	80
SH-Q3-8014	300	250	120
SH-Q3-8015	400	350	120

## YCS1 Enclosure

A

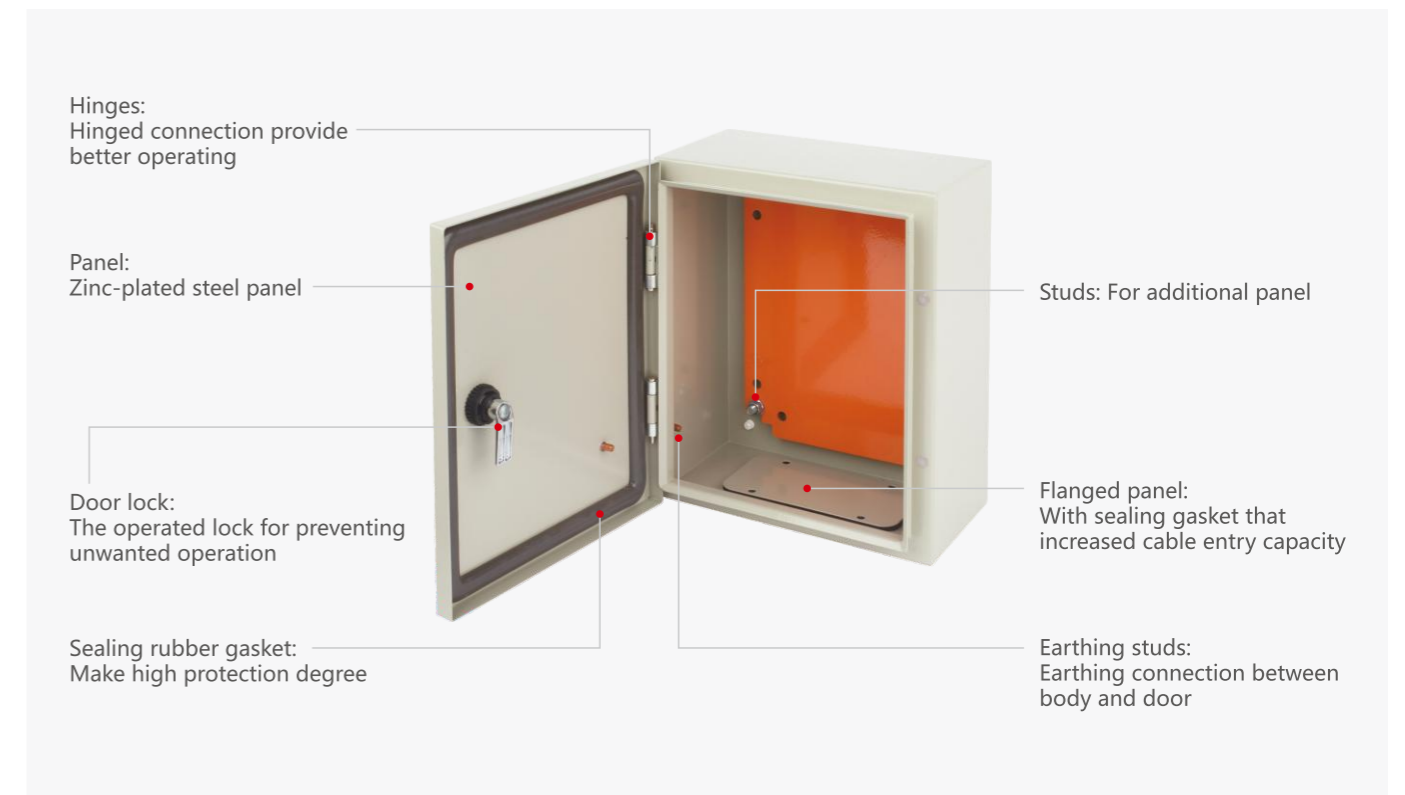

### General

The Wall Mounting Enclosure is designed with all kinds of Electrical switch gear & control gear assemblies. It is suitable for a variety of Electrical installations in commercial & light industrial premises. For indoor&outdoor applications usage.

Rated voltage: 230V/400V

Frequency: 50/60Hz

Protection degree: IP66

Standard: IEC-62208

### Features

Material:

The shell is made of high-quality electro-galvanized steel with a thickness of up to 1.5mm; the mounting plate is made of 2mm GI steel or RAL 2000; the hinge is a 2.0-thick cold-rolled plate galvanized pin type; it meets high standards and high requirements.

Process:

Adopt pickling and phosphating, which is stronger in anti-corrosion and anti-rust; full welding process, higher product strength; dispensing process, meeting IP65 requirements

Protection:

Zinc alloy waterproof door lock; the door lock is a zinc alloy inner core waterproof lock; sealed rubber pad, double insulation, excellent outdoor performance.

Surface: The shell is sprayed in two colors of 7035/7032, the bottom plate is 5060 orange, eye-catching international standards, and the spraying standard reaches 60-80μ.

Design: Corner-molded lids ensure better rain protection and great looks, and the 3-point cam lock for larger size can ensure uniform locking on the whole length.

Flexible installation: the direction of the door panel can be reversed left and right, the bottom cover can be detached, and the ceiling can be fixed as an optional part.

Conforms to IEC standard.

**Modular DIN Rail**  
**YCS1 Enclosure**

**A**



Model	H (mm)	W (mm)	D (mm)	Thickness		
				Door/mm	Body/mm	M.P/mm
YCS1-2020/15	200	200	150	1.2	1.2	2
YCS1-2520/15	250	200	150	1.2	1.2	2
YCS1-3020/15	300	200	150	1.2	1.2	2
YCS1-3020/20	300	200	200	1.2	1.2	2
YCS1-3025/15	300	250	150	1.2	1.2	2
YCS1-3025/20	300	250	200	1.2	1.2	2
YCS1-3025/25	300	250	250	1.2	1.2	2
YCS1-3030/15	300	300	150	1.2	1.2	2
YCS1-3030/20	300	300	200	1.2	1.2	2
YCS1-3030/25	300	300	250	1.2	1.2	2
YCS1-4030/15	400	300	150	1.2	1.2	2
YCS1-4030/20	400	300	200	1.2	1.2	2
YCS1-4030/25	400	300	250	1.2	1.2	2
YCS1-4030/30	400	300	300	1.2	1.2	2
YCS1-4040/15	400	400	150	1.2	1.2	2
YCS1-4040/20	400	400	200	1.2	1.2	2
YCS1-4040/25	400	400	250	1.2	1.2	2
YCS1-4040/30	400	400	300	1.2	1.2	2
YCS1-5030/15	500	300	150	1.2	1.2	2
YCS1-5030/20	500	300	200	1.2	1.2	2
YCS1-5030/25	500	300	250	1.2	1.2	2
YCS1-5030/30	500	300	300	1.2	1.2	2
YCS1-5040/15	500	400	150	1.2	1.2	2
YCS1-5040/20	500	400	200	1.2	1.2	2
YCS1-5040/25	500	400	250	1.2	1.2	2
YCS1-5040/30	500	400	300	1.2	1.2	2
YCS1-5050/15	500	500	150	1.2	1.2	2
YCS1-5050/20	500	500	200	1.2	1.2	2
YCS1-5050/25	500	500	250	1.2	1.2	2
YCS1-5050/30	500	500	300	1.2	1.2	2
YCS1-6040/15	600	400	150	1.2	1.2	2
YCS1-6040/20	600	400	200	1.2	1.2	2
YCS1-6040/25	600	400	250	1.2	1.2	2
YCS1-6040/30	600	400	300	1.2	1.2	2
YCS1-6050/15	600	500	150	1.2	1.2	2
YCS1-6050/20	600	500	200	1.2	1.2	2
YCS1-6050/25	600	500	250	1.2	1.2	2
YCS1-6050/30	600	500	300	1.2	1.2	2
YCS1-6060/15	600	600	150	1.2	1.2	2
YCS1-6060/20	600	600	200	1.2	1.2	2
YCS1-6060/25	600	600	250	1.2	1.2	2
YCS1-6060/30	600	600	300	1.2	1.2	2
YCS1-7040/20	700	400	200	1.2	1.2	2

**Modular DIN Rail**  
**YCS1 Enclosure**

**A**



Model	H (mm)	W (mm)	D (mm)	Thickness		
				Door/mm	Body/mm	M.P/mm
YCS1-7040/30	700	400	300	1.2	1.2	2
YCS1-7050/15	700	500	150	1.2	1.2	2
YCS1-7050/20	700	500	200	1.2	1.2	2
YCS1-7050/25	700	500	250	1.2	1.2	2
YCS1-7050/30	700	500	300	1.2	1.2	2
YCS1-7060/20	700	600	200	1.2	1.2	2
YCS1-7060/25	700	600	250	1.2	1.2	2
YCS1-7060/30	700	600	300	1.2	1.2	2
YCS1-8060/20	800	600	200	1.5	1.5	2
YCS1-8060/25	800	600	250	1.5	1.5	2
YCS1-8060/30	800	600	300	1.5	1.5	2
YCS1-8060/35	800	600	350	1.5	1.5	2
YCS1-8060/40	800	600	400	1.5	1.5	2
YCS1-8080/20	800	800	200	1.5	1.5	2
YCS1-8080/25	800	800	250	1.5	1.5	2
YCS1-8080/30	800	800	300	1.5	1.5	2
YCS1-8080/40	800	800	400	1.5	1.5	2
YCS1-10060/20	1000	600	200	1.5	1.5	2
YCS1-10060/25	1000	600	250	1.5	1.5	2
YCS1-10060/30	1000	600	300	1.5	1.5	2
YCS1-10070/20	1000	700	200	1.5	1.5	2
YCS1-10080/20	1000	800	200	1.5	1.5	2
YCS1-10080/25	1000	800	250	1.5	1.5	2
YCS1-10080/30	1000	800	300	1.5	1.5	2
YCS1-10080/40	1000	800	400	1.5	1.5	2
YCS1-100100/25	1000	1000	250	1.5	1.5	2
YCS1-100100/30	1000	1000	300	1.5	1.5	2
YCS1-12060/20	1200	600	200	1.5	1.5	2
YCS1-12060/25	1200	600	250	1.5	1.5	2
YCS1-12060/30	1200	600	300	1.5	1.5	2
YCS1-12080/20	1200	800	200	1.5	1.5	2
YCS1-12080/25	1200	800	250	1.5	1.5	2
YCS1-12080/30	1200	800	300	1.5	1.5	2
YCS1-120100/25	1200	1000	250	1.5	1.5	2
YCS1-120100/30	1200	1000	300	1.5	1.5	2
YCS1-120100/40	1200	1000	400	1.5	1.5	2
YCS1-120120/25	1200	1200	250	1.5	1.5	2
YCS1-120120/30	1200	1200	300	1.5	1.5	2
YCS1-14060/30	1400	600	300	1.5	1.5	2
YCS1-14080/30	1400	800	300	1.5	1.5	2
YCS1-14080/40	1400	800	400	1.5	1.5	2
YCS1-140100/30	1400	1000	300	1.5	1.5	2
YCS1-140100/40	1400	1000	400	1.5	1.5	2
YCS1-140120/30	1400	1200	300	1.5	1.5	2




## Modular DIN Rail

### Busbar


#### Busbar Pin

Material: Copper


Features: good conductivity, low contact resistance, safe and reliable performance.

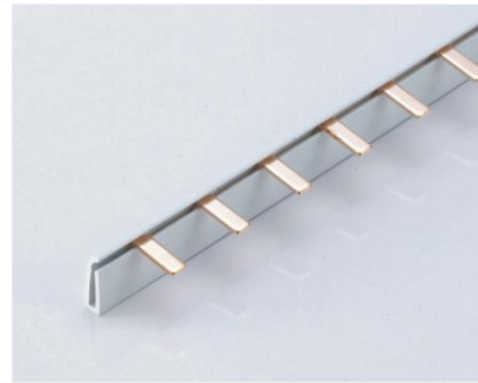

PIN 1P

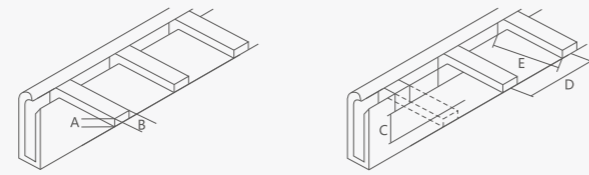


Specification	Model	A	B	C	D	E	Reference current
PIN	1P-63	1.4	4	7	17.8	11.5	63A
PIN	1P-80	1.5	4	9	17.8	11.5	80A
PIN	1P-100	1.7	4	9	17.8	11.5	100A

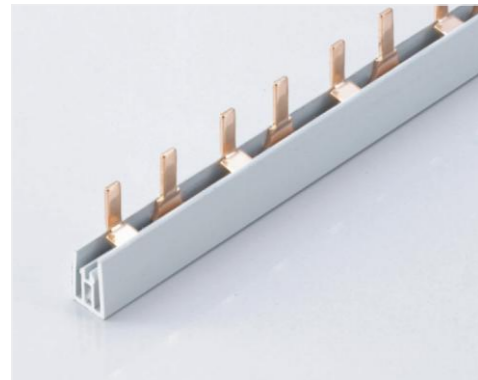

PIN 2P



Specification	Model	A	B	C	D	E	Reference current
PIN	2P-63	1.4	4	7	17.8	11.5	63A
PIN	2P-80	1.5	4	9	17.8	11.5	80A
PIN	2P-100	1.8	4	9	17.8	11.5	100A

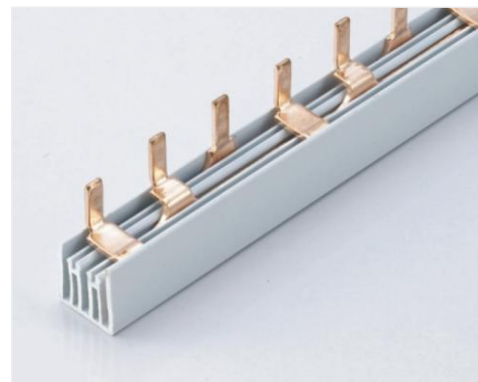

PIN 3P



Specification	Model	A	B	C	D	E	Reference current
PIN	3P-63	1.4	4	7	17.8	11.5	63A
PIN	3P-80	1.5	4	9	17.8	11.5	80A
PIN	3P-100	1.8	4	9	17.8	11.5	100A


## Modular DIN Rail

### Busbar


#### Busbar Pin

Material: Copper

Features: good conductivity, low contact resistance, safe and reliable performance.

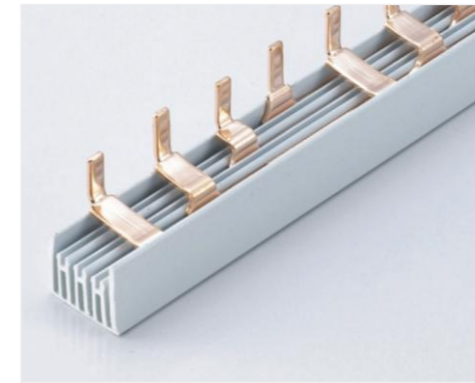

PIN 4P

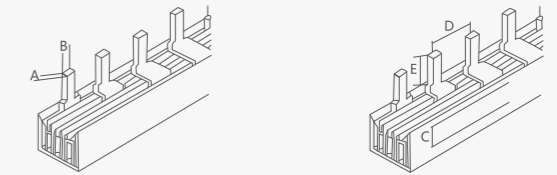


Specification	Model	A	B	C	D	E	Reference current
PIN	4P-63	1.4	4	7	17.8	11.5	63A
PIN	4P-80	1.5	4	9	17.8	11.5	80A
PIN	4P-100	1.8	4	9	17.8	11.5	100A


#### Busbar Fork

Material: Copper


Features: good conductivity, low contact resistance, safe and reliable performance.

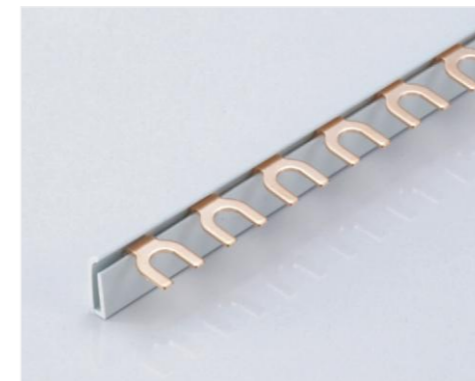


FORK 1P

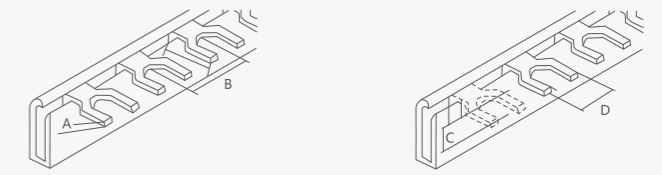

Specification	Model	A	B	C	D	E	F	Reference current
FORK	1P-63	1.4	17.8	7	12	6	12	63A
FORK	1P-80	1.5	17.8	9	12	6	12	80A
FORK	1P-100	1.8	17.8	9	12	6	12	100A

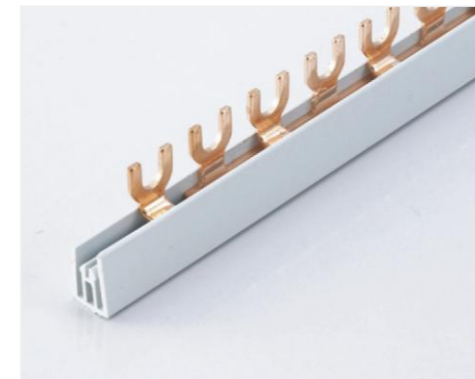

FORK 2P

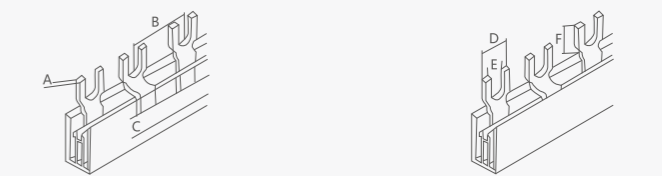

Specification	Model	A	B	C	D	E	F	Reference current
FORK	2P-63	1.4	17.8	7	12	6	12	63A
FORK	2P-80	1.5	17.8	9	12	6	12	80A
FORK	2P-100	1.8	17.8	9	12	6	12	100A


## Modular DIN Rail

### Busbar


#### Busbar Fork

Material: Copper


Features: good conductivity, low contact resistance, safe and reliable performance.

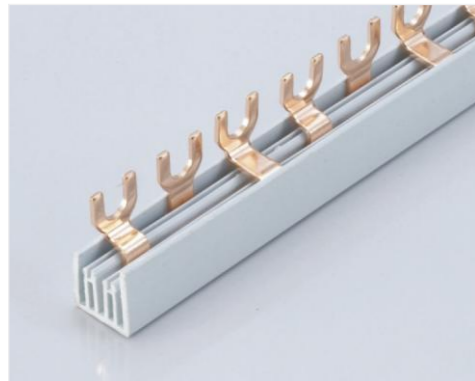


FORK 3P

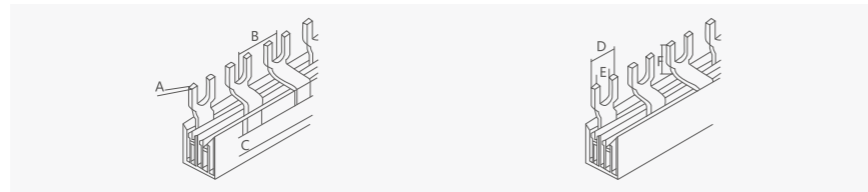

Specification	Model	A	B	C	D	E	F	Reference current
FORK	3P-63	1.4	17.8	7	12	6	12	63A
FORK	3P-80	1.5	17.8	9	12	6	12	80A
FORK	3P-100	1.8	17.8	9	12	6	12	100A

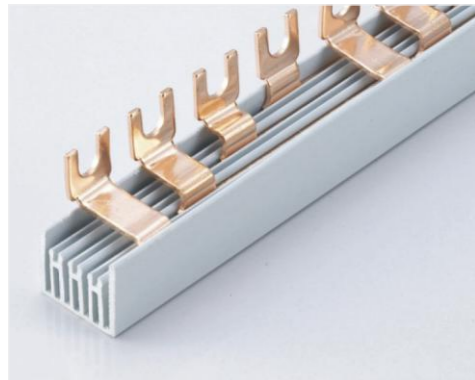

FORK 4P

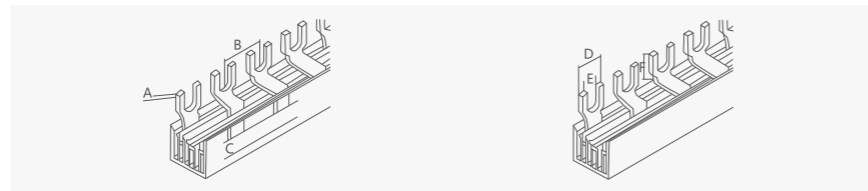

Specification	Model	A	B	C	D	E	F	Reference current
FORK	4P-63	1.4	17.8	7	12	6	12	63A
FORK	4P-80	1.5	17.8	9	12	6	12	80A
FORK	4P-100	1.8	17.8	9	12	6	12	100A

## Modular DIN Rail

### Rt18 Low Voltage Fuse

#### General

RT18 Cylindrical contact caps fuse protector is applicable to the distribution equipment with AC 50Hz, rated voltage of 500V and rated current not more than 125A for circuit overload and short-circuit protection (NT fuse protector is recommended to be used in capacitor box instead of this kind of fuse protector).

Neon light and resistors constitute fusing signal device of fuse link of fuse protector pedestal (symbol "X").

Rt18 fuse link is divided into "gG" and "aM" type; "gG" is ordinary fuse protector with full range of breaking capacity, while "aM" is fuse protector for the protection of motor with partial breaking capacity.

Standard: IEC 60269.




RT18-32X



RT18-32

#### Type designation

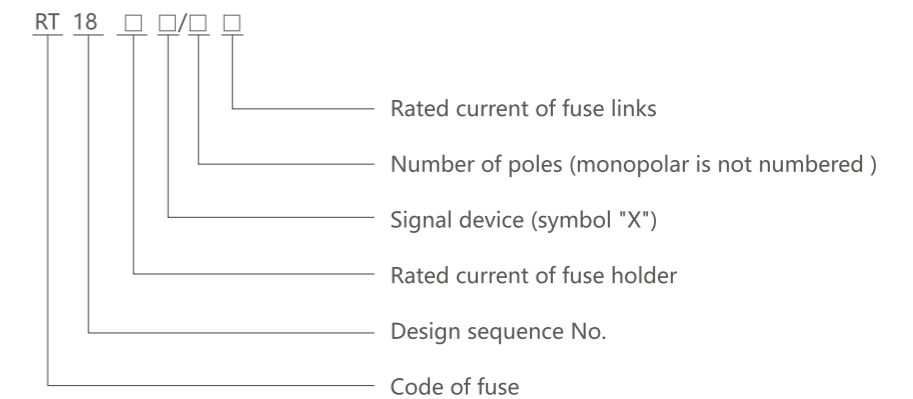


#### Technical data

##### Parameters of fuse holder

RT18

Type	Assorted Fuse	Rated voltage (V)	Rated Current (A)	Dimension (mm)				
				A	B	C	D	E
RT18-32(32X) 1P	10×38	380	32	82	78	35	63	18
RT18-32(32X) 2P			32	82	78	35	63	36
RT18-32(32X) 3P			32	82	78	35	63	54
RT18-63(63X) 1P	14×51		63	106	103	35	80	26
RT18-63(63X) 2P			63	106	103	35	80	52
RT18-63(63X) 3P			63	106	103	35	80	78

#### Overall and mounting dimensions(mm)

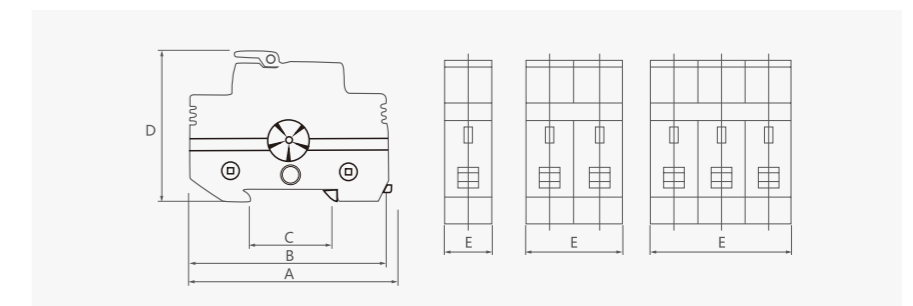

RT18L Low Voltage Fuse

A




RT18L-125

RT18L

Type	Assorted Fuse	Number of Poles	Rated voltage (V)	Conventional heating current (A)	Dimension (mm)				
					A1	A2	B	H1	H2
RT18L-63	14×51	1,2,3,4	690	63	108	115	27	78	100
RT18L-125	22×58			125	126	134	36	78	104

Overall and mounting dimensions(mm)

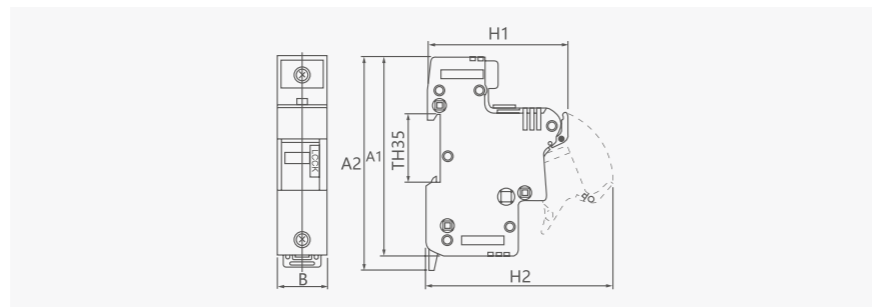

Parameters of fuse links

Fuse Link

Dimension (mm)	Rated current (A)	Breaking capacity(kA)	L	ΦC
8.5×31.5	2,4,6,10,16	100	31.5 <sup>+0</sup> <sub>-0.6</sub>	8.5±0.1
10×38	2,4,6,10,16,20,25,32		31.5±0.6	10.3±0.1
14×51	2,4,6,10,16,20,25,32,40,50,63		51 <sup>+0.6</sup> <sub>-1.0</sub>	14.3±0.1
22×58	10,16,20,25,32,40,50,63,80,100		58 <sup>+1.0</sup> <sub>-2.0</sub>	22.2±0.1
30×58	63,80,100,125		58 <sup>+1.0</sup> <sub>-2.0</sub>	30±0.1



Fuse Link

Overall and mounting dimensions(mm)

