

Features


Used for control of time order
 With front-surface and
 back-surface connecting sockets
 LED pilot, display action state



AH3-3

Model Meaning

AH3 - 1/2/3 6S AC220V

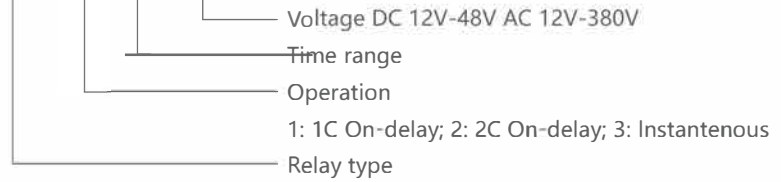

Specification

| Item No. | Data |
|------------------------|---|
| Voltage | DC12V-48V AC12V-380V50HZ |
| Power expend | DC1.0W AC1.0VA |
| Control output | 5A 220V AC |
| Insulation Resistance | DC500V 100MΩ |
| Dielectric Strength | BCC1500VAC BOC1000VAC |
| Operating Temperature | -10°C~50°C |
| Humidity | 35%~85% |
| Life | Mech:10 ⁷ Elec:10 ³ |
| Weight | ≈ 160g |
| Installing Holing Size | 40×50mm |

Time Range

| Rated time | Time range | Rated time | Time range |
|------------|------------|------------|------------|
| 1s | 0.1S~1S | 6m | 0.3m~6m |
| 2s | 0.1S~2S | 12m | 0.6m~12m |
| 3s | 0.1S~3S | 30m | 1m~30m |
| 6s | 0.2S~6S | 60m | 2m~60m |
| 10s | 0.6S~10S | 3h | 0.1h~3h |
| 30s | 1.0S~30S | 6h | 0.2~6h |
| 60s | 2.0S~60S | 10h | 0.25~10h |
| 2m | 5.0S~2m | 24h | 0.8~24h |
| 3m | 0.1m~3m | 30h | 1~30h |

Dimension

