



Test Report issued under the responsibility of:



L C I E

TEST REPORT
IEC 60898-1
Circuit-breakers for over current protection for
household and similar installations
Part 1 - Circuit-breakers for a.c. operation

Report Number..... : B210068
Date of issue..... : 2021-09-28
Total number of pages 130 pages

Name of Testing Laboratory preparing the Report : The Comprehensive Technical Service Center (Yueqing Branch) of Wenzhou Customs

Applicant's name : Changcheng Electrical Group Zhejiang Technology Co., Ltd.
Address..... : DianHou Village, Liushi Town, Yueqing City, Zhejiang, Zip Code: 325604 - China

Test specification:

Standard : IEC 60898-1:2015, AMD1:2019
Test procedure : CB Scheme
Non-standard test method : N/A

Test Report Form No. : IEC60898_1E
Test Report Form(s) Originator : DEKRA Certification B.V.
Master TRF : Dated 2020-04-17

Copyright © 2020 IEC System of Conformity Assessment Schemes for Electrotechnical Equipment and Components (IECEE System). All rights reserved.





This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.

General disclaimer:

The test results presented in this report relate only to the object tested.
This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

Test item description :	MCB	
Trade Mark(s)		
Manufacturer	Changcheng Electrical Group Zhejiang Technology Co., Ltd. DianHou Village, Liushi Town, Yueqing City, Zhejiang, Zip Code: 325604 - China	
Model/Type reference	YCB6H-63 (References list see page 10-12)	
Ratings	See pages 9 to 13	
Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):		
<input checked="" type="checkbox"/>	CB Testing Laboratory:	The Comprehensive Technical Service Center (Yueqing Branch) of Wenzhou Customs
Testing location/ address :	Inspection and Quarantine Mansion, jingang Avenue, Liushi, Yueqing, Wenzhou, Zhejiang, P.R.China	
Tested by (name, function, signature) :	Gaoke Zheng - Testing engineer Lechen HU - Testing engineer (Reviewer)	 
Approved by (name, function, signature) ... :	Xiaomu Ye - Technical manager	
<input type="checkbox"/>	Testing procedure: CTF Stage 1:	
Testing location/ address :		
Tested by (name, function, signature) :		
Approved by (name, function, signature) ... :		
<input type="checkbox"/>	Testing procedure: CTF Stage 2:	
Testing location/ address :		
Tested by (name + signature)		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ... :		
<input type="checkbox"/>	Testing procedure: CTF Stage 3:	
<input type="checkbox"/>	Testing procedure: CTF Stage 4:	
Testing location/ address :		
Tested by (name, function, signature) :		
Witnessed by (name, function, signature) .:		
Approved by (name, function, signature) ... :		
Supervised by (name, function, signature) :		

List of Attachments (including a total number of pages in each attachment):
Attachment for European group differences See Annex No.1. (Total pages 11)

Summary of testing:

Standard used:

-IEC 60898-1:2015+AMD1:2019

-EN 60898-1:2019

Tests performed (name of test and test clause):

Model		Test sequences								
In		A ₁	A ₂	B	C ₁	C ₂	D ₀ +D ₁	D ₀	E ₁	E ₂
1P Type C Icn=lcs=4500A	63A	1	3	3	3	3	3	1	3+3	-
	50A	-		-	-		-	1	-	-
	40A	-		-	-		-	1	-	-
	32A	-		-	-		-	1	-	-
	25A	-		-	-		-	1	-	-
	20A	-		-	-		-	1	-	-
	16A	-		-	-		-	1	-	-
	10A	-		-	-		-	1	-	-
	6A	-		-	-		-	1	-	-
	4A	-		-	-		-	1	-	-
	2A	-		-	-		-	1	3+3	-
2P Type C Icn=lcs=4500A	63A	-	3	-		2	-	-	3	-
	2A	-		-	-		-	-	3	-
4P Type C Icn=lcs=4500A	63A	1	3	3	3	1	3+4***	-	3	
	2A	-		-	-		-	-	3	
1P Type B Icn=lcs=4500A	63A	-		3*	-		-	1**	-	-
	50A	-		-	-		-	1**	-	-
	40A	-		-	-		-	1**	-	-
	32A	-		-	-		-	1**	-	-
	25A	-		-	-		-	1**	-	-
	20A	-		-	-		-	1**	-	-
	16A	-		-	-		-	1**	-	-
	10A	-		-	-		-	1**	-	-
	6A	-		-	-		-	1**	-	-
	4A	-		-	-		-	1**	-	-
	2A	-		-	-		-	1**	-	-

4P Type B Icn=Ics=4500A	63A			3*						
-------------------------------	-----	--	--	----	--	--	--	--	--	--

**Only clause 9.8

*Only clause 9.10.3

***Only sequence D1

Testing location:

The Comprehensive Technical Service Center (Yueqing Branch) of Wenzhou Customs Inspection and Quarantine Mansion, jingang Avenue, Liushi, Yueqing, Wenzhou, Zhejiang, P.R.China

Summary of compliance with National Differences (List of countries addressed):

CENELEC

The product fulfils the requirements of EN 60898-1:2019

Statement concerning the uncertainty of the measurement systems used for the tests

(may be required by the product standard or client)

Internal procedure used for type testing through which traceability of the measuring uncertainty has been established:

Procedure number, issue date and title:

Calculations leading to the reported values are on file with the NCB and testing laboratory that conducted the testing.


Statement not required by the standard used for type testing

(Note: When IEC or ISO standard requires a statement concerning the uncertainty of the measurement systems used for tests, this should be reported above. The informative text in parenthesis should be delete in both cases after selecting the applicable option)


Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

1P C63

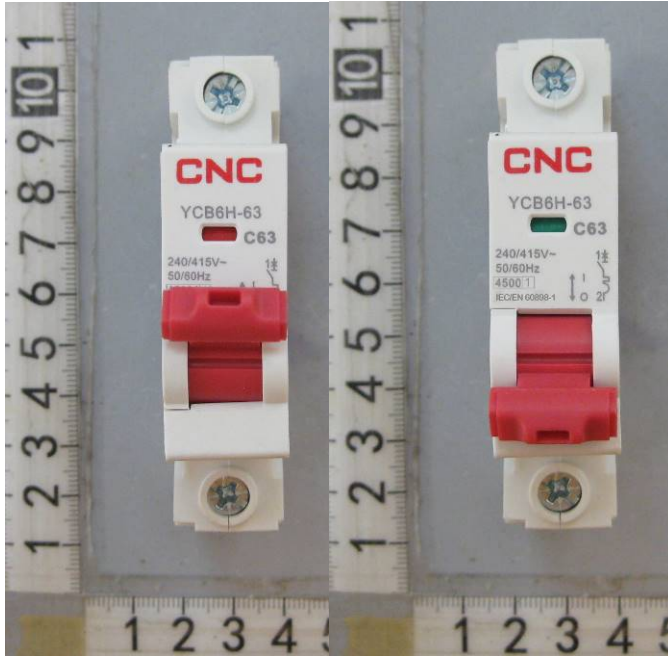

1P C63

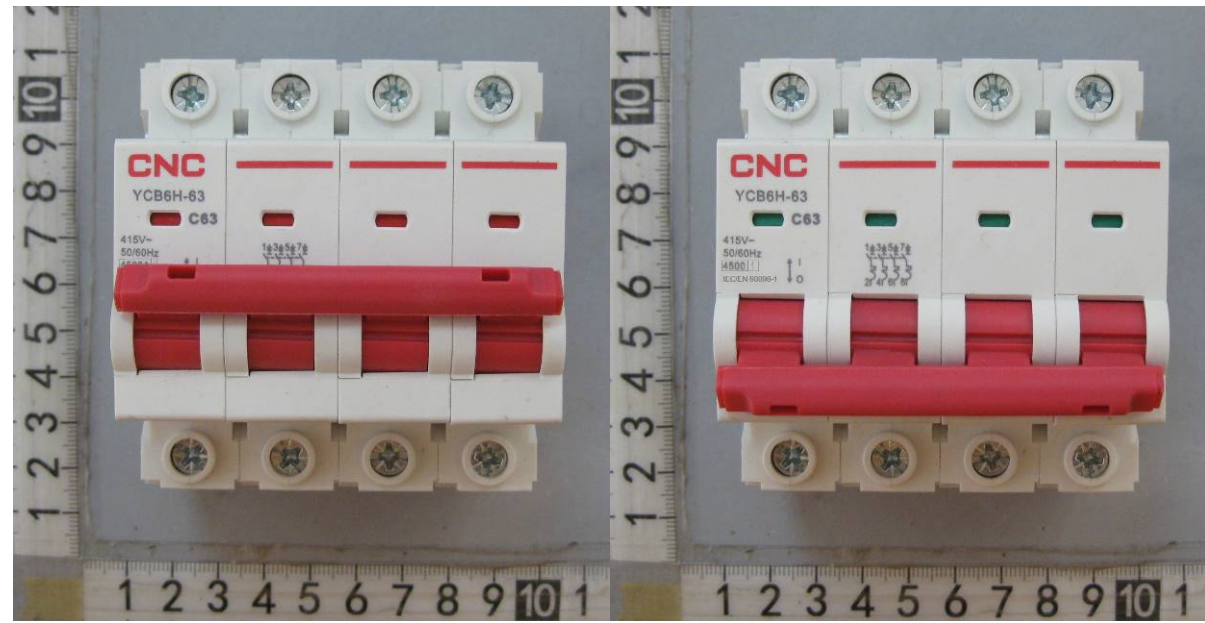

Test item particulars: MCB	
Classification of installation and use: On rail	
Supply Connection: Pillar terminals for copper conductors:	
Possible test case verdicts: - test case does not apply to the test object.....: N/A - test object does meet the requirement.....: P (Pass) - test object does not meet the requirement.....: F (Fail)	
Testing:	
Date of receipt of test item: 2021-08-06	
Date (s) of performance of tests: 2021-08-06 to 2021-09-22	
General remarks:	
"(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60898-1:	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> Not applicable
When differences exist; they shall be identified in the General product information section.	
Name and address of factory (ies): Changcheng Electrical Group Zhejiang Technology Co., Ltd. DianHou Village, Liushi Town, Yueqing City, Zhejiang, Zip Code:325604 - China	

General product information and other remarks:

Type C and B

Ue:240/415V~ for 1P; 415V for 2P/3P/4P

In=2; 4; 6;10;16;20;25;32;40; 50; 63A

Ics=Icn=4500A

Energy limit class: 1 (according to EN 60898-1)

Grid distance: 45mm

Ui=500V

Uimp=4kV

Screw diameter of terminal =4,9mm



Product references list

Description	Commercial reference	Poles	Rated Current	Curve
YCB6H-63 MCB 1P C 2A 4500A	1C0245	1P	2	C
YCB6H-63 MCB 1P C 4A 4500A	1C0445	1P	4	C
YCB6H-63 MCB 1P C 6A 4500A	1C0645	1P	6	C
YCB6H-63 MCB 1P C 10A 4500A	1C1045	1P	10	C
YCB6H-63 MCB 1P C 16A 4500A	1C1645	1P	16	C
YCB6H-63 MCB 1P C 20A 4500A	1C2045	1P	20	C
YCB6H-63 MCB 1P C 25A 4500A	1C2545	1P	25	C
YCB6H-63 MCB 1P C 32A 4500A	1C3245	1P	32	C
YCB6H-63 MCB 1P C 40A 4500A	1C4045	1P	40	C
YCB6H-63 MCB 1P C 50A 4500A	1C5045	1P	50	C
YCB6H-63 MCB 1P C 63A 4500A	1C6345	1P	63	C
YCB6H-63 MCB 2P C 2A 4500A	2C0245	2P	2	C
YCB6H-63 MCB 2P C 4A 4500A	2C0445	2P	4	C
YCB6H-63 MCB 2P C 6A 4500A	2C0645	2P	6	C
YCB6H-63 MCB 2P C 10A 4500A	2C1045	2P	10	C
YCB6H-63 MCB 2P C 16A 4500A	2C1645	2P	16	C
YCB6H-63 MCB 2P C 20A 4500A	2C2045	2P	20	C
YCB6H-63 MCB 2P C 25A 4500A	2C2545	2P	25	C
YCB6H-63 MCB 2P C 32A 4500A	2C3245	2P	32	C
YCB6H-63 MCB 2P C 40A 4500A	2C4045	2P	40	C
YCB6H-63 MCB 2P C 50A 4500A	2C5045	2P	50	C
YCB6H-63 MCB 2P C 63A 4500A	2C6345	2P	63	C
YCB6H-63 MCB 3P C 2A 4500A	3C0245	3P	2	C
YCB6H-63 MCB 3P C 4A 4500A	3C0445	3P	4	C
YCB6H-63 MCB 3P C 6A 4500A	3C0645	3P	6	C
YCB6H-63 MCB 3P C 10A 4500A	3C1045	3P	10	C
YCB6H-63 MCB 3P C 16A 4500A	3C1645	3P	16	C
YCB6H-63 MCB 3P C 20A 4500A	3C2045	3P	20	C
YCB6H-63 MCB 3P C 25A 4500A	3C2545	3P	25	C
YCB6H-63 MCB 3P C 32A 4500A	3C3245	3P	32	C
YCB6H-63 MCB 3P C 40A 4500A	3C4045	3P	40	C
YCB6H-63 MCB 3P C 50A 4500A	3C5045	3P	50	C
YCB6H-63 MCB 3P C 63A 4500A	3C6345	3P	63	C
YCB6H-63 MCB 4P C 2A 4500A	4C0245	4P	2	C
YCB6H-63 MCB 4P C 4A 4500A	4C0445	4P	4	C
YCB6H-63 MCB 4P C 6A 4500A	4C0645	4P	6	C
YCB6H-63 MCB 4P C 10A 4500A	4C1045	4P	10	C
YCB6H-63 MCB 4P C 16A 4500A	4C1645	4P	16	C
YCB6H-63 MCB 4P C 20A 4500A	4C2045	4P	20	C
YCB6H-63 MCB 4P C 25A 4500A	4C2545	4P	25	C
YCB6H-63 MCB 4P C 32A 4500A	4C3245	4P	32	C
YCB6H-63 MCB 4P C 40A 4500A	4C4045	4P	40	C

YCB6H-63 MCB 4P C 50A 4500A	4C5045	4P	50	C
YCB6H-63 MCB 4P C 63A 4500A	4C6345	4P	63	C
Description	Commercial reference	Poles	Rated Current	Curve
YCB6H-63 MCB 1P B 2A 4500A	1B0245	1P	2	B
YCB6H-63 MCB 1P B 4A 4500A	1B0445	1P	4	B
YCB6H-63 MCB 1P B 6A 4500A	1B0645	1P	6	B
YCB6H-63 MCB 1P B 10A 4500A	1B1045	1P	10	B
YCB6H-63 MCB 1P B 16A 4500A	1B1645	1P	16	B
YCB6H-63 MCB 1P B 20A 4500A	1B2045	1P	20	B
YCB6H-63 MCB 1P B 25A 4500A	1B2545	1P	25	B
YCB6H-63 MCB 1P B 32A 4500A	1B3245	1P	32	B
YCB6H-63 MCB 1P B 40A 4500A	1B4045	1P	40	B
YCB6H-63 MCB 1P B 50A 4500A	1B5045	1P	50	B
YCB6H-63 MCB 1P B 63A 4500A	1B6345	1P	63	B
YCB6H-63 MCB 2P B 2A 4500A	2B0245	2P	2	B
YCB6H-63 MCB 2P B 4A 4500A	2B0445	2P	4	B
YCB6H-63 MCB 2P B 6A 4500A	2B0645	2P	6	B
YCB6H-63 MCB 2P B 10A 4500A	2B1045	2P	10	B
YCB6H-63 MCB 2P B 16A 4500A	2B1645	2P	16	B
YCB6H-63 MCB 2P B 20A 4500A	2B2045	2P	20	B
YCB6H-63 MCB 2P B 25A 4500A	2B2545	2P	25	B
YCB6H-63 MCB 2P B 32A 4500A	2B3245	2P	32	B
YCB6H-63 MCB 2P B 40A 4500A	2B4045	2P	40	B
YCB6H-63 MCB 2P B 50A 4500A	2B5045	2P	50	B
YCB6H-63 MCB 2P B 63A 4500A	2B6345	2P	63	B
YCB6H-63 MCB 3P B 2A 4500A	3B0245	3P	2	B
YCB6H-63 MCB 3P B 4A 4500A	3B0445	3P	4	B
YCB6H-63 MCB 3P B 6A 4500A	3B0645	3P	6	B
YCB6H-63 MCB 3P B 10A 4500A	3B1045	3P	10	B
YCB6H-63 MCB 3P B 16A 4500A	3B1645	3P	16	B
YCB6H-63 MCB 3P B 20A 4500A	3B2045	3P	20	B
YCB6H-63 MCB 3P B 25A 4500A	3B2545	3P	25	B
YCB6H-63 MCB 3P B 32A 4500A	3B3245	3P	32	B
YCB6H-63 MCB 3P B 40A 4500A	3B4045	3P	40	B
YCB6H-63 MCB 3P B 50A 4500A	3B5045	3P	50	B
YCB6H-63 MCB 3P B 63A 4500A	3B6345	3P	63	B
YCB6H-63 MCB 4P B 2A 4500A	4B0245	4P	2	B
YCB6H-63 MCB 4P B 4A 4500A	4B0445	4P	4	B
YCB6H-63 MCB 4P B 6A 4500A	4B0645	4P	6	B
YCB6H-63 MCB 4P B 10A 4500A	4B1045	4P	10	B
YCB6H-63 MCB 4P B 16A 4500A	4B1645	4P	16	B
YCB6H-63 MCB 4P B 20A 4500A	4B2045	4P	20	B
YCB6H-63 MCB 4P B 25A 4500A	4B2545	4P	25	B
YCB6H-63 MCB 4P B 32A 4500A	4B3245	4P	32	B

YCB6H-63 MCB 4P B 40A 4500A	4B4045	4P	40	B
YCB6H-63 MCB 4P B 50A 4500A	4B5045	4P	50	B
YCB6H-63 MCB 4P B 63A 4500A	4B6345	4P	63	B

Test item particulars	MCB
Type of circuit-breaker	YCB6H-63 (References list see page 10-12)
Number of poles	<input checked="" type="checkbox"/> 1-P <input type="checkbox"/> 1-P+N <input checked="" type="checkbox"/> 2-P <input checked="" type="checkbox"/> 3-P <input type="checkbox"/> 3-P+N <input checked="" type="checkbox"/> 4-P
Protection against external influences	<input checked="" type="checkbox"/> enclosed <input type="checkbox"/> unenclosed
Method of mounting	<input type="checkbox"/> surface <input type="checkbox"/> flush <input type="checkbox"/> panel board <input checked="" type="checkbox"/> on rail
Method of connection	<input checked="" type="checkbox"/> not associated with the mechanical mounting <input type="checkbox"/> associated with the mechanical mounting
Type of terminal	<input type="checkbox"/> screw ^{a) b)} <input checked="" type="checkbox"/> pillar ^{a) b)} <input type="checkbox"/> cage ^{a) b)} <input type="checkbox"/> lug <input type="checkbox"/> screw less ^{a)} <input type="checkbox"/> flat quick connect ^{a)} <input type="checkbox"/> plug-in <input type="checkbox"/> screw-in a) copper conductors b) aluminium conductors
Instantaneous tripping current	<input checked="" type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D
I ^{2t} characteristic	Class 1 (according to EN 60898-1)
Value of rated operational voltage (Ue).....	<input type="checkbox"/> 120 V <input type="checkbox"/> 230 V <input type="checkbox"/> 240 V <input type="checkbox"/> 120/240 V <input type="checkbox"/> 230/400 V <input type="checkbox"/> 400 V <input checked="" type="checkbox"/> 240/415 V for 1P <input checked="" type="checkbox"/> 415 V for 2P/3P/4P
Value of rated current (In).....	2; 4; 6;10;16;20;25;32;40; 50; 63A
Value of rated frequency	<input checked="" type="checkbox"/> 50 Hz <input checked="" type="checkbox"/> 60 Hz
Ambient air temperature (°C)	<input checked="" type="checkbox"/> 30°C <input type="checkbox"/> 40°C <input type="checkbox"/> Other _____°C
Rated short-circuit capacity (Icn)	<input type="checkbox"/> 1,5 kA <input type="checkbox"/> 3 kA <input checked="" type="checkbox"/> 4,5 kA <input type="checkbox"/> 6 kA <input type="checkbox"/> 10 kA <input type="checkbox"/> 15 kA <input type="checkbox"/> 20 kA <input type="checkbox"/> 25 kA
Rated impulse withstand voltage (Uimp)	<input type="checkbox"/> 2,5 kV <input checked="" type="checkbox"/> 4 kV <input type="checkbox"/> declared ___kV

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	TESTS „A1“ 1 SAMPLE 1P;C63	A₁₋₁	--
6	MARKING AND OTHER INFORMATION		
	Circuit-breaker marked with:		--
	a) Manufacturer's name or trade mark.....:		P
	b) Type designation, catalogue number or other serial number	YCB6H-63	P
	c) Rated voltage (V).....:	240/415V~	P
	d) Rated current without symbol "A", preceded by the symbol of instantaneous tripping.....:	C63	P
	e) Rated frequency (Hz)	50/60Hz	P
	f) Rated short circuit capacity (A).....:	4500 with a rectangle	P
	g) Wiring diagram		P
	h) Ambient air temperature, if different from 30°C		N/A
	i) Degree of protection, if different from IP20		N/A
	j) For D-type circuit-breakers: the maximum instantaneous tripping current, if higher than 20 I _n see table 2)		N/A
	k) Rated impulse withstand voltage U _{imp} if it is 2,5 kV		N/A
	l) Making and breaking capacity on an individual protected pole of multipole circuit-breakers (I _{cn1}), if different from I _{cn}		N/A
	Marking d) shall be readily visible when the CB is installed		P
	If, for small devices, the available space is insufficient, markings a), b), c), e), f), h), j) and l) may be put on the side or on the back of the CB		P
	Marking g) may be on the inside of any cover which has to be removed in order to connect the supply wires but shall not be on a label loosely attached to the CB		P
	Any other information not marked shall be given in the manufacturer's documentation		P
	The suitability for isolation, which is provided by all circuit-breakers of this standard, may be indicated by the symbol on the device		P
	I ² t characteristic (documentation)	1	P
	Symbols on supply and load terminal		N/A
	Terminal for neutral conductor N		N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Earthing terminal if any (IEC 60417-5019)		N/A
	On - off position shall be clearly indicated - 0 I -	I O	P
	For push-button CB the off push-button shall either be red or be marked with the symbol '0'		N/A
	Red not used for other push-button		N/A
	For CB with multiple current ratings, the maximum value is marked, the adjusted value indicated without ambiguity		N/A
	For rail-mounted circuit-breakers, appropriate rail(s) shall be indicated in the manufacturer's documentation		P
	Marking shall be indelible and easily legible (not on removable parts), 15 s with water, 15 s with hexane (see cl. 9.3)		P
8.	REQUIREMENTS FOR CONSTRUCTION AND OPERATION		
8.1.1	General		P
	Circuit-breakers shall be so designed and constructed that, in normal use, their performance is reliable and without danger to the user or surroundings		P
8.1.2	Mechanism		P
	The moving contact shall be mechanically coupled so that all poles make and break together, whether operated manually or automatically, even if an overload occurs on one pole only		N/A
	The switched neutral shall close before and open after the protected pole (s)		N/A
	Neutral pole having adequate making and breaking capacity and CB with independent manual operation: all poles operate together including neutral pole		N/A
	CB shall have a trip free mechanism		P
	It shall be possible to switch the CB on and off by hand		P
	No intermediate position of the contacts		P
	Position of contacts shall be indicated		P
	Indication visible from the outside		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	If the indication is on the actuating means, it shall, when released, automatically take up or stay in the position corresponding to that of the moving contacts; operating means shall have two different rest positions, except that, for automatic operation, a third distinct rest position may be provided		P
	If a separate mechanical indicator is used to indicate the position of the main contacts, colour red shall be used for the on position and green for the off position.		P
	The action of the mechanism shall not be influenced by the position of enclosures		P
	If the cover is used as a guiding means for push-button, it shall not be possible to remove this button from the outside		N/A
	Operating means securely fixed, not possible to remove them without a tool		P
	For the up-down operating means the contacts shall be closed by the up movement.		P
8.1.3	Clearances and creepage distances and operation		P
	The minimum required clearances and creepage distances are based on the CB being designed for operating in an environment with pollution degree 2		P
	Parts of PCBs connected to live parts and protected against pollution by the use of a type 2 protection according to IEC 60664-3 are exempted from this verification		N/A
	The insulating materials are classified into material groups on the basis of their comparative tracking index (CTI) according to IEC 60664-1	175V IIIa	P
	For clearances on printed wiring material, footnote 3 in Table F.2 of IEC 60664-1:2007 applies. For creepage distances on printed wiring material, the distances from Table F.4 of IEC 60664-1:2007 for pollution degree 1 can be applied only if protected with a coating meeting IEC 60664-3 requirements and tests		N/A
8.1.3.1	Clearances		P
	Compliance for item 1 in Table 4 is checked by measurement and by the test of 9.7.5.4. The test is carried out with samples not submitted to the humidity treatment described in 9.7.1		P
	Compliance as regards items 2 and 4 in Table 4 is checked by measurement and, if the clearances are reduced, by the tests of 9.7.5.2		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	The clearances of items 2 and 4 (except accessible surface after installation) may be reduced provided that the measured clearances are not shorter than the minimum allowed in IEC 60664-1 for homogenous field conditions.		N/A
	In this case, compliance as regards items 2 and 4 is always checked by the test of 9.7.5.2		N/A
	Compliance as regards item 3 in Table 4 is checked by measurement		N/A
	Minimum clearances (see table 4)		P
	Clearances [mm] Uimp		--
	4 kV (see table 4) 2,5 kV (see table 4)	<input checked="" type="checkbox"/> <input type="checkbox"/>	--
		minimum clearances [mm]	--
	1.between live parts (of the main circuits) which are separated when the CB is in off position.....:	4,07mm	P
	2.between live parts of different polarity.....:		N/A
	3.between circuits supplied from different sources, one of which being PELV or SELV		N/A
	4.between live parts and		P
	- accessible surfaces of operating means.....:	14,2mm	P
	- screws or other means for fixing covers		N/A
	- surface on which the base is mounted.....:	6,94mm	P
	- screws or other means for fixing the circuit breaker	6,94mm	P
	- metal covers or boxes		N/A
	- other accessible metal parts	14,2mm	P
	- metal frames supporting the base (flush-type)..:		N/A
8.1.3.2	Creepage distances		P
	Compliance as regards items 1, 2, 3 and 4 of Table 4 is checked by measurement		P
	Minimum creepage distances (see table 4)		P
	Material group	<input type="checkbox"/> III _b <input checked="" type="checkbox"/> III _a <input type="checkbox"/> II <input type="checkbox"/> I	--
		minimum creepage distances [mm]	--
	1.between live parts (of the main circuits) which are separated when the CB is in off position.....:	5,31mm	P
	2.between live parts of different polarity.....:		N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	3.between circuits supplied from different sources, one of which being PELV or SELV		N/A
	4.between live parts and		P
	- accessible surfaces of operating means	20,7mm	P
	- screws or other means for fixing covers		N/A
	- surface on which the base is mounted.....	6,94mm	P
	- screws or other means for fixing the circuit breaker	6,94mm	P
	- metal covers or boxes		N/A
	- other accessible metal parts	20,7mm	P
	- metal frames supporting the base (flush-type).....		N/A
8.1.3.3	Solid insulation		P
	Compliance is checked by the tests according to 9.7.2, 9.7.3, 9.7.4 and 9.7.5, as applicable		P
8.1.4	Screws, current-carrying parts and connections		P
8.1.4.1	Connections, withstand mechanical stresses occurring in normal use		P
	Screws for mounting of the CB not of the thread-cutting type		P
	Test according to cl. 9.4:		P
	- 10 times (screw Ø / torque Nm)	Ø__mm__Nm (see table 11) Ø__mm__Nm	N/A
	- 5 times (screw Ø / torque Nm)	Ø4,9mm 2,0Nm (see table 11) Ø__mm__Nm	P
	After test connections have not become loose nor electrical function impaired		P
8.1.4.2	Screws with a thread of insulating material ensured correct introduction		N/A
8.1.4.3	Electrical connection: contact pressure not transmitted through insulating material, unless there is sufficient resilience in the metallic parts		P
8.1.4.4	Current-carrying parts including parts intended for protective conductors, if any, shall be made of a metal having, under the conditions occurring in the equipment, mechanical strength, electrical conductivity and resistance to corrosion adequate for their intended use. Examples below:		P
	- copper		N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	- alloy 58% copper for worked cold parts		P
	- alloy 50% copper for other parts		N/A
	- other metal		N/A
	In case of using ferrous alloys or suitably coated ferrous alloys, compliance to resistance to corrosion is checked by a test of resistance to rusting (see 9.16).		P
	The requirements of this subclause do not apply to contacts, magnetic circuits, heater elements, bimetals, shunts, electronic components, including printed circuit board or to screws, nuts, washers, clamping plates, similar parts of terminals and parts of the test circuit		P
	Compliance is checked by inspection in accordance with the manufacturer's declaration		P
8.1.5	Terminals for external conductors		--
	Compliance is checked by inspection and by the tests as relevant for the type of connection:		--
	by tests of clause 9.5 for screw-type terminals		P
	by specific tests for plug-in or bolt-on CBs included in this document		N/A
	by the tests of Annexes J, K		N/A
8.1.5.1	Terminals ensure the necessary contact pressure		P
9.5	Torque test:		P
	- torque (Nm); diameter (mm).....:	2,0Nm, Ø4,9mm	--
	- torque (Nm); diameter (mm).....:		--
	- torque (Nm); diameter (mm).....:		--
	- max. cross-sectional area (mm ²).....:	25mm ²	--
9.5.2	Pull test:		P
	Terminals shall be suitable for all types of conductors: rigid (solid or stranded) and flexible, unless otherwise specified by the manufacturer.	All types	--
	Min. cross-section solid / stranded / flexible (mm ²).....:	1mm ² /1,5 mm ² /1mm ²	--
	Max. cross-section solid / stranded / flexible (mm ²).....:	6mm ² /25 mm ² /16mm ²	--
	Torque ² / ₃ (Nm)	1,33Nm	--
	Pull for 1 min solid / stranded / flexible (N).....:	Min. cross-section 50/50/50N Max. cross-section 60/100/90N	P


IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	During the test no noticeable move of conductor		P
9.5.3	Torque test:		P
	- torque $^{2/3}$ (Nm).....:	1,33Nm	--
	- min. cross-sectional area (mm ²).....:	1mm ²	--
	- max. cross-sectional area (mm ²).....:	25mm ²	--
	The conductor shows no undue damage nor severed strands		P
	Terminals have not worked loose and no damage		P
9.5.4	Terminals fitted with the largest cross-section area specified in Table 5, for stranded copper conductor.		P
	Max. cross-section stranded (mm ²).....:	25mm ²	--
	Torque $^{2/3}$ (Nm)	1,33Nm	--
	After the test no strand of conductor escaped outside		P
8.1.5.2	Terminals allow the connection of conductors of the following cross-sectional areas: (table 5)		P


IEC 60898-1					
Clause	Requirement + Test		Result - Remark	Verdict	
	Rated current (A) sections	Range of nominal cross to be clamped* (mm ²) Rigid (solid or stranded) conductors	Flexible conductors	1—2,5mm ² /10—25mm ²	P
	≤ 13	1 to 2,5	1 to 2,5		
	> 13 ≤ 16	1 to 4	1 to 4		
	> 16 ≤ 25	1,5 to 6	1,5 to 6		
	> 25 ≤ 32	2,5 to 10	2,5 to 6		
	> 32 ≤ 50	4 to 16	4 to 10		
	> 50 ≤ 80	10 to 25	10 to 16		
	> 80 ≤ 100	16 to 35	16 to 25		
	> 100 ≤ 125	24 to 50	25 to 35		
	*It is required that, for current ratings up to and including 50 A, terminals be designed to clamp solid conductors as well as rigid stranded conductors. Nevertheless, it is permitted that terminals for conductors having cross-sections from 1 mm ² up to 6 mm ² be designed to clamp solid conductors only.				P
	- or terminals for external untreated aluminium conductors and with aluminium screw-type terminals for use with copper or with aluminium conductors according to Annex L.				N/A
8.1.5.3	Means for clamping the conductors in the terminals not serve to fix any other component (See test sub-clause 9.5)				P
8.1.5.4	Terminals for I _N ≤ 32 A allow the connection of conductors without special preparation				P
8.1.5.5	Terminals shall have adequate mechanical strength; ISO thread or equivalent (See tests of sub-clause 9.4 and 9.5.2)				P
8.1.5.6	Clamping of conductor without damage to the conductor (See test of sub-clause 9.5.3)				P
8.1.5.7	Clamping of conductor between metal surfaces (See tests of sub-clause 9.4 and 9.5.2)				P
8.1.5.8	Conductor shall not slip-out when the clamping screw or nuts are tightened (See test of sub-clause 9.5.4)				P
8.1.5.9	Terminals shall be properly fixed. No work loose when the clamping screws or nuts are tightened or loosened (See test of sub-clause 9.4)				P
8.1.5.10	Clamping screws or nuts of terminals for protective conductors adequately secured against accidental loosening				N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.1.5.11	Pillar terminals shall allow full insertion and reliable clamping of the conductor		P
8.1.5.12	Screws and nuts of terminals for external conductors shall be in engagement with a metal thread, and the screws shall not be the thread cutting type		P
8.1.6	Non-interchangeability		N/A
	For circuit-breakers intended to be mounted on bases forming a unit therewith (plug-in or screw-in type) it shall not be possible, without the aid of a tool, to replace a circuit-breaker when mounted as for normal use by another of the same make having a higher rated current, compliance is checked by inspection		N/A
8.1.7	Mechanical mounting of plug-in circuit-breakers		N/A
8.1.7.1	The mechanical mounting of plug-in circuit-breakers, the retention of which does not depend solely on their plug-in connection(s), shall be reliable and have adequate stability		N/A
8.1.7.2	Plug-in type circuit-breakers, the retention of which does not depend solely on their plug-in connection(s) Compliance of the mechanical mounting is checked by the relevant test 9.13		N/A
8.1.7.3	Plug-in type circuit-breakers, the retention of which does depend solely on their plug-in connection(s) Compliance of the mechanical mounting is checked by the relevant test 9.13		N/A
8.14	Electromagnetic Immunity		P
	Circuit-breakers for overcurrent protection for household and similar installations are not sensitive to normal electromagnetic disturbance and therefore no immunity tests are required		P
8.15	Electromagnetic emission		P
	Electromagnetic disturbance can only be generated by circuit-breakers for overcurrent protection for household and similar installations during occasional switching or automatic breaking operations. The duration of the disturbances is of the order of milliseconds		P
	The frequency, the level and the consequences of these emissions are considered as part of the normal electromagnetic environment of low-voltage installations. Therefore the requirements for electromagnetic emissions are deemed to be satisfied and no verifications are necessary		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.2	Protection against electric shock		P
	Live parts not accessible in normal use		P
	For CB, other than plug-in type, external parts, other than screws and other means for fixing covers, which are accessible shall be of insulating material		P
	Unless the live parts are within an internal enclosure of insulating material: Lining - reliable fixed, - adequate thickness and - mechanical strength		N/A
	Inlet openings for cables shall be in insulating material or be provided with bushings or similar devices in insulating material Such device - shall be reliable fixed - shall have adequate mechanical strength		N/A
	For plug-in CB, external parts, other than screws and other means for fixing covers, which are accessible shall be in insulating material		N/A
	Metallic operating means insulated from live parts		N/A
	Metal parts of the mechanism not accessible and insulated from accessible metal parts, metal frames (for flush-type), screws or other means for fixing the base		P
	Replacement of plug-in CB possible without touching live parts		N/A
	Lacquer or enamel not considered		P
8.1.3	Creepage distances [mm] (see table 4)		P
	Internal parts only	See above	P
9.6	Test of protection against electric shock		P
	This verification is applicable to those parts of circuit breakers which are exposed to the operator when mounted as for normal use		P
	Use of test finger so designed that each jointed can be turned through an angle of 90° with respect to the finger		P
	Circuit-breaker with enclosures of thermoplastic material are additional tested at 35 °C for 1 min with a force of 75 N	35 °C; 1min; 75 N	P
8.10	Resistance to heat		P
	CB sufficiently resistant to heat		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
9.14	Test of resistance to heat		P
9.14.1	Test:		P
	- without removable covers 1 h (100 ± 2) °C	100°C	P
	- removable covers 1 h (70 ± 2) °C		N/A
	After the test no access to live parts, marking still legible		P
9.14.2	Ball pressure test for external parts of insulating material (parts retaining current-carrying parts and parts of the protective circuit in position) T = 125°C Ø of impression ≤ 2 mm	125°C Impression: 1,0mm	P
9.14.3	Ball pressure test for external parts of insulating material (parts not retaining current-carrying parts and parts of the protective circuit in position) T = (70 ± 2)°C or T = ___ °C = (40 ± 2)°C + max. temperature rise of sub-clause 9.8 Ø of impression ≤ 2 mm	70°C Impression: 0,8mm	P
8.12	Resistance to rusting		P
	Ferrous parts adequately protected against rusting		P
9.16	Test of resistance to rusting:		P
	- 10 min immersed in a cold chemical degreaser such as methyl-chloroform or refined petrol		P
	- 10 min immersed in a 10% solution of chloride in water at 20°C		P
	- 10 min at 95% humidity at 20°C		P
	- 10 min at 100°C		P
	No sign of rust		P

	TESTS „A₁“ 1 SAMPLE 4P;C63	A₁₋₂	--
6	MARKING AND OTHER INFORMATION		
	Circuit-breaker marked with:		--
	a) Manufacturer's name or trade mark.....:		P
	b) Type designation, catalogue number or other serial number	YCB6H-63	P
	c) Rated voltage (V).....:	415V~	P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	d) Rated current without symbol "A", preceded by the symbol of instantaneous tripping..... :	C63	P
	e) Rated frequency (Hz)	50/60Hz	P
	f) Rated short circuit capacity (A)..... :	4500 with a rectangle	P
	g) Wiring diagram		P
	h) Ambient air temperature, if different from 30°C		N/A
	i) Degree of protection, if different from IP20		N/A
	j) For D-type circuit-breakers: the maximum instantaneous tripping current, if higher than 20 In see table 2)		N/A
	k) Rated impulse withstand voltage Uimp if it is 2,5 kV		N/A
	l) Making and breaking capacity on an individual protected pole of multipole circuit-breakers (Icn1), if different from Icn		N/A
	Marking d) shall be readily visible when the CB is installed		P
	If, for small devices, the available space is insufficient, markings a), b), c), e), f), h), j) and l) may be put on the side or on the back of the CB		P
	Marking g) may be on the inside of any cover which has to be removed in order to connect the supply wires but shall not be on a label loosely attached to the CB		P
	Any other information not marked shall be given in the manufacturer's documentation		P
	The suitability for isolation, which is provided by all circuit-breakers of this standard, may be indicated by the symbol on the device		P
	I ² t characteristic (documentation)	1	P
	Symbols on supply and load terminal		N/A
	Terminal for neutral conductor N		N/A
	Earthing terminal if any (IEC 60417-5019)		N/A
	On - off position shall be clearly indicated - 0 I -	I O	P
	For push-button CB the off push-button shall either be red or be marked with the symbol '0'		N/A
	Red not used for other push-button		N/A
	For CB with multiple current ratings, the maximum value is marked, the adjusted value indicated without ambiguity		N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	For rail-mounted circuit-breakers, appropriate rail(s) shall be indicated in the manufacturer's documentation		P
	Marking shall be indelible and easily legible (not on removable parts), 15 s with water, 15 s with hexane (see cl. 9.3)		P
8.	REQUIREMENTS FOR CONSTRUCTION AND OPERATION		
8.1.1	General		P
	Circuit-breakers shall be so designed and constructed that, in normal use, their performance is reliable and without danger to the user or surroundings		P
8.1.2	Mechanism		P
	The moving contact shall be mechanically coupled so that all poles make and break together, whether operated manually or automatically, even if an overload occurs on one pole only		P
	The switched neutral shall close before and open after the protected pole (s)		N/A
	Neutral pole having adequate making and breaking capacity and CB with independent manual operation: all poles operate together including neutral pole		N/A
	CB shall have a trip free mechanism		P
	It shall be possible to switch the CB on and off by hand		P
	No intermediate position of the contacts		P
	Position of contacts shall be indicated		P
	Indication visible from the outside		P
	If the indication is on the actuating means, it shall, when released, automatically take up or stay in the position corresponding to that of the moving contacts; operating means shall have two different rest positions, except that, for automatic operation, a third distinct rest position may be provided		P
	If a separate mechanical indicator is used to indicate the position of the main contacts, colour red shall be used for the on position and green for the off position.		P
	The action of the mechanism shall not be influenced by the position of enclosures		P
	If the cover is used as a guiding means for push-button, it shall not be possible to remove this button from the outside		N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Operating means securely fixed, not possible to remove them without a tool		P
	For the up-down operating means the contacts shall be closed by the up movement.		P
8.1.3	Clearances and creepage distances and operation		P
	The minimum required clearances and creepage distances are based on the CB being designed for operating in an environment with pollution degree 2		P
	Parts of PCBs connected to live parts and protected against pollution by the use of a type 2 protection according to IEC 60664-3 are exempted from this verification		N/A
	The insulating materials are classified into material groups on the basis of their comparative tracking index (CTI) according to IEC 60664-1	175V IIIa	P
	For clearances on printed wiring material, footnote 3 in Table F.2 of IEC 60664-1:2007 applies. For creepage distances on printed wiring material, the distances from Table F.4 of IEC 60664-1:2007 for pollution degree 1 can be applied only if protected with a coating meeting IEC 60664-3 requirements and tests		N/A
8.1.3.1	Clearances		P
	Compliance for item 1 in Table 4 is checked by measurement and by the test of 9.7.5.4. The test is carried out with samples not submitted to the humidity treatment described in 9.7.1		P
	Compliance as regards items 2 and 4 in Table 4 is checked by measurement and, if the clearances are reduced, by the tests of 9.7.5.2		P
	The clearances of items 2 and 4 (except accessible surface after installation) may be reduced provided that the measured clearances are not shorter than the minimum allowed in IEC 60664-1 for homogenous field conditions.		N/A
	In this case, compliance as regards items 2 and 4 is always checked by the test of 9.7.5.2		N/A
	Compliance as regards item 3 in Table 4 is checked by measurement		N/A
	Minimum clearances (see table 4)		P
	Clearances [mm] Uimp		--
	4 kV (see table 4) 2,5 kV (see table 4)	<input checked="" type="checkbox"/> <input type="checkbox"/>	--

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
		minimum clearances [mm]	--
	1.between live parts (of the main circuits) which are separated when the CB is in off position.....:	4,07mm	P
	2.between live parts of different polarity.....:	11,2mm	P
	3.between circuits supplied from different sources, one of which being PELV or SELV.....:		N/A
	4.between live parts and		P
	- accessible surfaces of operating means.....:	14,2mm	P
	- screws or other means for fixing covers.....:		N/A
	- surface on which the base is mounted.....:	6,94mm	P
	- screws or other means for fixing the circuit breaker.....:	6,94mm	P
	- metal covers or boxes.....:		N/A
	- other accessible metal parts.....:	14,2mm	P
	- metal frames supporting the base (flush-type)..:		N/A
8.1.3.2	Creepage distances		P
	Compliance as regards items 1, 2, 3 and 4 of Table 4 is checked by measurement		P
	Minimum creepage distances (see table 4)		P
	Material group	<input type="checkbox"/> III _b <input checked="" type="checkbox"/> III _a <input type="checkbox"/> II <input type="checkbox"/> I	--
		minimum creepage distances [mm]	--
	1.between live parts (of the main circuits) which are separated when the CB is in off position.....:	5,31mm	P
	2.between live parts of different polarity.....:	11,2mm	P
	3.between circuits supplied from different sources, one of which being PELV or SELV.....:		N/A
	4.between live parts and		P
	- accessible surfaces of operating means.....:	20,7mm	P
	- screws or other means for fixing covers.....:		N/A
	- surface on which the base is mounted.....:	6,94mm	P
	- screws or other means for fixing the circuit breaker.....:	6,94mm	P
	- metal covers or boxes.....:		N/A
	- other accessible metal parts.....:	20,7mm	P
	- metal frames supporting the base (flush-type)..:		N/A
8.1.3.3	Solid insulation		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Compliance is checked by the tests according to 9.7.2, 9.7.3, 9.7.4 and 9.7.5, as applicable		P
8.1.4	Screws, current-carrying parts and connections		P
8.1.4.1	Connections, withstand mechanical stresses occurring in normal use		P
	Screws for mounting of the CB not of the thread-cutting type		P
	Test according to cl. 9.4:		P
	- 10 times (screw Ø / torque Nm)	Ø __ mm __ Nm (see table 11) Ø __ mm __ Nm	N/A
	- 5 times (screw Ø / torque Nm)	Ø4,9mm 2,0Nm (see table 11) Ø __ mm __ Nm	P
	After test connections have not become loose nor electrical function impaired		P
8.1.4.2	Screws with a thread of insulating material ensured correct introduction		N/A
8.1.4.3	Electrical connection: contact pressure not transmitted through insulating material, unless there is sufficient resilience in the metallic parts		P
8.1.4.4	Current-carrying parts including parts intended for protective conductors, if any, shall be made of a metal having, under the conditions occurring in the equipment, mechanical strength, electrical conductivity and resistance to corrosion adequate for their intended use. Examples below:		P
	- copper		N/A
	- alloy 58% copper for worked cold parts		P
	- alloy 50% copper for other parts		N/A
	- other metal		N/A
	In case of using ferrous alloys or suitably coated ferrous alloys, compliance to resistance to corrosion is checked by a test of resistance to rusting (see 9.16).		P
	The requirements of this subclause do not apply to contacts, magnetic circuits, heater elements, bimetals, shunts, electronic components, including printed circuit board or to screws, nuts, washers, clamping plates, similar parts of terminals and parts of the test circuit		P
	Compliance is checked by inspection in accordance with the manufacturer's declaration		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.1.5	Terminals for external conductors		--
	Compliance is checked by inspection and by the tests as relevant for the type of connection:		--
	by tests of clause 9.5 for screw-type terminals		P
	by specific tests for plug-in or bolt-on CBs included in this document		N/A
	by the tests of Annexes J, K		N/A
8.1.5.1	Terminals ensure the necessary contact pressure		P
9.5	Torque test:		P
	- torque (Nm); diameter (mm).....:	2,0Nm, Ø4,9mm	--
	- torque (Nm); diameter (mm).....:		--
	- torque (Nm); diameter (mm).....:		--
	- max. cross-sectional area (mm ²).....:	25mm ²	--
9.5.2	Pull test:		P
	Terminals shall be suitable for all types of conductors: rigid (solid or stranded) and flexible, unless otherwise specified by the manufacturer.	All types	--
	Min. cross-section solid / stranded / flexible (mm ²).....:	1mm ² /1,5 mm ² /1mm ²	--
	Max. cross-section solid / stranded / flexible (mm ²).....:	6mm ² /25 mm ² /16mm ²	--
	Torque ² / ₃ (Nm)	1,33Nm	--
	Pull for 1 min solid / stranded / flexible (N).....:	Min. cross-section 50/50/50N Max. cross-section 60/100/90N	P
	During the test no noticeable move of conductor		P
9.5.3	Torque test:		P
	- torque ² / ₃ (Nm).....:	1,33Nm	--
	- min. cross-sectional area (mm ²).....:	1mm ²	--
	- max. cross-sectional area (mm ²).....:	25mm ²	--
	The conductor shows no undue damage nor severed strands		P
	Terminals have not worked loose and no damage		P
9.5.4	Terminals fitted with the largest cross-section area specified in Table 5, for stranded copper conductor.		P
	Max. cross-section stranded (mm ²).....:	25mm ²	--
	Torque ² / ₃ (Nm)	1,33Nm	--

IEC 60898-1																																																		
Clause	Requirement + Test	Result - Remark	Verdict																																															
	After the test no strand of conductor escaped outside		P																																															
8.1.5.2	Terminals allow the connection of conductors of the following cross-sectional areas: (table 5)		P																																															
	<table border="0"> <tr> <td rowspan="2">Rated current (A) sections</td> <td colspan="2">Range of nominal cross to be clamped* (mm²)</td> <td rowspan="2">1—2,5mm²/10—25mm²</td> <td rowspan="2">P</td> </tr> <tr> <td>Rigid (solid or stranded) conductors</td> <td>Flexible conductors</td> </tr> <tr> <td>≤ 13</td> <td>1 to 2,5</td> <td>1 to 2,5</td> <td></td> <td></td> </tr> <tr> <td>> 13 ≤ 16</td> <td>1 to 4</td> <td>1 to 4</td> <td></td> <td></td> </tr> <tr> <td>> 16 ≤ 25</td> <td>1,5 to 6</td> <td>1,5 to 6</td> <td></td> <td></td> </tr> <tr> <td>> 25 ≤ 32</td> <td>2,5 to 10</td> <td>2,5 to 6</td> <td></td> <td></td> </tr> <tr> <td>> 32 ≤ 50</td> <td>4 to 16</td> <td>4 to 10</td> <td></td> <td></td> </tr> <tr> <td>> 50 ≤ 80</td> <td>10 to 25</td> <td>10 to 16</td> <td></td> <td></td> </tr> <tr> <td>> 80 ≤ 100</td> <td>16 to 35</td> <td>16 to 25</td> <td></td> <td></td> </tr> <tr> <td>> 100 ≤ 125</td> <td>24 to 50</td> <td>25 to 35</td> <td></td> <td></td> </tr> </table>	Rated current (A) sections	Range of nominal cross to be clamped* (mm ²)		1—2,5mm ² /10—25mm ²	P	Rigid (solid or stranded) conductors	Flexible conductors	≤ 13	1 to 2,5	1 to 2,5			> 13 ≤ 16	1 to 4	1 to 4			> 16 ≤ 25	1,5 to 6	1,5 to 6			> 25 ≤ 32	2,5 to 10	2,5 to 6			> 32 ≤ 50	4 to 16	4 to 10			> 50 ≤ 80	10 to 25	10 to 16			> 80 ≤ 100	16 to 35	16 to 25			> 100 ≤ 125	24 to 50	25 to 35				
Rated current (A) sections	Range of nominal cross to be clamped* (mm ²)		1—2,5mm ² /10—25mm ²	P																																														
	Rigid (solid or stranded) conductors	Flexible conductors																																																
≤ 13	1 to 2,5	1 to 2,5																																																
> 13 ≤ 16	1 to 4	1 to 4																																																
> 16 ≤ 25	1,5 to 6	1,5 to 6																																																
> 25 ≤ 32	2,5 to 10	2,5 to 6																																																
> 32 ≤ 50	4 to 16	4 to 10																																																
> 50 ≤ 80	10 to 25	10 to 16																																																
> 80 ≤ 100	16 to 35	16 to 25																																																
> 100 ≤ 125	24 to 50	25 to 35																																																
	*It is required that, for current ratings up to and including 50 A, terminals be designed to clamp solid conductors as well as rigid stranded conductors. Nevertheless, it is permitted that terminals for conductors having cross-sections from 1 mm ² up to 6 mm ² be designed to clamp solid conductors only.		P																																															
	- or terminals for external untreated aluminium conductors and with aluminium screw-type terminals for use with copper or with aluminium conductors according to Annex L.		N/A																																															
8.1.5.3	Means for clamping the conductors in the terminals not serve to fix any other component (See test sub-clause 9.5)		P																																															
8.1.5.4	Terminals for $I_N \leq 32$ A allow the connection of conductors without special preparation		P																																															
8.1.5.5	Terminals shall have adequate mechanical strength; ISO thread or equivalent (See tests of sub-clause 9.4 and 9.5.2)		P																																															
8.1.5.6	Clamping of conductor without damage to the conductor (See test of sub-clause 9.5.3)		P																																															
8.1.5.7	Clamping of conductor between metal surfaces (See tests of sub-clause 9.4 and 9.5.2)		P																																															
8.1.5.8	Conductor shall not slip-out when the clamping screw or nuts are tightened (See test of sub-clause 9.5.4)		P																																															

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
8.1.5.9	Terminals shall be properly fixed. No work loose when the clamping screws or nuts are tightened or loosened (See test of sub-clause 9.4)		P
8.1.5.10	Clamping screws or nuts of terminals for protective conductors adequately secured against accidental loosening		N/A
8.1.5.11	Pillar terminals shall allow full insertion and reliable clamping of the conductor		P
8.1.5.12	Screws and nuts of terminals for external conductors shall be in engagement with a metal thread, and the screws shall not be the thread cutting type		P
8.1.6	Non-interchangeability		N/A
	For circuit-breakers intended to be mounted on bases forming a unit therewith (plug-in or screw-in type) it shall not be possible, without the aid of a tool, to replace a circuit-breaker when mounted as for normal use by another of the same make having a higher rated current, compliance is checked by inspection		N/A
8.1.7	Mechanical mounting of plug-in circuit-breakers		N/A
8.1.7.1	The mechanical mounting of plug-in circuit-breakers, the retention of which does not depend solely on their plug-in connection(s), shall be reliable and have adequate stability		N/A
8.1.7.2	Plug-in type circuit-breakers, the retention of which does not depend solely on their plug-in connection(s) Compliance of the mechanical mounting is checked by the relevant test 9.13		N/A
8.1.7.3	Plug-in type circuit-breakers, the retention of which does depend solely on their plug-in connection(s) Compliance of the mechanical mounting is checked by the relevant test 9.13		N/A
8.14	Electromagnetic Immunity		P
	Circuit-breakers for overcurrent protection for household and similar installations are not sensitive to normal electromagnetic disturbance and the therefore no immunity tests are required		P
8.15	Electromagnetic emission		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Electromagnetic disturbance can only be generated by circuit-breakers for overcurrent protection for household and simliar installations during occasional switching or auomatic breaking operations. The duration of the distrubances is of the order of millisections		P
	The frequency, the level and the consequences of the these emissions are considered as part of the normal eletromagnetic enviroment of low-voltage installations. Therefore the requirements for electromagnetic emssions are deemed to be satisfied and no verifications is necessary		P
8.2	Protection against electric shock		P
	Live parts not accessible in normal use		P
	For CB, other than plug-in type, external parts, other than screws and other means for fixing covers, which are accessible shall be of insulating material		P
	Unless the live parts are within an internal enclosure of insulating material: Lining - reliable fixed, - adequate thickness and - mechanical strength		N/A
	Inlet openings for cables shall be in insulating material or be provided with bushings or similar devices in insulating material Such device - shall be reliable fixed - shall have adequate mechanical strength		N/A
	For plug-in CB, external parts, other than screws and other means for fixing covers, which are accessible shall be in insulating material		N/A
	Metallic operating means insulated from live parts		N/A
	Metal parts of the mechanism not accessible and insulated from accessible metal parts, metal frames (for flush-type), screws or other means for fixing the base		P
	Replacement of plug-in CB possible without touching live parts		N/A
	Lacquer or enamel not considered		P
8.1.3	Creepage distances [mm] (see table 4)		P
	Internal parts only	See above	P
9.6	Test of protection against electric shock		P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	This verification is applicable to those parts of circuit breakers which are exposed to the operator when mounted as for normal use		P
	Use of test finger so designed that each jointed can be turned through an angle of 90° with respect to the finger		P
	Circuit-breaker with enclosures of thermoplastic material are additional tested at 35 °C for 1 min with a force of 75 N	35 °C; 1min; 75 N	P
8.10	Resistance to heat		P
	CB sufficiently resistant to heat		P
9.14	Test of resistance to heat		P
9.14.1	Test:		P
	- without removable covers 1 h (100 ± 2) °C	100°C	P
	- removable covers 1 h (70 ± 2) °C		N/A
	After the test no access to live parts, marking still legible		P
9.14.2	Ball pressure test for external parts of insulating material (parts retaining current-carrying parts and parts of the protective circuit in position) T = 125°C Ø of impression ≤ 2 mm	125°C Impression: 1,0mm	P
9.14.3	Ball pressure test for external parts of insulating material (parts not retaining current-carrying parts and parts of the protective circuit in position) T = (70 ± 2)°C or T = ___ °C = (40 ± 2)°C + max. temperature rise of sub-clause 9.8 Ø of impression ≤ 2 mm	70°C Impression: 0,8mm	P
8.12	Resistance to rusting		P
	Ferrous parts adequately protected against rusting		P
9.16	Test of resistance to rusting:		P
	- 10 min immersed in a cold chemical degreaser such as methyl-chloroform or refined petrol		P
	- 10 min immersed in a 10% solution of chloride in water at 20°C		P
	- 10 min at 95% humidity at 20°C		P
	- 10 min at 100°C		P
	No sign of rust		P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „A2“ 3 samples 1P;C63;Icn=4500A	A2-1	A2-2	A2-3	--
8.11	Resistance to abnormal heat and to fire				P
	External parts of insulating material shall not ignite or spread fire under fault or overload conditions				P
9.15	Resistance to abnormal heat and to fire				P
	Test performed on a complete CB				P
	If it is not possible to perform the test on the complete end product, it is acceptable, according to IEC 60695-2-11:2014, 4.3, to remove the part under its entirety and test tis separately				P
	external parts retaining current-carrying parts and parts of the protective circuit in position (960 ± 15)°C	960°C	960°C	960°C	P
	all other external parts (650 ± 10)°C	650°C	650°C	650°C	P
	No visible flames, no sustained glowing, or	Test all other external parts			P
	flames and glowing extinguish within 30 s after removal	1s	1s	1s	P
	No ignition of tissue paper or scorching of the pinewood board				P

	TESTS „A2“ 3 samples 2P;C63;Icn=4500A	A2-4	A2-5	A2-6	--
8.11	Resistance to abnormal heat and to fire				P
	External parts of insulating material shall not ignite or spread fire under fault or overload conditions				P
9.15	Resistance to abnormal heat and to fire				P
	Test performed on a complete CB				P
	If it is not possible to perform the test on the complete end product, it is acceptable, according to IEC 60695-2-11:2014, 4.3, to remove the part under its entirety and test tis separately				P
	external parts retaining current-carrying parts and parts of the protective circuit in position (960 ± 15)°C	960°C	960°C	960°C	P
	all other external parts (650 ± 10)°C	650°C	650°C	650°C	P
	No visible flames, no sustained glowing, or	Test all other external parts			P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	flames and glowing extinguish within 30 s after removal	1s	1s	1s	P
	No ignition of tissue paper or scorching of the pinewood board				P

	TESTS „A ₂ “ 3 samples 4P;C63;Icn=4500A	A ₂₋₇	A ₂₋₈	A ₂₋₉	--
8.11	Resistance to abnormal heat and to fire				P
	External parts of insulating material shall not ignite or spread fire under fault or overload conditions				P
9.15	Resistance to abnormal heat and to fire				P
	Test performed on a complete CB				P
	If it is not possible to perform the test on the complete end product, it is acceptable, according to IEC 60695-2-11:2014, 4.3, to remove the part under its entirety and test tis separately				P
	external parts retaining current-carrying parts and parts of the protective circuit in position (960 ± 15)°C	960°C	960°C	960°C	P
	all other external parts (650 ± 10)°C	650°C	650°C	650°C	P
	No visible flames, no sustained glowing, or	For all other external parts			P
	flames and glowing extinguish within 30 s after removal	1s	1s	1s	P
	No ignition of tissue paper or scorching of the pinewood board				P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	TESTS „B“ 3 samples 1P;C63;Icn=4500A	B-1 B-2 B-3	--
8.3	Dielectric properties and isolating capability		P
8.3.1	CB shall have adequate dielectric properties and shall ensure isolation:		P
8.3.2	Dielectric strength at power frequency		P
	Compliance is checked by the tests 9.7.1, 9.7.2 and 9.7.3 on circuit-breaker in new condition		P
8.3.3	Isolating capability		P
	Circuit-breakers shall be suitable for isolation. Compliance is checked by the verification of compliance with the minimum clearances and creepage distances of item 1 of table 4 and by tests of 9.7.5.1 and 9.7.5.3.		P
8.3.4	Dielectric strength at rated impulse withstand voltage (Uimp)		P
	Circuit-breakers shall adequately withstand impulse voltages. Compliance is checked by the tests of 9.7.5.2.		P
9.7	Test of dielectric properties		P
9.7.5.4	Verification of resistance of the insulation of open contact and basic insulation against an impulse voltage (suitability for isolation)		P
	These tests are not preceded by the humidity treatment described in 9.7.1.		P
	The test is carried out on an CB fixed on a metal support		P
	The impulses are given by a generator producing positive and negative impulses having a front time of 1,2µs, and a time to half-value of 50µs		P
	The shape of the impulses is adjusted with the CB under test connected to the impulse generator.		P
	rated impulse withstand voltage [kV]:	4kV	--
	sea level of test laboratory [m]:	Sea level	--
	test voltage (acc. Table 15) [kV]:	6,2kV	--
	CB in open position (contacts in open position)		P
	The impulses are applied between:		--
	the line terminals connected together and the load terminals connected together		P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Five positive impulses and five negative impulses are applied, the interval between consecutive impulses being at least 1 s for impulses of the same polarity and being at least 10 s for impulses of the opposite polarity.				P
	No disruptive discharges during the test				P
9.7.1	Resistance to humidity				P
9.7.1.1	Preparation of the circuit-breaker for test				P
	Inlet openings, if any, are left open; if knock-outs are provided, one of them is opened.				P
9.7.1.2	Test conditions				P
	The humidity treatment is carried out in humidity cabinet 91% to 95% and the temperature of the air between 20 °C and 30 °C	Rf = 93 % T = 25°C			P
	Before being placed in the humidity cabinet, the sample is brought to a temperature between T °C and T °C +4 °C	27°C			P
9.7.1.3	Test procedure.				P
	The sample is kept in the cabinet for 48 h.				P
	In order to achieve the specified conditions within the cabinet, it is necessary to ensure constant circulation of the air within and , in general, to use a cabinet which is thermally insulated				P
9.7.1.4	Conditions of the circuit breaker after the tests.				P
	The sample show no damage within the meaning of this standard and shall withstand the tests of 9.7.2 and 9.7.3, 9.7.4 and 9.7.5.2				P
9.7.2	Insulation resistance of the main circuit				P
	After an interval between 30 min and 60 min flowing this treatment, the insulation resistance is measured 5 s after application of a d.c. voltage of approximately 500 V (0, +100 V), consecutively as follows:	[MΩ]	[MΩ]	[MΩ]	P
	a) In open position, between the terminals which are electrically connected together when the circuit-breaker is in the closed position, in turn on each pole $\geq 2 \text{ M}\Omega$	> 2 MΩ	> 2 MΩ	> 2 MΩ	P
	b) in closed position, between each pole in turn and the others connected together, electronic components connected between current paths being disconnected $\geq 2 \text{ M}\Omega$	--	--	--	N/A
	c) in closed position, between all poles connected together and the frame $\geq 5 \text{ M}\Omega$	> 5 MΩ	> 5 MΩ	> 5 MΩ	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	d) for circuit-breakers with metal enclosure having an internal lining of insulating material, between the frame and a metal foil in contact with the inner surface of the lining of the insulating material including bushings and similar devices $\geq 5 \text{ M}\Omega$	--	--	--	N/A
9.7.3	Dielectric strength of the main circuit				P
	After the circuit-breakers have passed the tests of 9.7.2 the test voltage specified is applied for 1 min between the parts indicated in 9.7.2				P
	with electronic components, if any, being disconnected for the test				N/A
	a) 2000 V	2000V			P
	b) 2000 V				N/A
	c) 2000 V	2000V			P
	d) 2500 V				N/A
	No flashover or breakdown				P
9.7.4	Insulation resistance and dielectric strength of the auxiliary circuits				N/A
	Insulation resistance of auxiliary circuits measured with 500^{+100} V DC after 1 min:				--
	Where electronic components connected to the main circuit in normal service are used, the temporary connections for test shall be made so that no voltage between the incoming and outgoing sides of the components				N/A
	1) between all auxiliary circuits and the frame ($\text{M}\Omega$) $\geq 2 \text{ M}\Omega$				N/A
	2) between each part of the auxiliary circuits which might be isolated from the other parts and the whole of the other parts connected together ($\text{M}\Omega$) $\geq 2 \text{ M}\Omega$				N/A
	Dielectric strength of auxiliary circuits measured with an AC voltage at rated frequency for 1 min:				--
	Rated voltage of auxiliary circuits (a.c. or d.c.)	Test voltage (V)	V		--
	≤ 30	600			
	$> 30 \leq 50$	1000			
	$> 50 \leq 110$	1500			
	$> 110 \leq 250$	2000			
	$> 250 \leq 500$	2500			
	1) between all auxiliary circuits and the frame				N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	2) between each part of the auxiliary circuits which might be isolated from the other parts and the whole of the other parts connected together		N/A
	No flashover or perforation		N/A
9.7.5.1	General testing procedure for the impulse withstand voltage tests		P
	The impulses are given by a generator producing positive and negative impulses having a front time of 1,2 μ s, and a time to half-value of 50 μ s		P
	Five positive impulses and five negative impulses are applied, the interval between consecutive impulses being at least 1 s for impulses of the same polarity and being at least 10 s for impulses of the opposite polarity.		P
	The surge impedance of the test apparatus 500 Ω and surge protective devices disconnected before testing or		P
	When carrying out tests on a circuit-breaker incorporating components across the parts under test (e.g. surge protective components), an impulse generator with a virtual impedance of 2 Ω shall be used		N/A
	The shape of the impulses is adjusted with the circuit-breaker under test connected to the impulse generator. For this purpose, appropriate voltage dividers and voltage sensors shall be used		P
	For a circuit-breaker incorporating components across the parts under test (e.g. surge protective components), the shape of the impulses is adjusted without connection of the CB to the impulse generator		N/A
9.7.5.2	Verification of clearances with the impulse withstand voltage		N/A
	If the measurement of clearances of items 2 and 4 in Table 4 shows a reduction of the required length, this test applies.		N/A
	The test is carried out on an CB fixed on a metal support and being in the closed position		N/A
	rated impulse withstand voltage [kV]:	kV	--
	see level of test laboratory [m]:	m	--
	test voltage (acc. Table 14) [kV]:	kV	--

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) in turn between each pole and the other poles connected together, electronic components connected between current paths being disconnected				N/A
	b) between all poles connected together and the frame including a metal foil or part in contact with the outer surface of the housing of insulating material but with the terminal areas kept completely free to avoid flashover between terminals and the metal foil				N/A
	c) for circuit-breakers with a metal enclosure having an internal lining of insulating material, between the frame and a metal foil in contact with the inner surface of the lining of insulating material, including bushings and similar devices				--
	No disruptive discharges during the test				N/A
	If, however, only one such disruptive discharge occurs, ten additional impulses having the same polarity as that which caused the disruptive discharge are applied, the connections being the same as those with which the failure occurred				N/A
	No further disruptive discharge shall occur				N/A
8.4	Temperature rise				P
	Temperature rise does not exceed the limiting values stated in table 6:	sect. 16mm ²			P
9.8.2	Test current: I _N = (reach the steady-state value) Four-pole CB's: <input type="checkbox"/> 1) Three poles loaded 2) One pole and neutral pole loaded <input type="checkbox"/> 1) Four-poles loaded	I _N = 63A			P
	Ambient air temperature	T _{amb} = 22,7°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	L1	≤39	≤43	≤41	P
	L2	-	-	-	
	L3	-	-	-	
	L4(N)	-	-	-	
	Terminals for external connections 60 K				P
	External parts liable to be touched during manual operation of the circuit-breaker, including operating means of insulating material and metallic means for coupling of insulating operating means of several poles 40 K	≤5	≤6	≤6	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	External metallic parts of operating means .. 25 K	-	-	-	N/A
	Other external parts, including that face of the circuit-breaker is in direct contact with the mounting surface 60 K	≤30	≤24	≤24	P
9.8.5	Measurement of power losses	B-1	B-2	B-3	P
	Power loss do not exceed the values stated in table 8	13W			P
	Test current: $I_N = 63A$ (reach the steady state value)				P
	Loaded one pole after the other				P
	Max. power loss : 4,9W	W	W	W	P
	L1	≤4,6	≤4,9	≤4,7	P
	L2	-	-	-	
	L3	-	-	-	
	L4(N)	-	-	-	
8.5	Uninterrupted duty				P
	Circuit-breakers operate reliable even after long service				P
9.9	28 day test				P
	28 cycles - 21 h with current - 3 h without current Cross-sectional area. 16mm ²				P
	During the first period of current flow the temperature of the terminals shall be measured				P
	Ambient air temperature	Tamb= 23,0°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	Terminals for external connections	≤42	≤46	≤44	P
	During the last period of current flow the temperature of the terminals shall be measured				P
	Ambient air temperature	Tamb= 23,0°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	Terminals for external connections	≤43	≤47	≤45	P
	The temperature rise does not exceed the value measured during the first period by more than 15 K				P
	Test current 1,45 $I_N = 91,4A$				P
	- Tripping within	[s]	[s]	[s]	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	- 1h (≤ 63 A)	220	225	180	P
	- 2h (> 63 A)	-	-	-	P

	TESTS „B“ 3 samples 4P;C63;Icn=4500A	B-4	B-5	B-6	--
8.3	Dielectric properties and isolating capability				P
8.3.1	CB shall have adequate dielectric properties and shall ensure isolation:				P
8.3.2	Dielectric strength at power frequency				P
	Compliance is checked by the tests 9.7.1, 9.7.2 and 9.7.3 on circuit-breaker in new condition				P
8.3.3	Isolating capability				P
	Circuit-breakers shall be suitable for isolation. Compliance is checked by the verification of compliance with the minimum clearances and creepage distances of item 1 of table 4 and by tests of 9.7.5.1 and 9.7.5.3.				P
8.3.4	Dielectric strength at rated impulse withstand voltage (Uimp)				P
	Circuit-breakers shall adequately withstand impulse voltages. Compliance is checked by the tests of 9.7.5.2.				P
9.7	Test of dielectric properties				P
9.7.5.4	Verification of resistance of the insulation of open contact and basic insulation against an impulse voltage (suitability for isolation)				P
	These tests are not preceded by the humidity treatment described in 9.7.1.				P
	The test is carried out on an CB fixed on a metal support				P
	The impulses are given by a generator producing positive and negative impulses having a front time of 1,2 μ s, and a time to half-value of 50 μ s				P
	The shape of the impulses is adjusted with the CB under test connected to the impulse generator.				P
	rated impulse withstand voltage [kV]:	4kV			--
	sea level of test laboratory [m]:	Sea level			--
	test voltage (acc. Table 15) [kV]:	6,2kV			--
	CB in open position (contacts in open position)				P
	The impulses are applied between:				--

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	the line terminals connected together and the load terminals connected together				P
	Five positive impulses and five negative impulses are applied, the interval between consecutive impulses being at least 1 s for impulses of the same polarity and being at least 10 s for impulses of the opposite polarity.				P
	No disruptive discharges during the test				P
9.7.1	Resistance to humidity				P
9.7.1.1	Preparation of the circuit-breaker for test				P
	Inlet openings, if any, are left open; if knock-outs are provided, one of them is opened.				P
9.7.1.2	Test conditions				P
	The humidity treatment is carried out in humidity cabinet 91% to 95% and the temperature of the air between 20 °C and 30 °C	Rf = 93 % T = 25°C			P
	Before being placed in the humidity cabinet, the sample is brought to a temperature between T °C and T °C +4 °C	27°C			P
9.7.1.3	Test procedure.				P
	The sample is kept in the cabinet for 48 h.				P
	In order to achieve the specified conditions within the cabinet, it is necessary to ensure constant circulation of the air within and , in general, to use a cabinet which is thermally insulated				P
9.7.1.4	Conditions of the circuit breaker after the tests.				P
	The sample show no damage within the meaning of this standard and shall withstand the tests of 9.7.2 and 9.7.3, 9.7.4 and 9.7.5.2				P
9.7.2	Insulation resistance of the main circuit				P
	After an interval between 30 min and 60 min flowing this treatment, the insulation resistance is measured 5 s after application of a d.c. voltage of approximately 500 V (0, +100 V), consecutively as follows:	[MΩ]	[MΩ]	[MΩ]	P
	a) In open position, between the terminals which are electrically connected together when the circuit-breaker is in the closed position, in turn on each pole $\geq 2 \text{ M}\Omega$	> 2 MΩ	> 2 MΩ	> 2 MΩ	P
	b) in closed position, between each pole in turn and the others connected together, electronic components connected between current paths being disconnected $\geq 2 \text{ M}\Omega$	> 2 MΩ	> 2 MΩ	> 2 MΩ	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	c) in closed position, between all poles connected together and the frame $\geq 5 \text{ M}\Omega$	> 5 M Ω	> 5 M Ω	> 5 M Ω	P
	d) for circuit-breakers with metal enclosure having an internal lining of insulating material, between the frame and a metal foil in contact with the inner surface of the lining of the insulating material including bushings and similar devices $\geq 5 \text{ M}\Omega$	--	--	--	N/A
9.7.3	Dielectric strength of the main circuit				P
	After the circuit-breakers have passed the tests of 9.7.2 the test voltage specified is applied for 1 min between the parts indicated in 9.7.2				P
	with electronic components, if any, being disconnected for the test				N/A
	a) 2000 V	2000V			P
	b) 2000 V	2000V			P
	c) 2000 V	2000V			P
	d) 2500 V				N/A
	No flashover or breakdown				P
9.7.4	Insulation resistance and dielectric strength of the auxiliary circuits				N/A
	Insulation resistance of auxiliary circuits measured with 500 ⁺¹⁰⁰ V DC after 1 min:				--
	Where electronic components connected to the main circuit in normal service are used, the temporary connections for test shall be made so that no voltage between the incoming and outgoing sides of the components				N/A
	1) between all auxiliary circuits and the frame (M Ω) $\geq 2 \text{ M}\Omega$				N/A
	2) between each part of the auxiliary circuits which might be isolated from the other parts and the whole of the other parts connected together (M Ω) $\geq 2 \text{ M}\Omega$				N/A
	Dielectric strength of auxiliary circuits measured with an AC voltage at rated frequency for 1 min:				--

IEC 60898-1				
Clause	Requirement + Test	Result - Remark	Verdict	
	Rated voltage of auxiliary circuits (a.c. or d.c.)	Test voltage (V)	V	--
	≤ 30	600		
	> 30 ≤ 50	1000		
	> 50 ≤ 110	1500		
	> 110 ≤ 250	2000		
	> 250 ≤ 500	2500		
	1) between all auxiliary circuits and the frame			N/A
	2) between each part of the auxiliary circuits which might be isolated from the other parts and the whole of the other parts connected together			N/A
	No flashover or perforation			N/A
9.7.5.1	General testing procedure for the impulse withstand voltage tests			P
	The impulses are given by a generator producing positive and negative impulses having a front time of 1,2μs, and a time to half-value of 50μs			P
	Five positive impulses and five negative impulses are applied, the interval between consecutive impulses being at least 1 s for impulses of the same polarity and being at least 10 s for impulses of the opposite polarity.			P
	The surge impedance of the test apparatus 500Ω and surge protective devices disconnected before testing or			P
	When carrying out tests on a circuit-breaker incorporating components across the parts under test (e.g. surge protective components), an impulse generator with a virtual impedance of 2Ω shall be used			N/A
	The shape of the impulses is adjusted with the circuit-breaker under test connected to the impulse generator. For this purpose, appropriate voltage dividers and voltage sensors shall be used			P
	For a circuit-breaker incorporating components across the parts under test (e.g. surge protective components), the shape of the impulses is adjusted without connection of the CB to the impulse generator			N/A
9.7.5.2	Verification of clearances with the impulse withstand voltage			N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	If the measurement of clearances of items 2 and 4 in Table 4 shows a reduction of the required length, this test applies.				N/A
	The test is carried out on an CB fixed on a metal support and being in the closed position				N/A
	rated impulse withstand voltage [kV]:	kV			--
	see level of test laboratory [m]:	m			--
	test voltage (acc. Table 14) [kV]:	kV			--
	a) in turn between each pole and the other poles connected together, electronic components connected between current paths being disconnected				N/A
	b) between all poles connected together and the frame including a metal foil or part in contact with the outer surface of the housing of insulating material but with the terminal areas kept completely free to avoid flashover between terminals and the metal foil				N/A
	c) for circuit-breakers with a metal enclosure having an internal lining of insulating material, between the frame and a metal foil in contact with the inner surface of the lining of insulating material, including bushings and similar devices				--
	No disruptive discharges during the test				N/A
	If, however, only one such disruptive discharge occurs, ten additional impulses having the same polarity as that which caused the disruptive discharge are applied, the connections being the same as those with which the failure occurred				N/A
	No further disruptive discharge shall occur				N/A
8.4	Temperature rise				P
	Temperature rise does not exceed the limiting values stated in table 6:	sect. 16mm ²			P
9.8.2	Test current: I _N = (reach the steady-state value) Four-pole CB's: <input type="checkbox"/> 1) Three poles loaded 2) One pole and neutral pole loaded <input type="checkbox"/> 1) Four-poles loaded	I _N = 63A			P
	Ambient air temperature	T _{amb} = 22,8°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	L1	≤43	≤42	≤38	P
	L2	≤48	≤46	≤41	

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	L3	≤49	≤49	≤44	
	L4(N)	≤49	≤53	≤50	
	Terminals for external connections 60 K				P
	External parts liable to be touched during manual operation of the circuit-breaker, including operating means of insulating material and metallic means for coupling of insulating operating means of several poles 40 K	≤20	≤20	≤18	P
	External metallic parts of operating means .. 25 K	-	-	-	N/A
	Other external parts, including that face of the circuit-breaker is in direct contact with the mounting surface 60 K	≤41	≤40	≤36	P
9.8.5	Measurement of power losses	B-4	B-5	B-6	P
	Power loss do not exceed the values stated in table 8	13W			P
	Test current: I _N = 63A (reach the steady state value)				P
	Loaded one pole after the other				P
	Max. power loss : 4,9W	W	W	W	P
	L1	≤4,9	≤4,8	≤4,4	P
	L2	≤4,8	≤4,3	≤3,8	
	L3	≤4,7	≤4,5	≤4,1	
	L4(N)	≤4,5	≤4,4	≤4,4	
8.5	Uninterrupted duty				P
	Circuit-breakers operate reliable even after long service				P
9.9	28 day test				P
	28 cycles - 21 h with current - 3 h without current Cross-sectional area. 16mm ²				P
	During the first period of current flow the temperature of the terminals shall be measured				P
	Ambient air temperature	T _{amb} = 23,0°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	Terminals for external connections	≤53	≤56	≤53	P
	During the last period of current flow the temperature of the terminals shall be measured				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Ambient air temperature	Tamb= 23,0°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	Terminals for external connections	≤54	≤57	≤54	P
	The temperature rise does not exceed the value measured during the first period by more than 15 K				P
	Test current 1,45 I _N =91,4A				P
	- Tripping within	[s]	[s]	[s]	P
	- 1h (≤ 63 A)	230	245	210	P
	- 2h (> 63 A)	-	-	-	P

	TESTS „B“ 3 samples 1P;B40;I _{cn} =4500A	B-7	B-8	B-9	--
8.4	Temperature rise				P
	Temperature rise does not exceed the limiting values stated in table 6:	sect. 16mm ²			P
9.8.2	Test current: I _N = (reach the steady-state value) Four-pole CB's: <input checked="" type="checkbox"/> 1) Three poles loaded 2) One pole and neutral pole loaded <input type="checkbox"/> 1) Four-poles loaded	I _N = 63A			P
	Ambient air temperature	Tamb= 22,9°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	L1	≤35	≤39	≤39	P
	L2	-	-	-	
	L3	-	-	-	
	L4(N)	-	-	-	
	Terminals for external connections 60 K				P
	External parts liable to be touched during manual operation of the circuit-breaker, including operating means of insulating material and metallic means for coupling of insulating operating means of several poles 40 K	≤5	≤5	≤5	P
	External metallic parts of operating means .. 25 K	-	-	-	N/A
	Other external parts, including that face of the circuit-breaker is in direct contact with the mounting surface 60 K	≤27	≤28	≤24	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
9.8.5	Measurement of power losses	B-7	B-8	B-9	P
	Power loss do not exceed the values stated in table 8	13W			P
	Test current: $I_N = 63A$ (reach the steady state value)				P
	Loaded one pole after the other				P
	Max. power loss : 5,0W	W	W	W	P
	L1	≤4,4	≤4,6	≤5,0	P
	L2	-	-	-	
	L3	-	-	-	
	L4(N)	-	-	-	

	TESTS „B“ 3 samples 4P;B40;Icn=4500A	B-10	B-11	B-12	--
8.4	Temperature rise				P
	Temperature rise does not exceed the limiting values stated in table 6:	sect. 16mm ²			P
9.8.2	Test current: $I_N =$ (reach the steady-state value) Four-pole CB's: <input checked="" type="checkbox"/> 1) Three poles loaded 2) One pole and neutral pole loaded <input type="checkbox"/> 1) Four-poles loaded	$I_N = 63A$			P
	Ambient air temperature	Tamb= 23,2°C			P
	Parts Temperature rise [K]	[K]	[K]	[K]	P
	L1	≤48	≤41	≤44	P
	L2	≤53	≤45	≤49	
	L3	≤53	≤45	≤49	
	L4(N)	≤46	≤39	≤43	
	Terminals for external connections 60 K				P
	External parts liable to be touched during manual operation of the circuit-breaker, including operating means of insulating material and metallic means for coupling of insulating operating means of several poles 40 K	≤22	≤19	≤21	P
	External metallic parts of operating means .. 25 K	-	-	-	N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Other external parts, including that face of the circuit-breaker is in direct contact with the mounting surface 60 K	≤48	≤41	≤45	P
9.8.5	Measurement of power losses	B-10	B-11	B-12	P
	Power loss do not exceed the values stated in table 8	13W			P
	Test current: $I_N = 63A$ (reach the steady state value)				P
	Loaded one pole after the other				P
	Max. power loss : 5,4W	W	W	W	P
	L1	≤5,4	≤4,9	≤5,2	P
	L2	≤5,4	≤4,8	≤5,2	
	L3	≤4,9	≤4,3	≤4,8	
	L4(N)	≤4,7	≤4,2	≤4,6	

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „C“ 3 +3 samples 1P;C63;Icn=4500A				--
8.7	Test „C1“ Mechanical and electrical endurance	C₁₋₁	C₁₋₂	C₁₋₃	P
	Circuit-breaker shall be capable to perform an adequate number of cycles with rated current				P
9.11.1	General test conditions				P
	Test: Test Voltage 243V (rated voltage 240V) Test Current 63,4A (rated current 63A) Power factor 0,87(0,85-0,9) Cross sect. area 16mm ²				P
9.11.2	Test procedure				P
	The circuit-breaker is submitted to 4000 operating cycles with rated current.				P
	- I _N ≤ 32 A: 2 s on - 13 s off				N/A
	- I _N > 32 A: 2 s on - 28 s off				P
	During the test the circuit-breaker shall be operated as in normal use.				P
9.11.3	Conditions of the circuit breaker after the tests.				P
	Following the test 9.11.2 the sample shall not show:				P
	- undue wear				P
	- discrepancy between the position of the moving contacts and corresponding position of the Indicating device				P
	- damage to the enclosure permitting access to live parts by test finger (see 9.6)				P
	- loosening of electrical or mechanical connections				P
	- seepage of sealing compound				P
	Moreover test current2,55 I _N _____A	160,7A			P
	Opening time not less 1 s or more than	[s]	[s]	[s]	P
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	24	29	31	P
	Dielectric strength reduced to 1500 V				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
9.12.11.2	Test at reduced short-circuit currents				P
9.12.11.2.1	Test on all circuit-breakers				P
	Test at reduced short-circuit currents: Fig. 3				P
	Test current:	Obtained			--
	- 500 A or 10 In	I test =644A			--
	Test voltage 1,05 Un	Un =251V			--
	Power factor 0,93-0,98	0,96			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35 mm			P
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____ x _____ x _____ mm			N/A
	I _{Peak} (A) max. value	874A			--
	Sequence: 6 x "O" and 3 x "CO"	[kA ² s]	[kA ² s]	[kA ² s]	--
	Max. I ² t ≤4,70kA ² s	4,55	3,18	4,70	P
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12	Verification of the circuit-breaker after short-circuit tests				P
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times Un.=457V. The circuit -breaker is in the open position	C ₁₋₁ [mA]	C ₁₋₂ [mA]	C ₁₋₃ [mA]	P
	The leakage current shall not exceed 2 mA	L1	L2	L3	P
		0,002	0,001	0,001	P
		L2	-	-	N/A
		L3	-	-	N/A
		L4(N)	-	-	N/A
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)	1500V			P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	a)	1500V	P
	b)	-	N/A
	c)	1500V	P
	d) 2000 V	-	N/A

TESTS „C“ 3 +3 samples 4P;C63;Icn=4500A					--
8.7	Test „C1“ Mechanical and electrical endurance	C _{1.4}	C _{1.5}	C _{1.6}	P
	Circuit-breaker shall be capable to perform an adequate number of cycles with rated current				P
9.11.1	General test conditions				P
	Test: Test Voltage 418V (rated voltage 415V) Test Current 63,6A (rated current 63A) Power factor 0,87(0,85-0,9) Cross sect. area 16mm ²				P
9.11.2	Test procedure				P
	The circuit-breaker is submitted to 4000 operating cycles with rated current.				P
	- I _N ≤ 32 A: 2 s on - 13 s off				N/A
	- I _N > 32 A: 2 s on - 28 s off				P
	During the test the circuit-breaker shall be operated as in normal use.				P
9.11.3	Conditions of the circuit breaker after the tests.				P
	Following the test 9.11.2 the sample shall not show:				P
	- undue wear				P
	- discrepancy between the position of the moving contacts and corresponding position of the Indicating device				P
	- damage to the enclosure permitting access to live parts by test finger (see 9.6)				P
	- loosening of electrical or mechanical connections				P
	- seepage of sealing compound				P
	Moreover test current2,55 I _N _____ A	160,7A			P
	Opening time not less 1 s or more than	[s]	[s]	[s]	P
	- 60 s (≤ 32 A)	-	-	-	N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	- 120 s (> 32 A)	24	29	21	P
	Dielectric strength reduced to 1500 V				P
9.12.11.2	Test at reduced short-circuit currents				P
9.12.11.2.1	Test on all circuit-breakers				P
	Test at reduced short-circuit currents: Fig. 3				P
	Test current:	Obtained			--
	- 500 A or 10 In	I test =644A			--
	Test voltage 1,05 Un	Un =251V			--
	Power factor 0,93-0,98	0,96			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35 mm			P
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____ x _____ x _____ mm			N/A
	I _{Peak} (A) max. value	887A			--
	Sequence: 6 x "O" and 3 x "CO"	[kA ² s]	[kA ² s]	[kA ² s]	--
	Max. I ² t ≤5,45kA ² s	4,43	4,62	5,45	P
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12	Verification of the circuit-breaker after short-circuit tests				P
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times Un.=457V. The circuit –breaker is in the open position	C₁₋₄ [mA]	C₁₋₅ [mA]	C₁₋₆ [mA]	P
	The leakage current shall not exceed 2 mA L1	0,001	0,002	0,001	P
	L2	0,001	0,002	0,001	P
	L3	0,001	0,001	0,001	P
	L4(N)	0,001	0,001	0,002	P

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	Electric strength test:		P
	Test voltage 1500 V (see 9.7.3)	1500V	P
	a)	1500V	P
	b)	1500V	P
	c)	1500V	P
	d) 2000 V	-	N/A

9.12.11.2.2	Test „C₂“ Short-circuit test on circuit-breakers for use in IT systems 1P;C63;Icn=4500A					--
	Test current:					--
	- 500 A or 1,2 times the upper limit of the standard range of instantaneous tripping (see table 2) whichever is the higher, but < 2500 A. When tripping exceed 20 In the current adjusted at 1,2 times the upper limit even when higher 2500 A	I test=762A				--
	Test voltage 1,05 Un	Un =435V				--
	Power factor 0,93-0,98	0,95				--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35mm				--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____x_____x_____mm				--
	I _{Peak} (A) max. value	1,06kA				--
	Sequence: "O" + "CO" on each protected pole	[kA ² s]	[kA ² s]	[kA ² s]		--
	Shifted point 30 ° on the other protected pole	C₂₋₁	C₂₋₂	C₂₋₃		--
	Max. I ² t ≤4,52kA ² s	L1 4,52	L2 4,27	L3 4,21	L4 (N) -	P
	- No permanent arcing					P
	- No flash-over between poles or between poles and frame					P
	- No blowing of the fuses F and F'					P
	- Polyethylene foil shows no holes					P
	After the test:					--
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.					P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=264V$. The circuit – breaker is in the open position	C₂₋₁ [mA]	C₂₋₂ [mA]	C₂₋₃ [mA]	--
	The leakage current shall not exceed 2 mA L1	0,001	0,001	0,002	P
	L2	-	-	-	N/A
	L3	-	-	-	N/A
	L4(N)	-	-	-	N/A
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P
	b)				N/A
	c)	1500V			P
	d) 2000 V				N/A

9.12.11.2.2	Test „C₂“ Short-circuit test on circuit-breakers for use in IT systems 2P;C63;Icn=4500A				--
	Test current:				--
	- 500 A or 1,2 times the upper limit of the standard range of instantaneous tripping (see table 2) whichever is the higher, but < 2500 A. When tripping exceed 20 In the current adjusted at 1,2 times the upper limit even when higher 2500 A	I test=762A			--
	Test voltage 1,05 U_n	$U_n =435V$			--
	Power factor 0,93-0,98	0,95			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____x_____x_____mm			--
	I_{Peak} (A) max. value	1,05kA			--
	Sequence: "O" + "CO" on each protected pole	[kA ² s]	[kA ² s]	[kA ² s]	--
	Shifted point 30 ° on the other protected pole	C₂₋₄	C₂₋₅		--
	Max. $I^2t \leq 5,00kA^2s$	L1	L2	L3	P
		5,00	4,77	-	
		L2	4,59	4,82	-
		L3	-	-	-
		L4 (N)	-	-	-

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457V$. The circuit – breaker is in the open position	$C_{2.4}$ [mA]	$C_{2.5}$ [mA]		--
	The leakage current shall not exceed 2 mA L1	0,001	0,001	-	P
	L2	0,002	0,001	-	P
	L3	-	-	-	N/A
	L4(N)	-	-	-	N/A
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P
	b)	1500V			P
	c)	1500V			P
	d) 2000 V				N/A

9.12.11.2.2	Test „C₂“ Short-circuit test on circuit-breakers for use in IT systems 4P;C63;Icn=4500A				--
	Test current:				--
	- 500 A or 1,2 times the upper limit of the standard range of instantaneous tripping (see table 2) whichever is the higher, but < 2500 A. When tripping exceed 20 In the current adjusted at 1,2 times the upper limit even when higher 2500 A	I test=762A			--
	Test voltage 1,05 Un	Un =435V			--
	Power factor 0,93-0,98	0,95			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35mm			--

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____x_____x_____mm			--
	I_{Peak} (A) max. value	1,03kA			--
	Sequence: "O" + "CO" on each protected pole	[kA ² s]	[kA ² s]	[kA ² s]	--
	Shifted point 30 ° on the other protected pole	C₂₋₁₁			--
	Max. $I^2t \leq 1,03kA^2s$	L1	1,02		P
		L2	1,03		
		L3	1,02		
		L4 (N)	0,89		
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457V$. The circuit – breaker is in the open position	C₂₋₁₁ [mA]			--
	The leakage current shall not exceed 2 mA L1	0,001			P
		L2	0,001		P
		L3	0,001		P
		L4(N)	0,002		P
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P
	b)	1500V			P
	c)	1500V			P
	d) 2000 V				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „D“ 3 samples 1P;C63;Icn=4500A				--
8.6	Automatic operation				P
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀+D₁₋₁	D₀+D₁₋₂	D₀+D₁₋₃	P
	I _N (A)	63A			--
	Sect. (mm ²)	16mm ²			--
	Instantaneous tripping current	<input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D			--
9.10.1	General				P
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				P
9.10.2	Test of time-current characteristic				P
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:	71,2A			P
	- 1 h (I _N ≤ 63 A)				P
	- 2 h (I _N > 63 A)				N/A
	No tripping				P
	Then steadily increased within 5 s to 1,45 I _N (A)	91,4A			P
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	98	85	106	P
	- 2h (> 63 A)	-	-	-	P
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:	160,7A			P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	24	18	31	P
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P
	The tripping time of the O operation is measured				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current $3I_N$ (A), starting from cold	_____A			--
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $5 I_N$ (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current $5I_N$ (A), starting from cold	315A			P
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s	1	1	1	P
	Test current $10 I_N$ (A), starting from cold	640A			P
	Tripping less than 0,1 s	11ms	12ms	11ms	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current $10I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature	T = -5°C			P
	Test current 1,13 I _N (A)	71,2A			P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I _N (A) within 5s	119,7A			P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	78	64	92	P
	- 2h (> 63 A)	-	-	-	N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature	40°C			P
	Test current I _N (A)	63A			P
	No tripping within				--
	- 1h (≤ 63 A)				P
	- 2h (> 63 A)				N/A
	Tests „D₁“	D_{0+D₁₋₁}	D_{0+D₁₋₂}	D_{0+D₁₋₃}	--
8.9	Resistance to mechanical shock and impact				P
	CB shall have adequate mechanical behaviour so as to withstand the stresses imposed during installation and use				P
9.13.1	Mechanical shock				P
	- 50 falls on two sides of vertical board C				P
	- Vertical board turned 90°				P
	- 50 falls on two sides of vertical board C				P
	During the test the circuit-breakers shall not open				P
9.13.2	Mechanical impact				P
9.13.2.2	All types:				P
	- Impact test: 10 blows-height 10 cm, no damage				P
9.13.2.3	Screw-in types:				N/A
	- Torque 2,5 Nm for 1 min, no damage				N/A
9.13.2.4	CB intended to be mounted on a rail				P
	- downward vertical 50 N for 1 min				P
	- upward vertical 50 N for 1 min, no damage				P
9.13.2.5	Plug-in types				N/A

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
	The circuit-breaker are mounted in their normal position, complete with plug-in base but without cables and any cover plate				N/A	
	A force of 20 N applied for 1min to the circuit-breaker (see fig 16).				N/A	
	During this test the circuit-breaker part shall not become loose from the base and shall not show damage impairing further use.				N/A	
9.12.11.3	Test at 1500 A:				P	
	Prospective current of 1500 A - power factor 0,93 to 0,98				P	
	If the neutral of a four-pole circuit-breaker is not marked by the manufacturer, four samples are tested using successively a different pole as the neutral				P	
	Prospective current obtained (A)	1,51kA			--	
	Power factor	0,94			--	
	Test voltage 1,05 Un	251V			--	
	Test circuit: figure	3			--	
	T (min)	3min			--	
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35mm			--	
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____x_____x_____mm			--	
	Sequence	6O-2CO+1O in test circuit specified for three-pole circuit-breakers			--	
	I_{Peak} (A) max. value	1,94kA			--	
	$I^2t \leq$ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--	
	Max. $I^2t \leq 10,3kA^2s$	L1	9,98	10,3	9,71	P
		L2	-	-	-	
		L3	-	-	-	
		L4(N)	-	-	-	
	- No permanent arcing				P	
	- No flash-over between poles or between poles and frame				P	
	- No blowing of the fuses F and F'				P	
	- Polyethylene foil shows no holes				P	
	After the test:				--	

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457V$. The circuit -breaker is in the open position	D_0+D_{1-1} [mA]	D_0+D_{1-2} [mA]	D_0+D_{1-3} [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,002	0,003	0,001	P
		L2	-	-	-	N/A
		L3	-	-	-	N/A
		L4(N)	-	-	-	N/A
	Electric strength test:				P	
	Test voltage 1500 V (see 9.7.3)				P	
	a)		1500V		P	
	b)				N/A	
	c)		1500V		P	
	d) 2000 V				N/A	
	Test current 0.85x non-tripping current (1,13 I_N)		60,5A		P	
	- Passed for 1h				P	
	- Passed for 2h				N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s		100,4A		P	
		D_0+D_{1-1} [s]	D_0+D_{1-2} [s]	D_0+D_{1-3} [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour		62	47	51	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „D“ 3 samples 4P;C63;Icn=4500A				--
8.6	Automatic operation				P
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀+D₁₋₄	D₀+D₁₋₅	D₀+D₁₋₆	P
	I _N (A)	63A			--
	Sect. (mm ²)	16mm ²			--
	Instantaneous tripping current	<input type="checkbox"/> B <input checked="" type="checkbox"/> C <input type="checkbox"/> D			--
9.10.1	General				P
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				P
9.10.2	Test of time-current characteristic				P
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:	71,2A			P
	- 1 h (I _N ≤ 63 A)				P
	- 2 h (I _N > 63 A)				N/A
	No tripping				P
	Then steadily increased within 5 s to 1,45 I _N (A)	91,4A			P
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	114	92	87	P
	- 2h (> 63 A)	-	-	-	P
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:	160,7A			P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	32	27	24	P
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P
	The tripping time of the O operation is measured				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current $3I_N$ (A), starting from cold	_____A			--
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $5 I_N$ (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current $5I_N$ (A), starting from cold	315A			P
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s	1	1	1	P
	Test current $10 I_N$ (A), starting from cold	640A			P
	Tripping less than 0,1 s	18ms	14ms	69ms	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current $10I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				P
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	109,6A			P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	98	84	75	P
	- 2h (> 63 A)	-	-	-	N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature	T = -5°C			P
	Test current 1,13 I _N (A)	71,2A			P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I _N (A) within 5s	119,7A			P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	87	74	62	P
	- 2h (> 63 A)	-	-	-	N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature	40°C			P
	Test current I _N (A)	63A			P
	No tripping within				--
	- 1h (≤ 63 A)				P
	- 2h (> 63 A)				N/A
	Tests „D₁“	D_{0+D₁₋₄}	D_{0+D₁₋₅}	D_{0+D₁₋₆}	--
8.9	Resistance to mechanical shock and impact				P
	CB shall have adequate mechanical behaviour so as to withstand the stresses imposed during installation and use				P
9.13.1	Mechanical shock				P
	- 50 falls on two sides of vertical board C				P
	- Vertical board turned 90°				P
	- 50 falls on two sides of vertical board C				P
	During the test the circuit-breakers shall not open				P
9.13.2	Mechanical impact				P
9.13.2.2	All types:				P
	- Impact test: 10 blows-height 10 cm, no damage				P
9.13.2.3	Screw-in types:				N/A
	- Torque 2,5 Nm for 1 min, no damage				N/A
9.13.2.4	CB intended to be mounted on a rail				P
	- downward vertical 50 N for 1 min				P
	- upward vertical 50 N for 1 min, no damage				P
9.13.2.5	Plug-in types				N/A

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
	The circuit-breaker are mounted in their normal position, complete with plug-in base but without cables and any cover plate				N/A	
	A force of 20 N applied for 1min to the circuit-breaker (see fig 16).				N/A	
	During this test the circuit-breaker part shall not become loose from the base and shall not show damage impairing further use.				N/A	
9.12.11.3	Test at 1500 A:				P	
	Prospective current of 1500 A - power factor 0,93 to 0,98				P	
	If the neutral of a four-pole circuit-breaker is not marked by the manufacturer, four samples are tested using successively a different pole as the neutral				P	
	Prospective current obtained (A)	1,54kA			--	
	Power factor	0,96			--	
	Test voltage 1,05 Un	437V			--	
	Test circuit: figure	3			--	
	T (min)	3min			--	
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35mm			--	
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____x_____x_____mm			--	
	Sequence	6O-3CO			--	
	I_{Peak} (A) max. value	1,74kA			--	
	$I^2t \leq$ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--	
	Max. $I^2t \leq 19,2kA^2s$	L1	19,2	11,6	10,7	P
		L2	7,96	9,93	9,69	
		L3	11,0	10,6	9,59	
		L4(N)	-	-	-	
	- No permanent arcing				P	
	- No flash-over between poles or between poles and frame				P	
	- No blowing of the fuses F and F'				P	
	- Polyethylene foil shows no holes				P	
	After the test:				--	

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457V$. The circuit –breaker is in the open position	$D_{O+D_{1.4}}$ [mA]	$D_{O+D_{1.5}}$ [mA]	$D_{O+D_{1.6}}$ [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,001	0,002	0,001	P
		L2	0,002	0,002	0,001	P
		L3	0,002	0,001	0,001	P
		L4(N)	0,001	0,001	0,001	P
	Electric strength test:				P	
	Test voltage 1500 V (see 9.7.3)				P	
	a)	1500V			P	
	b)	1500V			P	
	c)	1500V			P	
	d) 2000 V				N/A	
	Test current 0.85x non-tripping current (1,13 I_N)	60,5A			P	
	- Passed for 1h				P	
	- Passed for 2h				N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s	100,5A			P	
		$D_{O+D_{1.4}}$ [s]	$D_{O+D_{1.5}}$ [s]	$D_{O+D_{1.6}}$ [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	75	71	51	P	

	Tests „D₁“ The neutral of a four-pole circuit-breaker is not marked by the manufacturer, four samples are tested using successively a different pole as the neutral 4P;C63;Icn=4500A	$D_{O+D_{1.7}}$ 7	$D_{O+D_{1.8}}$ 8	$D_{O+D_{1.9}}$ 9	$D_{O+D_{1.10}}$ 10	--
8.9	Resistance to mechanical shock and impact					N/A
	CB shall have adequate mechanical behaviour so as to withstand the stresses imposed during installation and use					N/A
9.13.1	Mechanical shock					N/A
	- 50 falls on two sides of vertical board C					N/A
	- Vertical board turned 90°					N/A
	- 50 falls on two sides of vertical board C					N/A

IEC 60898-1			
Clause	Requirement + Test	Result - Remark	Verdict
	During the test the circuit-breakers shall not open		N/A
9.13.2	Mechanical impact		N/A
9.13.2.2	All types:		N/A
	- Impact test: 10 blows-height 10 cm, no damage		N/A
9.13.2.3	Screw-in types:		N/A
	- Torque 2,5 Nm for 1 min, no damage		N/A
9.13.2.4	CB intended to be mounted on a rail		N/A
	- downward vertical 50 N for 1 min		N/A
	- upward vertical 50 N for 1 min, no damage		N/A
9.13.2.5	Plug-in types		N/A
	The circuit-breaker are mounted in their normal position, complete with plug-in base but without cables and any cover plate		N/A
	A force of 20 N applied for 1min to the circuit-breaker (see fig 16).		N/A
	During this test the circuit-breaker part shall not become loose from the base and shall not show damage impairing further use.		N/A
9.12.11.3	Test at 1500 A:		P
	Prospective current of 1500 A - power factor 0,93 to 0,98		P
	If the neutral of a four-pole circuit-breaker is not marked by the manufacturer, four samples are tested using successively a different pole as the neutral		P
	Prospective current obtained (A)	1,54kA	--
	Power factor	0,96	--
	Test voltage 1,05 Un	437V	--
	Test circuit: figure	3	--
	T (min)	3min	--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =35mm	--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimension of enclosure: _____x_____x_____mm	--
	Sequence	6O-3CO	--
	I _{Peak} (A) max. value	1,76kA	--

IEC 60898-1							
Clause	Requirement + Test	Result - Remark				Verdict	
	$I^2t \leq \text{_____ kA}^2\text{s}$	[kA ² s]	[kA ² s]	[kA ² s]	[kA ² s]	--	
	Max. $I^2t \leq 12,5\text{kA}^2\text{s}$	L1	10,4	11,3	12,2	10,6	P
		L2	8,35	11,5	10,2	9,25	
		L3	10,4	10,1	12,5	10,3	
		L4(N)	-	-	-	-	
	- No permanent arcing					P	
	- No flash-over between poles or between poles and frame					P	
	- No blowing of the fuses F and F'					P	
	- Polyethylene foil shows no holes					P	
	After the test:					--	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.					P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457\text{V}$. The circuit -breaker is in the open position	D_0+D_{1-} 7 [mA]	D_0+D_{1-} 8 [mA]	D_0+D_{1-} 9 [mA]	D_0+D_{1-} 10 [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,002	0,001	0,002	0,001	P
		L2	0,001	0,001	0,002	0,002	P
		L3	0,003	0,001	0,001	0,001	P
		L4(N)	0,001	0,001	0,001	0,001	P
	Electric strength test:					P	
	Test voltage 1500 V (see 9.7.3)					P	
	a)	1500V				P	
	b)	1500V				P	
	c)	1500V				P	
	d) 2000 V					N/A	
	Test current 0.85x non-tripping current (1,13 I_N)	60,5A				P	
	- Passed for 1h					P	
	- Passed for 2h					N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s	100,5A				P	
		D_0+D_{1-} 7 [s]	D_0+D_{1-} 8 [s]	D_0+D_{1-} 9 [s]	D_0+D_{1-} 10 [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	81	65	59	58	P	

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „D“ 3 samples 1P;C2;Icn=4500A 1P;C4;Icn=4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₁	D₀₋₂	-	P
	I _N (A)	2A	4A	-	--
	Sect. (mm ²)	1mm ²	1mm ²	-	--
	Instantaneous tripping current	<input type="checkbox"/> B	<input checked="" type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				P
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				P
9.10.2	Test of time-current characteristic				P
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:	2,26A	4,52A	-	P
	- 1 h (I _N ≤ 63 A)				P
	- 2 h (I _N > 63 A)				N/A
	No tripping				P
	Then steadily increased within 5 s to 1,45 I _N (A)	2,90A	5,80A	-	P
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	75	86	-	P
	- 2h (> 63 A)	-	-	-	P
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:	5,10A	10,2A	-	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	27	28	-	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current $3I_N$ (A), starting from cold	_____A			--
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $5 I_N$ (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current $5I_N$ (A), starting from cold	10,0A	20,0A		P
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s	1	1	-	P
	Test current $10 I_N$ (A), starting from cold	20A	41A	-	P
	Tripping less than 0,1 s	14ms	15ms	-	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current $10I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature	T = -5°C			P
	Test current 1,13 I _N (A)	2,26A	4,52A	-	P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I _N (A) within 5s	3,80A	7,60A	-	P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	61	73	-	P
	- 2h (> 63 A)	-	-	-	N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature	40°C			P
	Test current I _N (A)	2A	4A	-	P
	No tripping within				--
	- 1h (≤ 63 A)				P
	- 2h (> 63 A)				N/A
	TESTS „D“ 3 samples 1P;C6;I _{cn} =4500A 1P;C10;I _{cn} =4500A 1P;C16;I _{cn} =4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₃	D₀₋₄	D₀₋₅	P
	I _N (A)	6A	10A	16A	--
	Sect. (mm ²)	1mm ²	1,5mm ²	2,5mm ²	--
	Instantaneous tripping current	<input type="checkbox"/> B	<input checked="" type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				P
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				P
9.10.2	Test of time-current characteristic				P
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:	6,78A	11,3A	18,1A	P
	- 1 h (I _N ≤ 63 A)				P
	- 2 h (I _N > 63 A)				N/A
	No tripping				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Then steadily increased within 5 s to 1,45 I _N (A)	8,70A	14,5A	23,2A	P
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	65	95	66	P
	- 2h (> 63 A)	-	-	-	P
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:	15,3A	25,5A	40,8A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	19	24	20	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3I _N (A), starting from cold	_____A			--
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A
	Test current 5 I _N (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5I _N (A), starting from cold	30A	50A	80A	P
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s	1	1	1	P
	Test current 10 I _N (A), starting from cold	61,2A	101A	162A	P
	Tripping less than 0,1 s	14ms	14ms	13ms	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10I _N (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current 1,1 It (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current 1,2 It (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				P
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature	T = -5°C			P
	Test current 1,13 I_N (A)	6,78A	11,3A	18,1A	P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I_N (A) within 5s	11,4A	19,0A	30,4A	P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	52	73	51	P
	- 2h (> 63 A)	-	-	-	N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature	40°C			P
	Test current I_N (A)	6A	10A	16A	P
	No tripping within				--
	- 1h (≤ 63 A)				P
	- 2h (> 63 A)				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „D“ 3 samples 1P;C20;Icn=4500A 1P;C25;Icn=4500A 1P;C32;Icn=4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₆	D₀₋₇	D₀₋₈	P
	I _N (A)	20A	25A	32A	--
	Sect. (mm ²)	2,5mm ²	4mm ²	6mm ²	--
	Instantaneous tripping current	<input type="checkbox"/> B	<input checked="" type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				P
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				P
9.10.2	Test of time-current characteristic				P
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:	22,6A	28,3A	36,2A	P
	- 1 h (I _N ≤ 63 A)				P
	- 2 h (I _N > 63 A)				N/A
	No tripping				P
	Then steadily increased within 5 s to 1,45 I _N (A)	29,0A	36,3A	46,4A	P
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	97	104	84	P
	- 2h (> 63 A)	-	-	-	P
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:	51A	63,8A	81,6A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	29	28	23	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current $3I_N$ (A), starting from cold	_____A			--
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $5 I_N$ (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current $5I_N$ (A), starting from cold	100A	125A	160A	P
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s	1	1	1	P
	Test current $10 I_N$ (A), starting from cold	206A	253A	330A	P
	Tripping less than 0,1 s	13ms	11ms	13ms	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current $10I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature	T = -5°C			P
	Test current 1,13 I _N (A)	22,6A	28,3A	36,2A	P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I _N (A) within 5s	38,0A	47,5A	60,8A	P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	65	84	63	P
	- 2h (> 63 A)	-	-	-	N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature	40°C			P
	Test current I _N (A)	20A	25A	32A	P
	No tripping within				--
	- 1h (≤ 63 A)				P
	- 2h (> 63 A)				N/A
	TESTS „D“ 3 samples 1P;C40;I _{cn} =4500A 1P;C50;I _{cn} =4500A 1P;C63;I _{cn} =4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₉	D₀₋₁₀	D₀₋₁₁	P
	I _N (A)	40A	50A	63A	--
	Sect. (mm ²)	10mm ²	10mm ²	16mm ²	--
	Instantaneous tripping current	<input type="checkbox"/> B	<input checked="" type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				P
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				P
9.10.2	Test of time-current characteristic				P
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:	45,2A	56,5A	71,2A	P
	- 1 h (I _N ≤ 63 A)				P
	- 2 h (I _N > 63 A)				N/A
	No tripping				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Then steadily increased within 5 s to 1,45 I _N (A)	58,0A	72,5A	91,4	P
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	74	114	73	P
	- 2h (> 63 A)	-	-	-	P
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:	102A	127,5A	160,7A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	19	33	24	P
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3I _N (A), starting from cold	_____A			--
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A
	Test current 5 I _N (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5I _N (A), starting from cold	200A	250A	315A	P
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s	1	1	1	P
	Test current 10 I _N (A), starting from cold	403A	503A	640A	P
	Tripping less than 0,1 s	13ms	14ms	14ms	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10I _N (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current 1,1 It (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current 1,2 It (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				P
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature	T = -5°C			P
	Test current 1,13 I_N (A)	45,2A	56,5A	71,2A	P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I_N (A) within 5s	76,0A	95,0A	119,7A	P
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)	54	95	53	P
	- 2h (> 63 A)	-	-	-	N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature	40°C			P
	Test current I_N (A)	40A	50A	63A	P
	No tripping within				--
	- 1h (≤ 63 A)				P
	- 2h (> 63 A)				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „D“ 3 samples 1P;B2;Icn=4500A 1P;B4;Icn=4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₁₂	D₀₋₁₃	P	
	I _N (A)	-	2A	4A	--
	Sect. (mm ²)	-	1mm ²	1mm ²	--
	Instantaneous tripping current	<input checked="" type="checkbox"/> B	<input type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				N/A
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				N/A
9.10.2	Test of time-current characteristic				N/A
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:				N/A
	- 1 h (I _N ≤ 63 A)				N/A
	- 2 h (I _N > 63 A)				N/A
	No tripping				N/A
	Then steadily increased within 5 s to 1,45 I _N (A)				N/A
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current $3I_N$ (A), starting from cold	-	6A	12A	--
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s	-	10	9	P
	Test current $5 I_N$ (A), starting from cold	-	10A	20A	P
	Tripping less than 0,1 s	-	16ms	14ms	P
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current $5I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $10 I_N$ (A), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current $10I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature				N/A
	Test current $1,13 I_N$ (A)				N/A
	- Passed for 1h				N/A
	- Passed for 2h				N/A
	Current is then steadily increased to $1,9 I_N$ (A) within 5s				N/A
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature				N/A
	Test current I_N (A)				N/A
	No tripping within				--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	TESTS „D“ 3 samples 1P;B6;Icn=4500A 1P;B10;Icn=4500A 1P;B16;Icn=4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₁₄	D₀₋₁₅	D₀₋₁₆	P
	I_N (A)	6A	10A	16A	--
	Sect. (mm ²)	1mm ²	1,5mm ²	2,5mm ²	--
	Instantaneous tripping current	<input checked="" type="checkbox"/> B	<input type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				N/A
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				N/A
9.10.2	Test of time-current characteristic				N/A
9.10.2.1	Test current $1,13 I_N$ (A) starting from cold for:				N/A
	- 1 h ($I_N \leq 63$ A)				N/A
	- 2 h ($I_N > 63$ A)				N/A
	No tripping				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Then steadily increased within 5 s to 1,45 I _N (A)				N/A
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current 3I _N (A), starting from cold	18A	30A	48A	--
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s	11	8	11	P
	Test current 5 I _N (A), starting from cold	30A	50A	82A	P
	Tripping less than 0,1 s	14ms	14ms	15ms	P
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current 5I _N (A), starting from cold	_____A			N/A
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A
	Test current 10 I _N (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10I _N (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				N/A
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature				N/A
	Test current $1,13 I_N$ (A)				N/A
	- Passed for 1h				N/A
	- Passed for 2h				N/A
	Current is then steadily increased to $1,9 I_N$ (A) within 5s				N/A
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature				N/A
	Test current I_N (A)				N/A
	No tripping within				--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „D“ 3 samples 1P;B20;Icn=4500A 1P;B25;Icn=4500A 1P;B32;Icn=4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₁₇	D₀₋₁₈	D₀₋₁₉	P
	I _N (A)	20A	25A	32A	--
	Sect. (mm ²)	2,5mm ²	4mm ²	6mm ²	--
	Instantaneous tripping current	<input checked="" type="checkbox"/> B	<input type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				N/A
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				N/A
9.10.2	Test of time-current characteristic				N/A
9.10.2.1	Test current 1,13 I _N (A) starting from cold for:				N/A
	- 1 h (I _N ≤ 63 A)				N/A
	- 2 h (I _N > 63 A)				N/A
	No tripping				N/A
	Then steadily increased within 5 s to 1,45 I _N (A)				N/A
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current $3I_N$ (A), starting from cold	60A	75A	96A	--
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s	9	8	12	P
	Test current $5 I_N$ (A), starting from cold	101A	125A	162A	P
	Tripping less than 0,1 s	16ms	9ms	15ms	P
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current $5I_N$ (A), starting from cold	_____A			N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $10 I_N$ (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current $10I_N$ (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	$\geq 0,1$ s				N/A
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current $1,1 I_t$ (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current $1,2 I_t$ (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature				N/A
	Test current $1,13 I_N$ (A)				N/A
	- Passed for 1h				N/A
	- Passed for 2h				N/A
	Current is then steadily increased to $1,9 I_N$ (A) within 5s				N/A
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature				N/A
	Test current I_N (A)				N/A
	No tripping within				--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	TESTS „D“ 3 samples 1P;B40;Icn=4500A 1P;B50;Icn=4500A 1P;B63;Icn=4500A				--
8.6	Automatic operation				
8.6.1	Standard time-current zone				P
	Tripping characteristic of CB ensures adequate protection of the circuit, without premature operation.				P
9.10	Tests „D₀“	D₀₋₂₀	D₀₋₂₁	D₀₋₂₂	P
	I_N (A)	40A	50A	63A	--
	Sect. (mm ²)	10mm ²	10mm ²	16mm ²	--
	Instantaneous tripping current	<input checked="" type="checkbox"/> B	<input type="checkbox"/> C	<input type="checkbox"/> D	--
9.10.1	General				N/A
	If the test is made in a test chamber, it shall be made in still air; the volume of the test chamber shall be such as not to affect the test results				N/A
9.10.2	Test of time-current characteristic				N/A
9.10.2.1	Test current $1,13 I_N$ (A) starting from cold for:				N/A
	- 1 h ($I_N \leq 63$ A)				N/A
	- 2 h ($I_N > 63$ A)				N/A
	No tripping				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Then steadily increased within 5 s to 1,45 I _N (A)				N/A
	- Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.2.2	Test current 2,55 I _N (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3	Test of instantaneous tripping and of correct opening of the contacts				P
9.10.3.1	General test conditions				P
	For the lower values of the test current the test is made once, at any convenient voltage.				P
	For the upper values of the test current the test is made at rated voltage U _n (phase to neutral) with a power factor between 0,95 and 1.				P
	The sequence of operation is : O-CO-CO-CO Interval time: > 3 min				P
	The tripping time of the O operation is measured				P
	After each operation the indicating means shall show the open position of the contacts				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current 3I _N (A), starting from cold	120A	150A	189A	--
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s	10	11	10	P
	Test current 5 I _N (A), starting from cold	206A	253A	318A	P
	Tripping less than 0,1 s	13ms	17ms	14ms	P
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current 5I _N (A), starting from cold	_____A			N/A
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A
	Test current 10 I _N (A), starting from cold	_____A			N/A
	Tripping less than 0,1 s				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10I _N (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	≥ 0,1 s				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Test current $20 I_N$ (A) or to the maximum instantaneous tripping current(see cl. 6, item j), starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.4	Test of effect of single pole loading on the tripping characteristic of multi-pole circuit-breakers:				N/A
	Test current 1,1 It (A), (two pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	Test current 1,2 It (A), (three pole or four pole) starting from cold	_____A			N/A
	Tripping within	[min]	[min]	[min]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
9.10.5	Test of effect of ambient temperature on the tripping characteristics				N/A
	a) Ambient temperature of (35 ± 2) K below the ambient air reference temperature				N/A
	Test current 1,13 I_N (A)				N/A
	- Passed for 1h				N/A
	- Passed for 2h				N/A
	Current is then steadily increased to 1,9 I_N (A) within 5s				N/A
	Tripping within	[s]	[s]	[s]	--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A
	b) Ambient temperature of (10 ± 2) K above the ambient air reference temperature				N/A
	Test current I_N (A)				N/A
	No tripping within				--
	- 1h (≤ 63 A)				N/A
	- 2h (> 63 A)				N/A

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „E1“ 3 + 3 samples 1P;C2;Icn=4500A				--
9.12.11.4.2	Test E₁: Test at service short-circuit capacity	E₁₋₁	E₁₋₂	E₁₋₃	P
	Service short-circuit capacity (Ics).....:	4500A			--
	Test circuit: figure	3			--
	Test voltage 1,05 Un	252V			--
	Prospective current	4500A			--
	Prospective current obtained.....:	4590A			--
	Power factor	0,75~0,80			--
	Power factor obtained	0,76			--
	Sequence	O-t-O-t-CO			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____ x _____ x _____ mm			--
	I _{Peak} (A) max. value	2,35kA	2,67kA	2,75kA	--
	I ² t ≤ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--
	Max. I ² t ≤ 29,7kA ² s	L1 24,6	L2 29,6	L3 29,7	P
		L2 -	L3 -	L4(N) -	
		L3 -			
		L4(N) -			
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times Un.=457V. The circuit – breaker is in the open position	E₁₋₁ [mA]	E₁₋₂ [mA]	E₁₋₃ [mA]	--
	The leakage current shall not exceed 2 mA	L1 0,001	0,002	0,001	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	L2	-	-	-	P
	L3	-	-	-	P
	L4(N)	-	-	-	P
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P
	b)				N/A
	c)	1500V			P
	d) 2000 V				N/A
	Test current 0.85x non-tripping current (1,13 I _N)	1,92A			P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,1 x tripping current (1,45 I _N) within 5s	3,19A			P
		E ₁₋₁ [s]	E ₁₋₂ [s]	E ₁₋₃ [s]	--
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	62	42	57	P
9.12.11.4.2	Test „E₁“(Test at service short-circuit capacity) three phase tests for single circuit-breakers 1P;C2;I _{cn} =4500A	E₁₋₄	E₁₋₅	E₁₋₆	--
	Service short-circuit capacity (I _{cs}).....:	4500A			--
	Test circuit: figure	3			--
	Test voltage 1,05 Un	436V			--
	Prospective current.....:	4500A			--
	Prospective current obtained.....:	4598A			--
	Power factor	0,75~0,80			--
	Power factor obtained.....:	0,76			--
	Sequence	See table 21			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____x_____x_____mm			N/A
	I _{Peak} (A) max. value	2,57kA			--

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
	- No permanent arcing				P	
	- No flash-over between poles or between poles and frame				P	
	- No blowing of the fuses F and F'				P	
	- Polyethylene foil shows no holes				P	
	After the test:				--	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457V$. The circuit -breaker is in the open position	E₁₋₄ [mA]	E₁₋₅ [mA]	E₁₋₆ [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,001	0,001	0,001	P
		L2	-	-	-	N/A
		L3	-	-	-	N/A
		L4(N)	-	-	-	N/A
	Electric strength test:				P	
	Test voltage 1500 V (see 9.7.3)				P	
	a)	1500V			P	
	b)				N/A	
	c)	1500V			P	
	d) 2000 V				N/A	
	Test current 0.85x non-tripping current (1,13 I_N)	1,92A			P	
	- Passed for 1h				P	
	- Passed for 2h				N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s	3,19A			P	
		E₁₋₄ [s]	E₁₋₅ [s]	E₁₋₆ [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	63	67	82	P	

	TESTS „E₁“ 3 + 3 samples 1P;C63;Icn=4500A				--
9.12.11.4.2	Test E₁: Test at service short-circuit capacity	E₁₋₇	E₁₋₈	E₁₋₉	P
	Service short-circuit capacity (Ics).....: 4500A				--
	Test circuit: figure: 3				--

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	Test voltage 1,05 Un	252V			--
	Prospective current	4500A			--
	Prospective current obtained.....	4590A			--
	Power factor	0,75~0,80			--
	Power factor obtained	0,76			--
	Sequence	O-t-O-t-CO			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____ x _____ x _____ mm			--
	I _{Peak} (A) max. value	4,38Ka	4,29kA	4,03kA	--
	I ² t ≤ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--
	Max. I ² t ≤ 68,0kA ² s	L1 68,0	L2 60,9	L3 62,1	P
		L4(N) -	-	-	
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times Un.=457V. The circuit – breaker is in the open position	E ₁₋₇ [mA]	E ₁₋₈ [mA]	E ₁₋₉ [mA]	--
	The leakage current shall not exceed 2 mA	L1 0,001	L2 0,001	L3 0,001	P
		L4(N) -	-	-	P
		-	-	-	P
		-	-	-	P
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	b)				N/A
	c)	1500V			P
	d) 2000 V				N/A
	Test current 0.85x non-tripping current (1,13 I _N)	60,5A			P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,1 x tripping current (1,45 I _N) within 5s	100,5A			P
		E₁₋₇ [s]	E₁₋₈ [s]	E₁₋₉ [s]	--
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	84	72	65	P
9.12.11.4.2	Test „E₁“(Test at service short-circuit capacity) three phase tests for single circuit-breakers 1P;C63;I _{cn} =4500A	E₁₋₁₀	E₁₋₁₁	E₁₋₁₂	--
	Service short-circuit capacity (I _{cs}).....:	4500A			--
	Test circuit: figure	3			--
	Test voltage 1,05 U _n	436V			--
	Prospective current.....:	4500A			--
	Prospective current obtained.....:	4598A			--
	Power factor	0,75~0,80			--
	Power factor obtained.....:	0,76			--
	Sequence	See table 21			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____x_____x_____mm			N/A
	I _{Peak} (A) max. value	3,76kA			--
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457V$. The circuit –breaker is in the open position	E₁₋₁₀ [mA]	E₁₋₁₁ [mA]	E₁₋₁₂ [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,001	0,001	0,001	P
		L2	-	-	-	N/A
		L3	-	-	-	N/A
		L4(N)	-	-	-	N/A
	Electric strength test:				P	
	Test voltage 1500 V (see 9.7.3)				P	
	a)		1500V		P	
	b)				N/A	
	c)		1500V		P	
	d) 2000 V				N/A	
	Test current 0.85x non-tripping current (1,13 I_N)		60,5A		P	
	- Passed for 1h				P	
	- Passed for 2h				N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s		100,5A		P	
		E₁₋₁₀ [s]	E₁₋₁₁ [s]	E₁₋₁₂ [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour		39	75	66	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	TESTS „E1“ 3 samples 2P;C2;Icn=4500A				--
9.12.11.4.2	Test E₁: Test at service short-circuit capacity	E₁₋₁₃	E₁₋₁₄	E₁₋₁₅	P
	Service short-circuit capacity (Ics).....:	4500A			--
	Test circuit: figure	3			--
	Test voltage 1,05 Un	434V			--
	Prospective current	4500A			--
	Prospective current obtained.....:	4602A			--
	Power factor	0,75~0,80			--
	Power factor obtained	0,76			--
	Sequence	O-t-O-t-CO			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____ x _____ x _____ mm			--
	I _{Peak} (A) max. value	2,45kA	2,43kA	2,81kA	--
	I ² t ≤ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--
	Max. I ² t ≤ 25,5kA ² s	L1 19,7	18,8	25,4	P
		L2 19,9	19,1	25,5	
		L3 -	-	-	
		L4(N) -	-	-	
	- No permanent arcing				P
	- No flash-over between poles or between poles and frame				P
	- No blowing of the fuses F and F'				P
	- Polyethylene foil shows no holes				P
	After the test:				--
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times Un.=457V. The circuit – breaker is in the open position	E₁₋₁₃ [mA]	E₁₋₁₄ [mA]	E₁₋₁₅ [mA]	--
	The leakage current shall not exceed 2 mA	L1 0,001	0,002	0,002	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	L2	0,001	0,001	0,001	P
	L3	-	-	-	P
	L4(N)	-	-	-	P
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P
	b)	1500V			P
	c)	1500V			P
	d) 2000 V				N/A
	Test current 0.85x non-tripping current (1,13 I _N)	1,92A			P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,1 x tripping current (1,45 I _N) within 5s	3,19A			P
		E₁₋₁₃ [s]	E₁₋₁₄ [s]	E₁₋₁₅ [s]	--
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	75	56	62	P

	TESTS „E₁“ 3 samples 2P;C63;Icn=4500A				--
9.12.11.4.2	Test E₁: Test at service short-circuit capacity	E₁₋₁₆	E₁₋₁₇	E₁₋₁₈	P
	Service short-circuit capacity (Ics).....:	4500A			--
	Test circuit: figure	3			--
	Test voltage 1,05 Un	434V			--
	Prospective current	4500A			--
	Prospective current obtained.....:	4602A			--
	Power factor	0,75~0,80			--
	Power factor obtained	0,76			--
	Sequence	O-t-O-t-CO			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____x_____x_____mm			--

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
	I_{Peak} (A) max. value	4,04kA	3,82kA	3,73kA	--	
	$I^2t \leq \text{_____}$ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--	
	Max. $I^2t \leq 50,4\text{kA}^2\text{s}$	L1	47,3	49,8	50,4	P
		L2	48,3	50,1	50,4	
		L3	-	-	-	
		L4(N)	-	-	-	
	- No permanent arcing				P	
	- No flash-over between poles or between poles and frame				P	
	- No blowing of the fuses F and F'				P	
	- Polyethylene foil shows no holes				P	
	After the test:				--	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457\text{V}$. The circuit – breaker is in the open position	E₁₋₁₆ [mA]	E₁₋₁₇ [mA]	E₁₋₁₈ [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,001	0,001	0,001	P
		L2	0,001	0,001	0,001	P
		L3	-	-	-	P
		L4(N)	-	-	-	P
	Electric strength test:				P	
	Test voltage 1500 V (see 9.7.3)				P	
	a)	1500V			P	
	b)	1500V			P	
	c)	1500V			P	
	d) 2000 V				N/A	
	Test current 0.85x non-tripping current (1,13 I_N)	60,5A			P	
	- Passed for 1h				P	
	- Passed for 2h				N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s	100,5A			P	
		E₁₋₁₆ [s]	E₁₋₁₇ [s]	E₁₋₁₈ [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	56	44	80	P	

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
	TESTS „E1“ 3 samples 4P;C2;Icn=4500A				--	
9.12.11.4.2	Test E₁: Test at service short-circuit capacity	E₁₋₁₉	E₁₋₂₀	E₁₋₂₁	P	
	Service short-circuit capacity (Ics).....:	4500A			--	
	Test circuit: figure	3			--	
	Test voltage 1,05 Un	436V			--	
	Prospective current	4500A			--	
	Prospective current obtained.....:	4598A			--	
	Power factor	0,75~0,80			--	
	Power factor obtained	0,76			--	
	Sequence	O-t-O-t-CO			--	
	T (min)	3min			--	
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--	
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____ x _____ x _____ mm			--	
	I _{Peak} (A) max. value	1,83kA	1,57kA	1,89kA	--	
	I ² t ≤ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--	
	Max. I ² t ≤ 11,0kA ² s	L1 L2 L3 L4(N)	6,72 7,62 3,55 -	5,96 6,92 4,09 -	7,96 8,99 11,0 -	
	- No permanent arcing				P	
	- No flash-over between poles or between poles and frame				P	
	- No blowing of the fuses F and F'				P	
	- Polyethylene foil shows no holes				P	
	After the test:				--	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times Un.=457V. The circuit – breaker is in the open position	E₁₋₁₉ [mA]	E₁₋₂₀ [mA]	E₁₋₂₁ [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,002	0,001	0,001	P

IEC 60898-1					
Clause	Requirement + Test	Result - Remark			Verdict
	L2	0,001	0,002	0,003	P
	L3	0,002	0,002	0,001	P
	L4(N)	0,001	0,001	0,001	P
	Electric strength test:				P
	Test voltage 1500 V (see 9.7.3)				P
	a)	1500V			P
	b)	1500V			P
	c)	1500V			P
	d) 2000 V				N/A
	Test current 0.85x non-tripping current (1,13 I _N)	1,92A			P
	- Passed for 1h				P
	- Passed for 2h				N/A
	Current is then steadily increased to 1,1 x tripping current (1,45 I _N) within 5s	3,19A			P
		E₁₋₁₉ [s]	E₁₋₂₀ [s]	E₁₋₂₁ [s]	--
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	53	59	42	P

	TESTS „E₁“ 3 samples 4P;C63;Icn=4500A				--
9.12.11.4.2	Test E₁: Test at service short-circuit capacity	E₁₋₂₂	E₁₋₂₃	E₁₋₂₄	P
	Service short-circuit capacity (Ics).....:	4500A			--
	Test circuit: figure	3			--
	Test voltage 1,05 Un	436V			--
	Prospective current	4500A			--
	Prospective current obtained.....:	4598A			--
	Power factor	0,75~0,80			--
	Power factor obtained	0,76			--
	Sequence	O-t-O-t-CO			--
	T (min)	3min			--
9.12.9.2	Test in free air copper wire F': <input type="checkbox"/> 0,12 mm / <input checked="" type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input checked="" type="checkbox"/> 1,5 Ohm	"a" =45mm			--
9.12.9.3	Test in enclosures copper wire F': <input type="checkbox"/> 0,12 mm / <input type="checkbox"/> 0,16 mm resistor R' : <input type="checkbox"/> 0,75 Ohm / <input type="checkbox"/> 1,5 Ohm	dimensions of enclosure: _____x_____x_____mm			--

IEC 60898-1						
Clause	Requirement + Test	Result - Remark			Verdict	
	I_{Peak} (A) max. value	4,79kA	4,55kA	4,52kA	--	
	$I^2t \leq$ _____ kA ² s	[kA ² s]	[kA ² s]	[kA ² s]	--	
	Max. $I^2t \leq 88,8$ kA ² s	L1	43,7	81,5	46,9	P
		L2	56,1	45,0	62,0	
		L3	82,2	50,6	88,8	
		L4(N)	-	-	-	
	- No permanent arcing				P	
	- No flash-over between poles or between poles and frame				P	
	- No blowing of the fuses F and F'				P	
	- Polyethylene foil shows no holes				P	
	After the test:				--	
9.12.12.1	The circuit-breakers shall show no damage impairing their further use and shall maintenance, withstand the following tests.				P	
	a) leakage current across open contacts, according to 9.7.5.3, each pole is supplied at a voltage 1,1 times $U_n=457$ V. The circuit – breaker is in the open position	E_{1-22} [mA]	E_{1-23} [mA]	E_{1-24} [mA]	--	
	The leakage current shall not exceed 2 mA	L1	0,001	0,002	0,001	P
		L2	0,001	0,002	0,002	P
		L3	0,002	0,002	0,001	P
		L4(N)	0,001	0,001	0,001	P
	Electric strength test:				P	
	Test voltage 1500 V (see 9.7.3)				P	
	a)	1500V			P	
	b)	1500V			P	
	c)	1500V			P	
	d) 2000 V				N/A	
	Test current 0.85x non-tripping current (1,13 I_N)	60,5A			P	
	- Passed for 1h				P	
	- Passed for 2h				N/A	
	Current is then steadily increased to 1,1 x tripping current (1,45 I_N) within 5s	100,5A			P	
		E_{1-22} [s]	E_{1-23} [s]	E_{1-24} [s]	--	
	Tripping within <input checked="" type="checkbox"/> 1 hour / <input type="checkbox"/> 2 hour	73	79	56	P	

IEC 60898-1						
Clause	Requirement + Test	Result - Remark				Verdict
	TESTS „E₂“ 3 + 4 samples					--
9.12.11.4.3	Test „E₂“(Test at rated short-circuit capacity) three phase tests for single circuit-breakers	E₂₋₄	E₂₋₅	E₂₋₆	E₂₋₇	--
	TESTS „E₃“ 3 samples					--
	Annex E					--
	Annex J					--
	Annex K					--
	Annex L					--

TABLE: Heating Test 1P;C63;Icn=4500A				P
Test voltage (V)		--		—
Ambient (°C)		22,7°C		—
Thermocouple Locations	max. temperature measured, (K)			max. temperature limit, (K)
Temperature	B-1	B-2	B-3	--
Terminal	39	43	41	60
Handle	5	6	6	40
Enclosure	30	24	24	60
Supplementary information:N/A				

TABLE: Heating Test 4P;C63;Icn=4500A				P
Test voltage (V)		--		—
Ambient (°C)		22,8°C		—
Thermocouple Locations	max. temperature measured, (K)			max. temperature limit, (K)
Temperature	B-4	B-5	B-6	--
Terminal L1	43	42	38	60
Terminal L2	48	46	41	60
Terminal L3	49	49	44	60
Terminal L4	49	53	50	60
Handle	20	20	18	40
Enclosure	41	40	36	60
Supplementary information:N/A				

TABLE: Heating Test 1P;B63;Icn=4500A				P
Test voltage (V)		--		—
Ambient (°C)		22,9°C		—
Thermocouple Locations	max. temperature measured, (K)			max. temperature limit, (K)
Temperature	B-7	B-8	B-9	--
Terminal	35	39	39	60
Handle	5	5	5	40
Enclosure	27	28	24	60
Supplementary information:N/A				

TABLE: Heating Test 4P;B63;Icn=4500A					P
Test voltage (V)		--			—
Ambient (°C)		23,2 °C			—
Thermocouple Locations		max. temperature measured, (K)			max. temperature limit, (K)
Temperature		B-10	B-11	B-12	--
Terminal	L1	48	41	44	60
Terminal	L2	53	45	49	60
Terminal	L3	53	45	49	60
Terminal	L4	46	39	43	60
Handle		22	19	21	40
Enclosure		48	41	45	60
Supplementary information:N/A					

TABLE: Dielectric Strength 1P;C63;Icn=4500A			P
Test voltage applied between:	Test potential applied (V)	Breakdown / flashover (Yes/No)	
In off-position, between the terminals which are electrically connected together when the circuit-breaker is in the closed position.	2000V	No	
In off-position, between each pole in turn and the others connected together.	-	-	
In on-position, between all poles connected together and the frame.	2000V	No	
Supplementary information:N/A			

TABLE: Dielectric Strength 4P;C63;Icn=4500A			P
Test voltage applied between:	Test potential applied (V)	Breakdown / flashover (Yes/No)	
In off-position, between the terminals which are electrically connected together when the circuit-breaker is in the closed position.	2000V	No	
In off-position, between each pole in turn and the others connected together.	2000V	No	
In on-position, between all poles connected together and the frame.	2000V	No	
Supplementary information:N/A			

TABLE: insulation resistance measurements 1P;C63;Icn=4500A				P
Insulation resistance R between:	R (MΩ)			Required R (MΩ)
	B-1	B-2	B-3	
a) In off-position, between the terminals which are electrically connected together when the circuit-breaker is in the closed position	563	638	601	≥ 2 MΩ
b) in off-position, between each pole in turn and the others connected together	-	-	-	-
c) in on-position, between all poles connected together and the frame	1300	1130	1100	≥ 5 MΩ
Supplementary information:N/A				

TABLE: insulation resistance measurements 4P;C63;Icn=4500A				P
Insulation resistance R between:	R (MΩ)			Required R (MΩ)
	B-4	B-5	B-6	
a) In off-position, between the terminals which are electrically connected together when the circuit-breaker is in the closed position	176	240	180	≥ 2 MΩ
b) in off-position, between each pole in turn and the others connected together	232	320	260	≥ 2 MΩ
c) in on-position, between all poles connected together and the frame	660	710	690	≥ 5 MΩ
Supplementary information:N/A				

TABLE: Impact Resistance 1P;C63;Icn=4500A			P
Impacts per surface	Surface tested	Impact energy (Nm)	Comments
2 blows	Operating means	150g*9,8N/kg*10cm	No damage
4 blows	Lateral side of the sample	150g*9,8N/kg*10cm	No damage
4 blows	Between lateral side and operating means	150g*9,8N/kg*10cm	No damage
Supplementary information:N/A			

TABLE: Impact Resistance 4P;C63;Icn=4500A			P
Impacts per surface	Surface tested	Impact energy (Nm)	Comments
2 blows	Operating means	150g*9,8N/kg*10cm	No damage
4 blows	Lateral side of the sample	150g*9,8N/kg*10cm	No damage

4 blows	Between lateral side and operating means	150g*9,8N/kg*10cm	No damage
Supplementary information:N/A			

TABLE: Clearance And Creepage Distance Measurements 1P;C63;Icn=4500A						P
clearance cl and creepage distance dcr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	required dcr (mm)	dcr (mm)
between live parts (of the main circuits) which are separated when the CB is in off position	4000V	500V	4	4,07	5	5,31
between live parts of different polarity	4000V	500V	3	-	5	-
between live parts and accessible surfaces of operating means	4000V	500V	3	14,2	5	20,7
between live parts and surface on which the base is mounted	4000V	500V	3	6,94	5	6,94
between live parts and screws or other means for fixing the circuit breaker	4000V	500V	3	6,94	5	6,94
between live parts and other accessible metal parts	4000V	500V	3	14,2	5	20,7
Supplementary information:N/A						

TABLE: Clearance And Creepage Distance Measurements 4P;C63;Icn=4500A						P
clearance cl and creepage distance dcr at/of:	Up (V)	U r.m.s. (V)	Required cl (mm)	cl (mm)	required dcr (mm)	dcr (mm)
between live parts (of the main circuits) which are separated when the CB is in off position	4000V	500V	4	4,07	5	5,31
between live parts of different polarity	4000V	500V	3	11,2	5	11,2
between live parts and accessible surfaces of operating means	4000V	500V	3	14,2	5	20,7
between live parts and surface on which the base is mounted	4000V	500V	3	6,94	5	6,94
between live parts and screws or other means for fixing the circuit breaker	4000V	500V	3	6,94	5	6,94

between live parts and other accessible metal parts	4000V	500V	3	14,2	5	20,7
Supplementary information:N/A						

TABLE: Ball Pressure Test of Thermoplastics 1P;C63;Icn=4500A				P
Allowed impression diameter (mm) : ≤ 2 mm				—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure	-	125	1,0	
Current-carrying	-	125	1,0	
Operating meanings	-	70	0,8	
Fixing meanings	-	70	0,8	
Supplementary information:N/A				

TABLE: Ball Pressure Test of Thermoplastics 4P;C63;Icn=4500A				P
Allowed impression diameter (mm) : ≤ 2 mm				—
Object/ Part No./ Material	Manufacturer/ trademark	Test temperature (°C)	Impression diameter (mm)	
Enclosure	-	125	1,0	
Current-carrying	-	125	1,0	
Operating meanings	-	70	0,8	
Fixing meanings	-	70	0,8	
Supplementary information:N/A				

TABLE: Needle- flame test (NFT)	N/A
--	------------

TABLE : Glow wire test 1P;C63;Icn=4500A		P
Parts made of insulating material necessary to retain current-carrying parts in position: test temperature 960 °C		
No visible flame and no sustained glowing		N/A
Flames and glowing extinguish within 30 s		P
No ignition of the tissue paper		P
Parts of insulating material not necessary to retain current-carrying parts in position, even though in contact with them: test temperature 650 °C		
No visible flame and no sustained glowing		P
Flames and glowing extinguish within 30 s		N/A

	No ignition of the tissue paper	P
--	---------------------------------	---

	TABLE : Glow wire test 2P;C63;Icn=4500A	P
	Parts made of insulating material necessary to retain current-carrying parts in position: test temperature 960 °C	
	No visible flame and no sustained glowing	N/A
	Flames and glowing extinguish within 30 s	P
	No ignition of the tissue paper	P
	Parts of insulating material not necessary to retain current-carrying parts in position, even though in contact with them: test temperature 650 °C	
	No visible flame and no sustained glowing	P
	Flames and glowing extinguish within 30 s	N/A
	No ignition of the tissue paper	P

	TABLE : Glow wire test 4P;C63;Icn=4500A	P
	Parts made of insulating material necessary to retain current-carrying parts in position: test temperature 960 °C	
	No visible flame and no sustained glowing	N/A
	Flames and glowing extinguish within 30 s	P
	No ignition of the tissue paper	P
	Parts of insulating material not necessary to retain current-carrying parts in position, even though in contact with them: test temperature 650 °C	
	No visible flame and no sustained glowing	P
	Flames and glowing extinguish within 30 s	N/A
	No ignition of the tissue paper	P

	TABLE: Threaded Part Torque Test 1P;C63;Icn=4500A			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Screw	4,9	II	2,0	
Supplementary information:N/A				

	TABLE: Threaded Part Torque Test 4P;C63;Icn=4500A			P
Threaded part identification	Diameter of thread (mm)	Column number (I, II, or III)	Applied torque (Nm)	
Screw	4,9	II	2,0	
Supplementary information:N/A				

IEC60898_1E ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

Annex n° 1

ATTACHMENT TO TEST REPORT IEC 60898-1 EUROPEAN GROUP DIFFERENCES AND NATIONAL DIFFERENCES Circuit-breakers for over current protection for household and similar installations Part 1 - Circuit-breakers for a.c. operation		
Differences according to.....: EN 60898-1:2019		
	CENELEC COMMON MODIFICATIONS (EN)	P
Test item particulars:	MCB	P
Type of circuit-breaker	YCB6H-63 (References list see page 10-12)	P
Energy limiting class	<input checked="" type="checkbox"/> Class 1 <input type="checkbox"/> Class 3	P
Value of rated operational voltage (Ue) and number of poles	<input type="checkbox"/> 230 V <input type="checkbox"/> 240 V <input type="checkbox"/> 230/400V <input checked="" type="checkbox"/> 240/415V for 1P <input type="checkbox"/> 400V <input checked="" type="checkbox"/> 415V for 2P/3P/4P <input checked="" type="checkbox"/> 1 P <input type="checkbox"/> 1 P + N <input checked="" type="checkbox"/> 2 P <input checked="" type="checkbox"/> 3 P <input type="checkbox"/> 3 P + N <input checked="" type="checkbox"/> 4 P	P
Value of rated short-circuit capacities above 10 000 A up to and including 25 000 A	<input type="checkbox"/> 15000 A <input type="checkbox"/> 20000 A <input type="checkbox"/> 25000 A	N/A
Rated impulse withstand voltage (Uimp)	4 kV	P

IEC60898_1E ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	Sequence A ₁ 1P;C63;Icn=4500A	A ₁₋₁	
6	MARKING AND OTHER INFORMATION		--
6.1	Standard marking:		--
	f) Rated short circuit capacity in A within a rectangle, without symbol "A"	4500 with a rectangle	P
	h) calibration temperature, if different from 30°C		N/A
	m) Energy limiting class in a square in accordance with 1		N/A
	Icn and the energy limiting class, when applied, marked both on the device and combined		P
	Irrespective of type (B, C or D), the manufacturer published in his literature the I ₂ t characteristic	C	P
	For rail mounting circuit-breakers, appropriate rail(s) are indicated in manufacturer's documentation.		P
6.2	Additional marking		--
	Additional marking to other standards (EN or IEC or other) is allowed under the follow conditions:		--
	- the circuit-breaker complies with all the requirements of the additional standard;		--
	- the relevant standard to which the additional marking refers is indicated adjacent to this marking and is clearly differentiated or separated from the standard marking according to cl. 6.1		--
6.3	Guidance table for marking		--
	Each CB shall be marked in a durable manner with all or, for small apparatus, according the guidance table for marking.		P
9.6	Test of protection against electric shock		--
	In case of knock-outs the test finger is applied with a force of 10 N		P

	Sequence A ₁ 4P;C63;Icn=4500A	A ₁₋₂	
6	MARKING AND OTHER INFORMATION		--
6.1	Standard marking:		--
	f) Rated short circuit capacity in A within a rectangle, without symbol "A"	4500 with a rectangle	P

IEC60898_1E ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	h) calibration temperature, if different from 30°C		N/A
	m) Energy limiting class in a square in accordance with 1		N/A
	Icon and the energy limiting class, when applied, marked both on the device and combined		P
	Irrespective of type (B, C or D), the manufacturer published in his literature the I2t characteristic	C	P
	For rail mounting circuit-breakers, appropriate rail(s) are indicated in manufacturer's documentation.		P
6.2	Additional marking		--
	Additional marking to other standards (EN or IEC or other) is allowed under the follow conditions:		--
	- the circuit-breaker complies with all the requirements of the additional standard;		--
	- the relevant standard to which the additional marking refers is indicated adjacent to this marking and is clearly differentiated or separated from the standard marking according to cl. 6.1		--
6.3	Guidance table for marking		--
	Each CB shall be marked in a durable manner with all or, for small apparatus, according the guidance table for marking.		P
9.6	Test of protection against electric shock		--
	In case of knock-outs the test finger is applied with a force of 10 N		P

Short-circuit tests			
9.12	General		--
9.12.2	Value of the power frequency recovery voltage shall be equal to 110 % of the rated voltage.		P
9.12.3	Tolerances on test quantities		--
	Voltage (including recovery voltage) : 0, -5%		P
9.12.9.1	A circuit-breaker tested according to 9.12.9.2 needs not be tested according to 9.12.9.3.		P
9.12.9.2	In case no information is available, two grids, one above and one below the circuit-breaker, shall be used.		N/A

IEC60898_1E ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	For test currents up to and including 3000 A, the distance "a" is 35 mm.		P
--	--	--	---

	Sequence C ₁ 1P;C63;Icn=4500A	C ₁₋₁	C ₁₋₂	C ₁₋₃	
9.11.1	For single-pole circuit-breakers rated 230/400 V the test is made at 230 V.				P
9.11.3	Dielectric strength reduced to 900 V		1500V		P
	Sequence C₂ : Short-circuit test on circuit-breakers for use in IT systems				--
9.12.11.2.2	Test voltage 105 % of 400 V	435 V			P

	Sequence C ₁ 4P;C63;Icn=4500A	C ₁₋₄	C ₁₋₅	C ₁₋₆	
9.11.1	For single-pole circuit-breakers rated 230/400 V the test is made at 230 V.				N/A
9.11.3	Dielectric strength reduced to 900 V		1500V		P
	Sequence C₂ : Short-circuit test on circuit-breakers for use in IT systems				--
9.12.11.2.2	Test voltage 105 % of 400 V	435 V			P

	Sequence D 3 samples 1P;C63;Icn=4500A				
9.10	Tests: D ₀	D ₀ +D ₁₋₁	D ₀ +D ₁₋₂	D ₀ +D ₁₋₃	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3I _n (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)				N/A
	- 0,1 s ≤ t ≤ 90 s (> 32A)				N/A
9.10.2.2	Test current 2,55 I _n (A) starting from cold for:	A			N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5 I _n (A), starting from cold	315A			P
	Opening time:	[s]	[s]	[s]	--

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

	- 0,1 s ≤ t ≤ 15 s (≤ 32A)	-	-	-	N/A
	- 0,1 s ≤ t ≤ 30 s (> 32A)	1	1	1	P
9.10.2.2	Test current 2,55 In (A) starting from cold for:	160,7A			P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	25	19	30	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 3 samples 4P;C63;Icn=4500A				
9.10	Tests: D ₀	D ₀ +D ₁₋₄	D ₀ +D ₁₋₅	D ₀ +D ₁₋₆	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)				N/A
	- 0,1 s ≤ t ≤ 90 s (> 32A)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	A			N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5 In (A), starting from cold	315A			P
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 15 s (≤ 32A)	-	-	-	N/A

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

	- 0,1 s ≤ t ≤ 30 s (> 32A)	1	1	1	P
9.10.2.2	Test current 2,55 In (A) starting from cold for:	160,7A			P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	33	28	23	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;C2;Icn=4500A 1P;C4;Icn=4500A				
9.10	Tests: Do	Do-1	Do-2	-	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)				N/A
	- 0,1 s ≤ t ≤ 90 s (> 32A)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5 In (A), starting from cold	10,0A	20,0A	-	P
	Opening time:	[s]	[s]	[s]	--

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

	- 0,1 s ≤ t ≤ 15 s (≤ 32A)	1	1	-	P
	- 0,1 s ≤ t ≤ 30 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	5,10A	10,2A	-	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	25	25	-	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;C6;Icn=4500A 1P;C10;Icn=4500A 1P;C16;Icn=4500A				
9.10	Tests: Do	Do-3	Do-4	Do-5	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)				N/A
	- 0,1 s ≤ t ≤ 90 s (> 32A)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5 In (A), starting from cold	30A	50A	80A	P

IEC60898_1E ATTACHMENT

Clause	Requirement + Test	Result - Remark			Verdict
--------	--------------------	-----------------	--	--	---------

	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 15 s (≤ 32A)	1	1	1	P
	- 0,1 s ≤ t ≤ 30 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	15,3A	25,5A	40,8A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	18	23	19	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;C20;Icn=4500A 1P;C25;Icn=4500A 1P;C32;Icn=4500A				
9.10	Tests: Do	Do-6	Do-7	Do-8	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3In (A), starting from cold	-	-	-	N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)	-	-	-	N/A
	- 0,1 s ≤ t ≤ 90 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	-	-	-	N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

	Test current 5 In (A), starting from cold	100A	125A	160A	P
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 15 s (≤ 32A)	1	1	1	P
	- 0,1 s ≤ t ≤ 30 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	51,0A	63,8A	81,6A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	28	28	24	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;C40;Icn=4500A 1P;C50;Icn=4500A 1P;C63; Icn=4500A				
9.10	Tests: Do	Do-9	Do-10	Do-11	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input type="checkbox"/> For circuit-breakers of the B – Type				N/A
	Test current 3In (A), starting from cold	-	-	-	N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)	-	-	-	N/A
	- 0,1 s ≤ t ≤ 90 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	-	-	-	N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	-	-	-	N/A

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

9.10.3.3	<input checked="" type="checkbox"/> For circuit-breakers of the C – Type				P
	Test current 5 In (A), starting from cold	200A	250A	315A	P
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 15 s (≤ 32A)	-	-	-	N/A
	- 0,1 s ≤ t ≤ 30 s (> 32A)	1	1	1	P
9.10.2.2	Test current 2,55 In (A) starting from cold for:	102A	127,5A	160,7A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)	-	-	-	N/A
	- 120 s (> 32 A)	18	33	25	P
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;B2;Icn=4500A 1P;B4;Icn=4500A				
9.10	Tests: Do	-	Do-12	Do-13	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current 3In (A), starting from cold	-	6A	12A	P
	Opening time:	[s]	[s]	[s]	P
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)	-	10	9	P
	- 0,1 s ≤ t ≤ 90 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	-	5,10A	10,2A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	N/A
	- 60 s (≤ 32 A)	-	24	22	P
	- 120 s (> 32 A)	-	-	-	N/A

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current 5 In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 15 s (≤ 32A)				N/A
	- 0,1 s ≤ t ≤ 30 s (> 32A)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;B6;Icn=4500A 1P;B10;Icn=4500A 1P;B16;Icn=4500A				
9.10	Tests: Do	Do-14	Do-15	Do-16	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current 3In (A), starting from cold	18A	30A	48A	P
	Opening time:	[s]	[s]	[s]	P
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)	11	8	11	P
	- 0,1 s ≤ t ≤ 90 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	15,3A	25,5A	40,8A	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	P
	- 60 s (≤ 32 A)	27	25	26	P

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

	- 120 s (> 32 A)	-	-	-	N/A
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current 5 In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s ≤ t ≤ 15 s (≤ 32A)				N/A
	- 0,1 s ≤ t ≤ 30 s (> 32A)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s ≤ t ≤ 4 s (10 A < In ≤ 32 A)				N/A
	- 0,1 s ≤ t ≤ 8 s (10 A ≥ In > 32A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;B20;Icn=4500A 1P;B25;Icn=4500A 1P;B32;Icn=4500A				
9.10	Tests: Do	Do-17	Do-18	Do-19	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current 3In (A), starting from cold	60A	75A	96A	P
	Opening time:	[s]	[s]	[s]	P
	- 0,1 s ≤ t ≤ 45 s (≤ 32A)	9	8	12	P
	- 0,1 s ≤ t ≤ 90 s (> 32A)	-	-	-	N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:	51,0A	63,8A	81,6	P
	opening time not less than 1 s or more than	[s]	[s]	[s]	P

IEC60898_1E ATTACHMENT					
Clause	Requirement + Test	Result - Remark			Verdict

	- 60 s (≤ 32 A)	25	28	25	P
	- 120 s (> 32 A)	-	-	-	N/A
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current 5 In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s $\leq t \leq 15$ s (≤ 32 A)				N/A
	- 0,1 s $\leq t \leq 30$ s (> 32 A)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s $\leq t \leq 4$ s (10 A $< I_n \leq 32$ A)				N/A
	- 0,1 s $\leq t \leq 8$ s (10 A $\geq I_n > 32$ A)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s (≤ 32 A)				N/A
	- 120 s (> 32 A)				N/A

	Sequence D 1 samples 1P;B40;Icn=4500A 1P;B50;Icn=4500A 1P;B63;Icn=4500A				
9.10	Tests: Do	Do-20	Do-21	Do-22	P
	If the tests are made in a test chamber, it is made in still air; the volume of the chamber has no influence on the test results.				P
9.10.3.2	<input checked="" type="checkbox"/> For circuit-breakers of the B – Type				P
	Test current 3In (A), starting from cold	120A	150A	189A	P
	Opening time:	[s]	[s]	[s]	P
	- 0,1 s $\leq t \leq 45$ s (≤ 32 A)	-	-	-	N/A
	- 0,1 s $\leq t \leq 90$ s (> 32 A)	10	11	10	P
9.10.2.2	Test current 2,55 In (A) starting from cold for:	102A	127,5A	160,7A	P

IEC60898_1E ATTACHMENT

Clause	Requirement + Test	Result - Remark	Verdict
--------	--------------------	-----------------	---------

	opening time not less than 1 s or more than	[s]	[s]	[s]	P
	- 60 s ($\leq 32 A$)	-	-	-	N/A
	- 120 s ($> 32 A$)	21	24	26	P
9.10.3.3	<input type="checkbox"/> For circuit-breakers of the C – Type				N/A
	Test current 5 In (A), starting from cold				N/A
	Opening time:	[s]	[s]	[s]	--
	- 0,1 s $\leq t \leq 15$ s ($\leq 32A$)				N/A
	- 0,1 s $\leq t \leq 30$ s ($> 32A$)				N/A
9.10.2.2	Test current 2,55 In (A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s ($\leq 32 A$)				N/A
	- 120 s ($> 32 A$)				N/A
9.10.3.4	<input type="checkbox"/> For circuit-breakers of the D – Type				N/A
	Test current 10 In (A), starting from cold	A			N/A
	Opening time:	[s]	[s]	[s]	N/A
	- 0,1 s $\leq t \leq 4$ s ($10 A < I_n \leq 32 A$)				N/A
	- 0,1 s $\leq t \leq 8$ s ($10 A \geq I_n > 32A$)				N/A
	Test current 20 In (A) starting from cold				N/A
	Tripping less than 0,1 s				N/A
9.10.2.2	Test current 2,55 In(A) starting from cold for:				N/A
	opening time not less than 1 s or more than	[s]	[s]	[s]	--
	- 60 s ($\leq 32 A$)				N/A
	- 120 s ($> 32 A$)				N/A


IEC60898_1E ATTACHMENT			
Clause	Requirement + Test	Result - Remark	Verdict

	Annex ZC		--
	EN 60898-1		--
	Special national conditions		--
	For the countries in which the relevant special national conditions apply these provisions are normative, for other countries they are informative.		--
J.1	Austria, Czech Republic, Netherlands, Norway and Switzerland		--
	The upper limit of current for use of screwless terminals is 16 A		N/A
J.3.3	Austria, Belgium, Denmark, France, Germany, Italy, Portugal, Spain and Sweden		--
	Only universal screwless type terminals are accepted.		N/A
K.1	Belgium, Italy and Spain		--
	The use of circuit-breakers with flat quick-connect terminations for rated currents up to and including 20 A is accepted.		N/A
K.8.2.2	Belgium, Italy and Spain		--
	The use for rated currents up to and including 20 A is accepted		N/A


Photographs

1P/C63


Over View

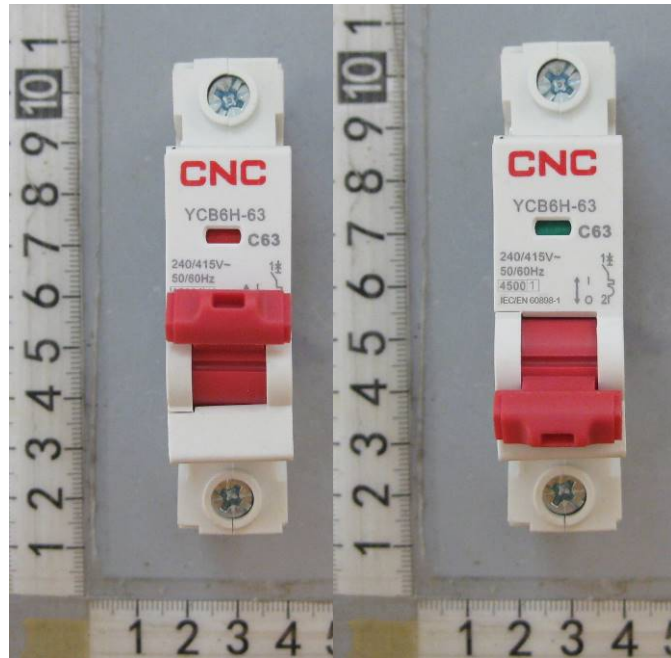


Side View

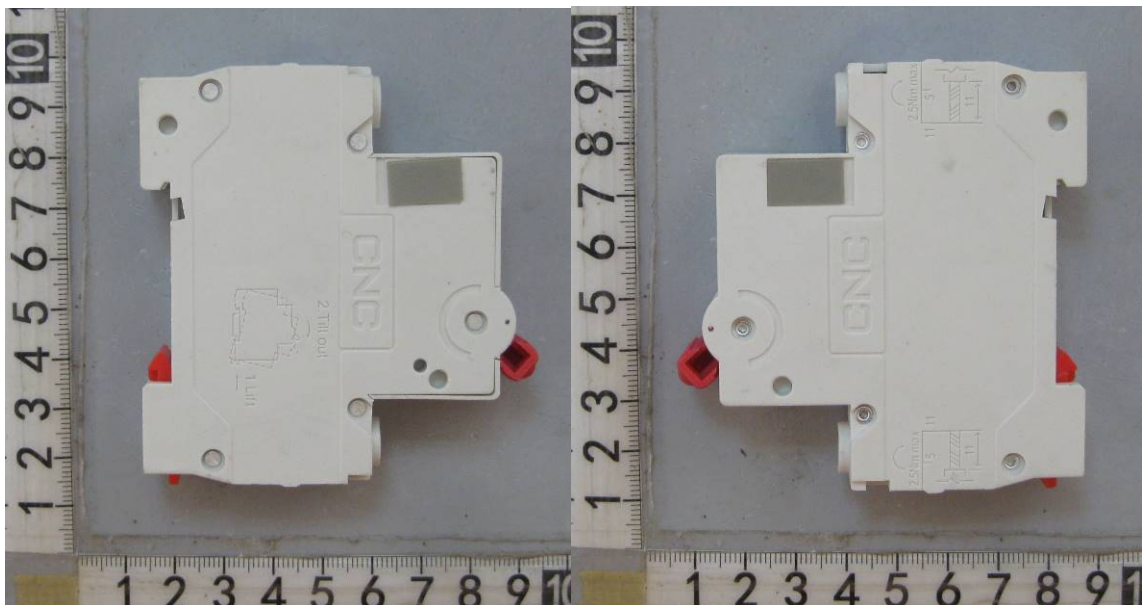


Side View

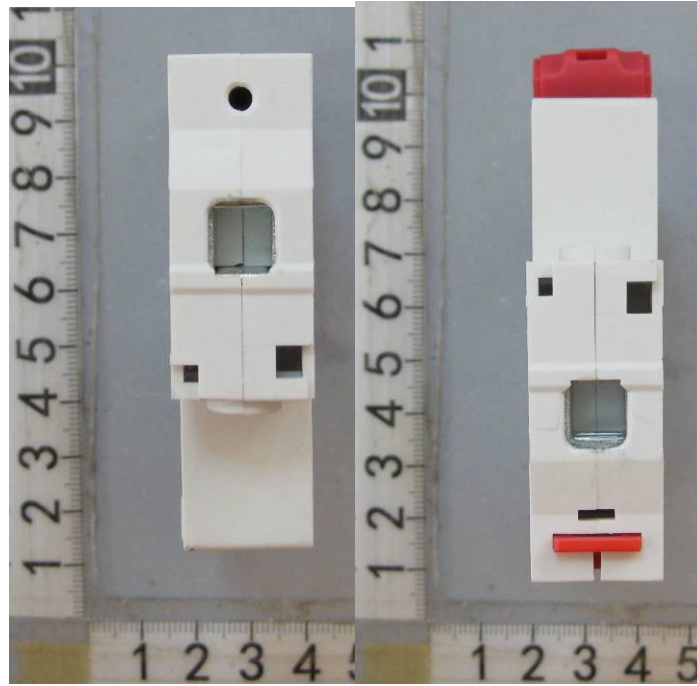

Bottom View

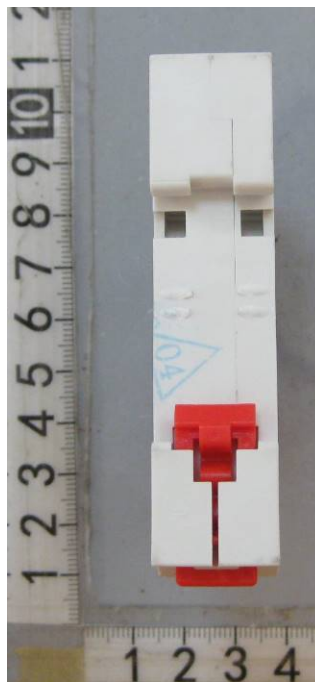


Inside View

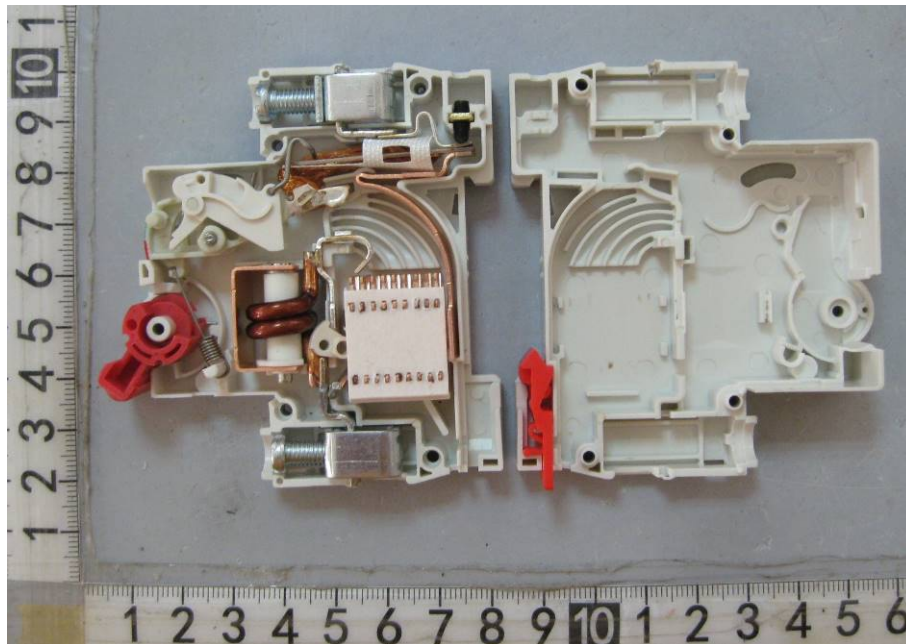


4P/C63


Over View

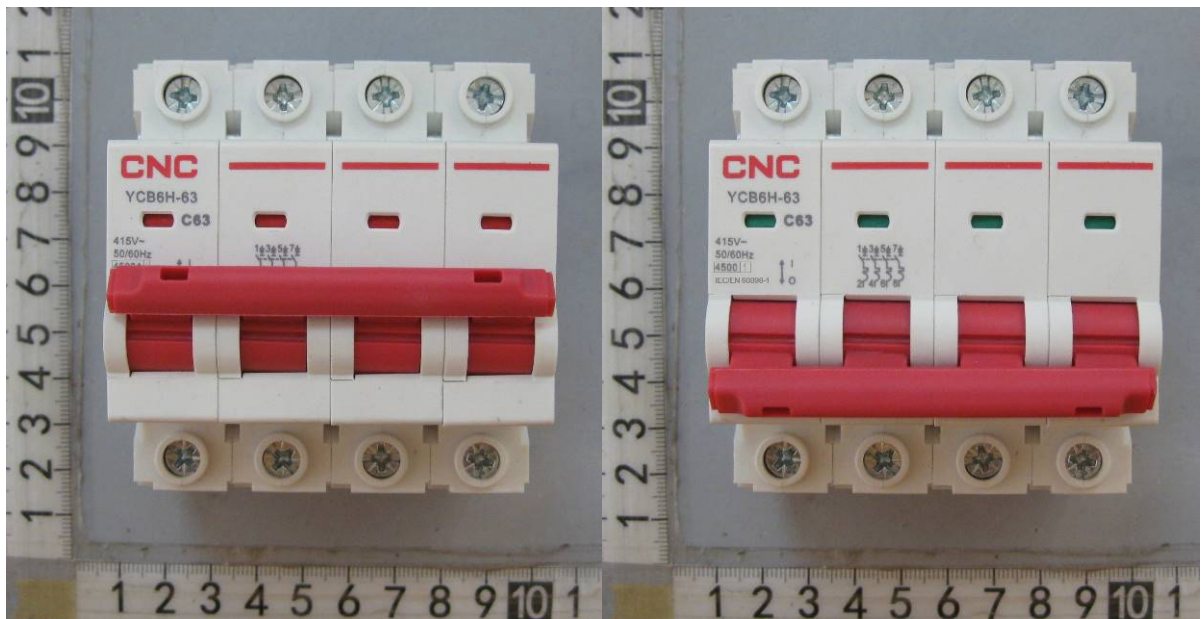


Side View

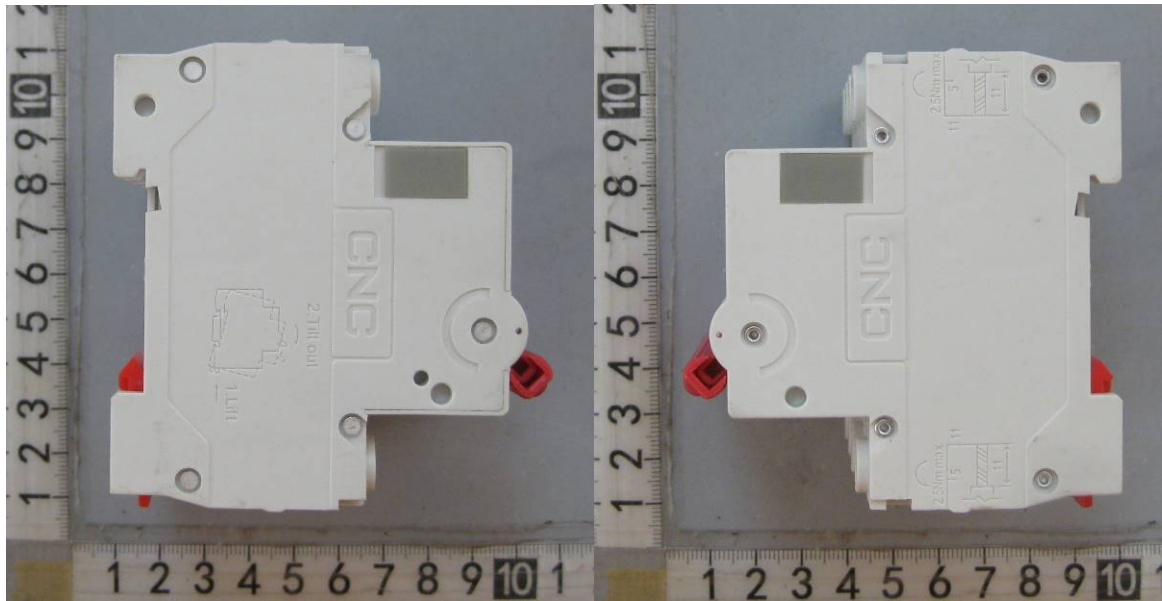

Side View

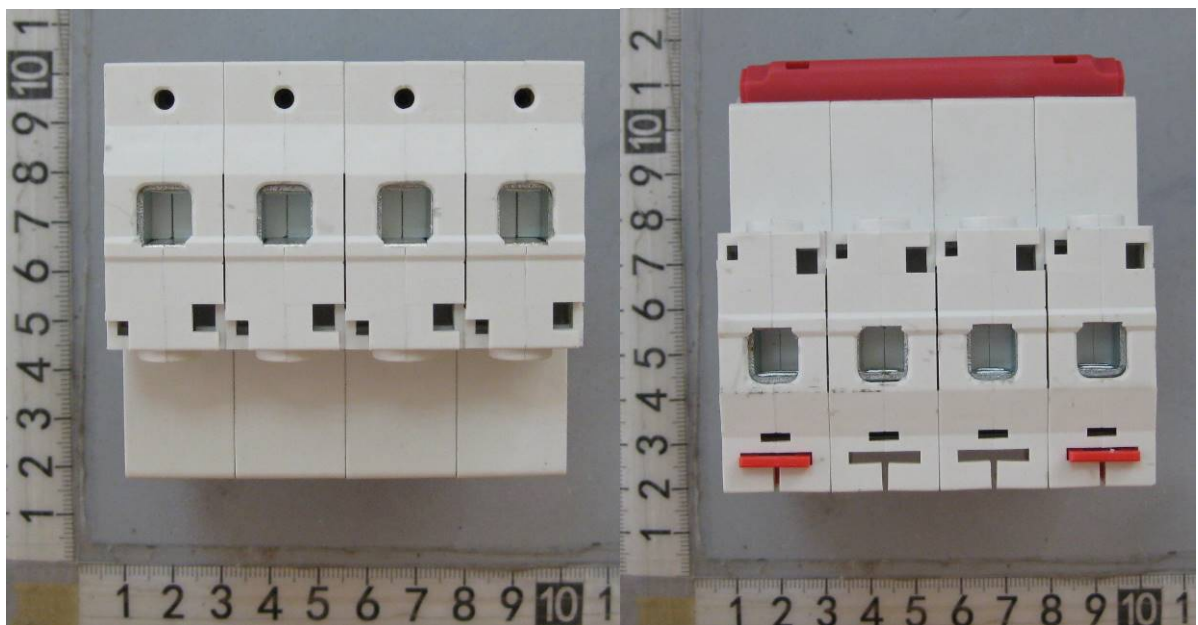

Bottom View

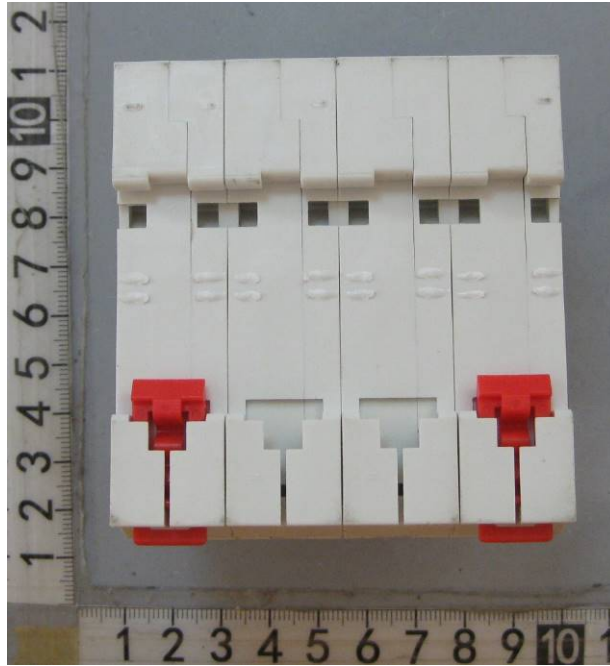

Inside View

