


Table 4

Rated current	In A	conductor cross section S mm ²
6		1
10		1.5
16, 20		2.5
25		4
32		6

4 Overall and mounting dimensions

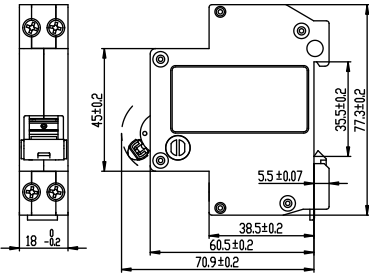

-06-

5 Ordering instruction

5.1 When ordering, the customer shall indicate the product type, tripping curve, rated current, number of poles, accessories and quantity of the circuit breaker. For example: YCB6N-32 C25 880pcs.

5.2 Customers can negotiate separately if you have special requirements.

-07-

CNC
ELECTRIC

CERTIFICATE

Product Model: YCB6N-32
Standard: IEC 60898-1
Inspector: CNC 001
Production date: Printed on the product or package.
This product is qualified according to the delivery inspection

CNC ELECTRIC

Tel: 0086-577-61989999 Fax: 0086-577-61891122
www.cncele.com E-mail: cncele@cncele.com



YCB6N-32 series

⚠ Before installing and using this product, please read this manual carefully and pay more attention to safety.

YCB6N-32
Miniature Circuit Breaker
OPERATION INSTRUCTION
Standard: IEC 60898-1

YCB6N series
Miniature Circuit Breaker Instruction

General

YCB6N-32 miniature circuit breaker(circuit breaker) is applicable to the circuit with AC 50Hz/60Hz, rated voltage up to 230V, and rated current up to 32A for overload protection and short circuit protection. This product can be applied to various places such as industrial, commercial, tall buildings, and residential houses.

Standard: IEC60898-1

2. Operating conditions

- 2.1 Ambient air temperature -5℃~+40℃
- 2.2 Altitude: ≤2000m.

-01-

2.3 Air conditions: At mounting site, relative humidity not exceed 50% at the maximum temperature of +40℃. For the wettest month, the maximum relative humidity averaged shall be 90% while the lowest temperature averaged in that month is +20℃, special measures should be taken to occurrence of condensation.

2.4 The installation category is II, III.

2.5 The circuit breaker shall be installed on DIN rail EN 60715 (35mm), which shall meet the A1.1 TH 35-7.5 steel mounting rail requirements.


2.6 Pollution grade: 2

2.7 Mounting conditions: inclination between mounting plane and vertical plane not exceed ±5°.

-02-

2.8 The product should locate in the places where there are no obvious impact and shake.

3.1 Type designation

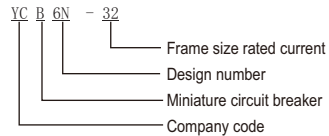

3.2 The basic specifications and main technical parameters of the circuit breaker are shown in Table 1; The overcurrent protection characteristics are shown in Table 2.

Table 1

Us	Number of poles	Rated frequency Hz	Rated voltage Ue	Rated Current In	Thermo-magnetic release characteristic	Rated short circuit breaking capacity Icn
500V	1P+N(1P with protection)	50/60	AC230V	6A,10A,16A,20A,25A,32A	B,C type	3kA

-03-

Test Type	Test current	Initial status	Time limit for tripping or not tripping	Expected result	Testing environment temperature	Remarks
						current increase steadily within 3s
a	1.13In	cold state	t≤1h	Not tripping	-30℃~+35℃	Turn on the power supply by closing the auxiliary switch Turn on the power supply by closing the auxiliary switch
b	1.45In	Right after test number a	t<1h	Tripping		
c	2.55In	cold state	1s<t<60s (In≤32A)	Tripping		
d	3In 5In	cold state	t≤0.1s	Not tripping		
e	5In 10In	cold state	t<0.1s	Tripping		

Table 2

Note: The terminology "Cold state" means that the test is performed at the base calibration temperature with no load prior to the test.

-04-

3.3 Mechanical and Electrical life shown in Table 3

Item	Times	Operation Frequency times/h	Rated current(A)
Electrical life	4000	240	1~32
Mechanical life	10000	240	1~32

3.4 Wire connection

Before installation, check whether technical parameter of the circuit breaker is in conformity with user's requirement. The conductor of power supply shall be connected to the up terminal of circuit breaker. During installation, the tightening torque is max 2N•m. The sectional area of connecting wire can refer to Table 4.

-05-