

## Relay

# AH3-B Time Relay


### Features

It's used to definite time.  
It contains front-surface,  
back-surface, connecting sockets,  
LED indicator and action display interface.



AH3-B

### Model Meaning

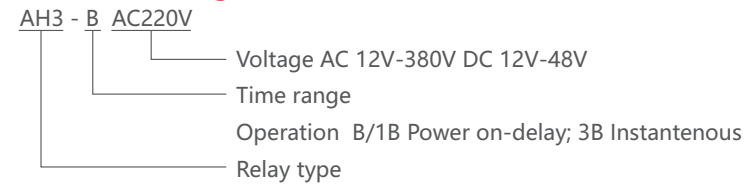

### Specification

Item No.	Data
Voltage	DC12V-48V AC12V-380V50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 <sup>7</sup> Elec:10 <sup>3</sup>
Weight	≈100g
Installing Holing Size	40×50mm

### Time Range

AH3-A	1S~10M
AH3-B	3S~30M
AH3-C	6S~60M
AH3-D	1M~10H
AH3-E	3M~30H

### Dimension

