

Relay

ASTP-Y Time Relay


Features

Used for control of time order
With front-surface and back-surface
connecting sockets
LED pilot, display action state



ASTP-Y

Model Meaning

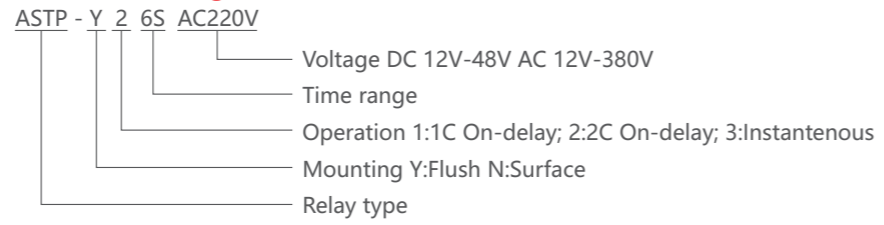

Specification

Item No.	Data
Voltage	DC12V-48V AC12V-380V 50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈220g
Installing Holing Size	50×62mm

Time Range

Rated time	Time range	Rated time	Time range
1s	0.1s~1s	3m	0.1m~3m
2s	0.1s~2s	6m	0.3m~6m
3s	0.1s~3s	12m	0.6m~12m
6s	0.2s~6s	30m	1m~30m
12s	0.6s~12s	60m	2m~60S
60s	2.0s~60s	3h	0.1h~3h
2m	5.0s~1m	6h	0.2h~6h

Dimension

