

Relay

ATDV-Y Time Relay


Features

Used for control of time order
With front-surface and back-surface
connecting sockets
LED pilot, display action state



ATDV-Y

Model Meaning

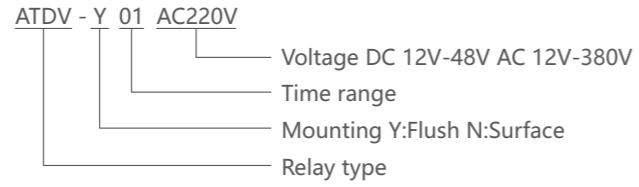

Specification

Item No.	Data
Voltage	DC12V-48V AC12V-380V 50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈210g
Installing Holing Size	50×62mm

Time Range

Type	Time range	Type	Time range
ATDV-Y/N-01	6S*6S	ATDV-Y/N-07	60M*6M
ATDV-Y/N-02	6S*60S	ATDV-Y/N-08	60M*60M
ATDV-Y/N-03	60S*6S	ATDV-Y/N-09	6H*6H
ATDV-Y/N-04	60S*60S	ATDV-Y/N-10	6H*12H
ATDV-Y/N-05	6M*6M	ATDV-Y/N-11	12H*6H
ATDV-Y/N-06	6M*60M	ATDV-Y/N-12	12H*12H

Dimension

