


## CJX2-F-N Mechanical Interlocking Contactor



### Specifications

Type	Rated operation current(Ie)(A)	Rated thermal current(Ith)(A)	Rated operational power in category AC-3 (kW)		Rated insulation voltage(Ui)(V)
			380V	660V	
CJX2-F115N	115	200	55	80	1000
CJX2-F150N	150	200	75	100	1000
CJX2-F185N	185	275	90	110	1000
CJX2-F225N	225	275	110	129	1000
CJX2-F265N	265	315	132	160	1000
CJX2-F330N	330	380	160	220	1000
CJX2-F400N	400	450	200	280	1000
CJX2-F500N	500	630	250	335	1000
CJX2-F630N	630	800	335	450	1000

### Outline and installation dimensions

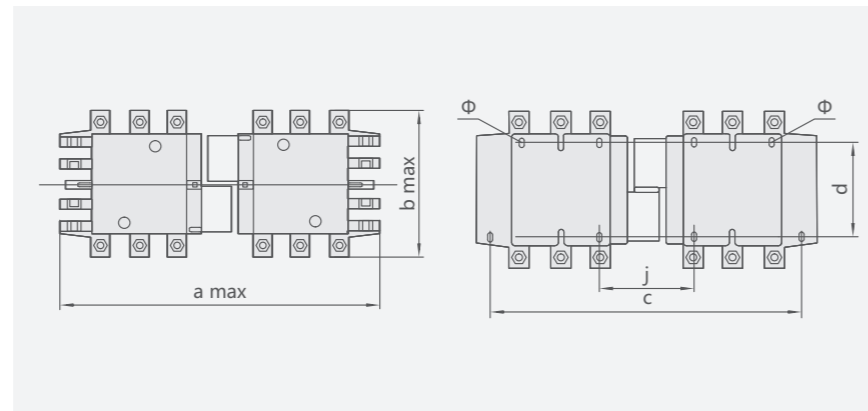

Type	Pole	a max	b max	c	d	j
CJX2-F115N	3P	350	163	330	110~120	71
	4P	425	208	370		108
CJX2-F150N	3P	350	171	330		71
	4P	425	211	370		111
CJX2-F185N	3P	350	174	330		78
	4P	430	223	370		118
CJX2-F225N	3P	350	197	330		78
	4P	430	243	370		118
CJX2-F265N	3P	450	203	428		109
	4P	546	249	485		157
CJX2-F330N	3P	450	206	428		124
	4P	546	251	485		172
CJX2-F400N	3P	485	206	460	170~180	157
	4P	595	251	485		157
CJX2-F500N	3P	485	238	460	156	
CJX2-F630N	3P	650	304	625	180~190	139
	4P	810	364	785		139
CJX2-F800N	3P	650	304	625	139	