

CJX2-K AC Contactor


CJX2-K AC Contactor

General

CJX2-K series AC Contactor is suitable for using in the circuits the rated voltage up to 660V AC 50Hz or 60Hz, rated current up to 12A in AC-3 using category , for making & breaking, frequently starting & controlling the AC motor. The contactor is produced according to IEC 60947-4.



Type designation

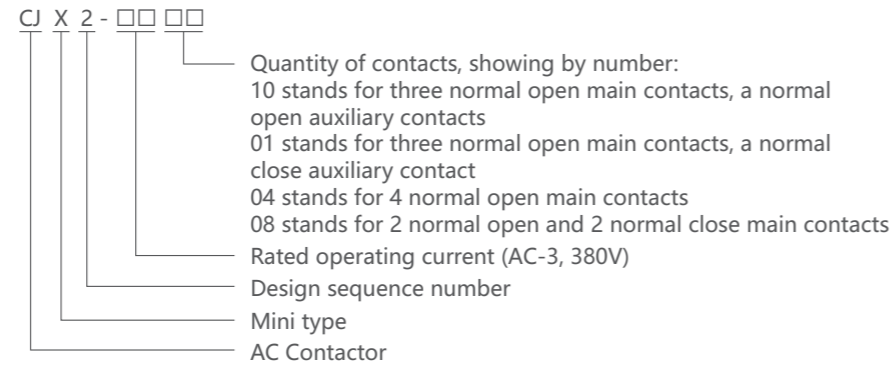

Specifications

Type		CJX2-K06	CJX2-K09	CJX2-K12
Rated operation voltage (Ue)	V	660	660	660
Rated thermal current (Ith)	A	20	20	20
Rated operation current (Ie)	AC-3, 380V	A	6	9
	AC-3, 660V	A	2.6	3.5
Max. power of 3 phase motor controlled	AC-3, 220V	kW	1.5	2.2
	AC-3, 380V	kW	2.2	4
	AC-3, 660V	kW	3	5.5
Electrical life	AC-3	10000 t	100	
	AC-4	10000 t	20	
Mechanical life		10000 t	1000	
Operation frequency	AC-3	t/h	1200	
	AC-4	t/h	300	
Matching fuse type			NT00-16	
Wiring capacity		mm ²	1.5	
Coil				
Control power voltage (Us)	AC	V	24, 36, 48, 110, 220, 380	
Allowed control	Close	V	85%~110%Us	
	Open	V	20%~75%Us(AC)	
Coil power	Loss power	W	2	

