

## CJX2s-N Mechanical Interlocking Contactor




### Specifications


Type	Rated operation current (Ie)(A)	Rated thermal current (Ith)(A)	Rated operational power in category AC-3 (kW)	
			380V	660V
CJX2s-09N	9	20	4	5.5
CJX2s-12N	12	20	5.5	7.5
CJX2s-18N	18	32	7.5	10
CJX2s-25N	25	40	11	15
CJX2s-32N	32	50	15	18.5
CJX2s-38N	38	50	15	18.5
CJX2s-40N	40	50	18.5	30
CJX2s-50N	50	60	22	33
CJX2s-65N	65	80	30	37
CJX2s-80N	80	95	37	45
CJX2s-95N	95	95	45	55

### Outline and installation dimensions

CJX2s-09~38N

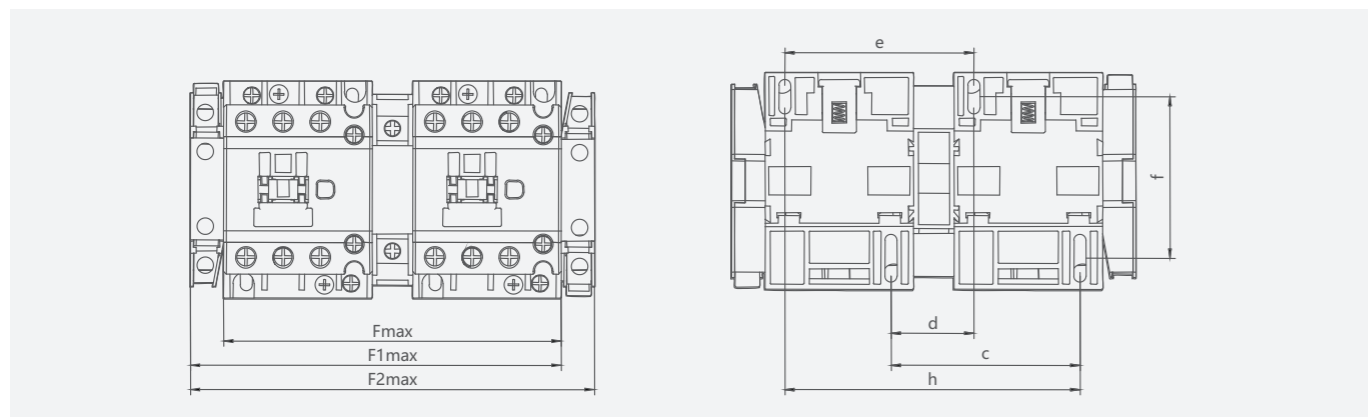

CJX2s-40~95N

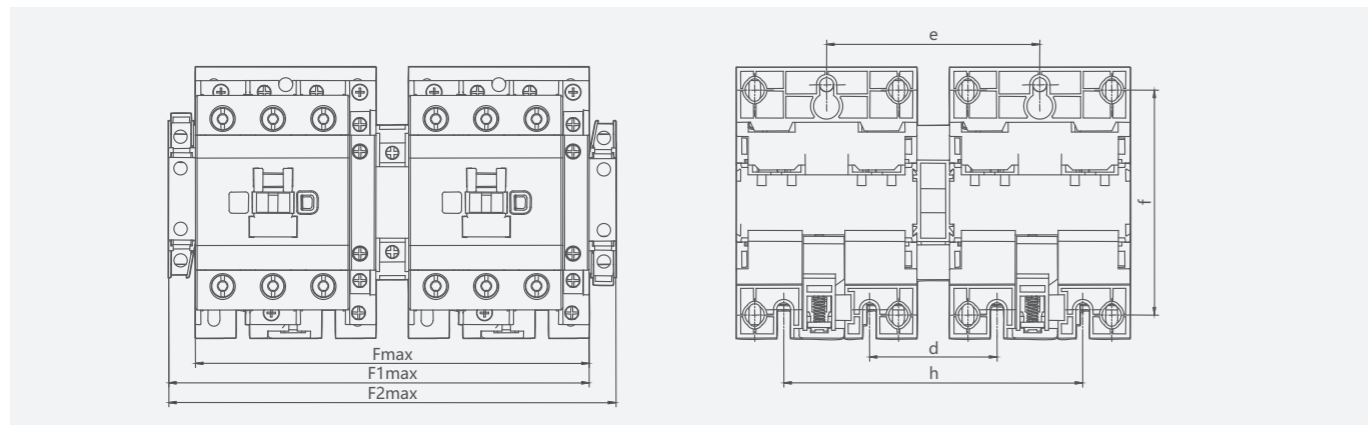

Type	Fmax	F1max	F2max	c	d	e	f	h
CJX2s-09N, 12N, 18N	107	120	131	60	25	60	50/60	95
CJX2s-25N, 32N, 38N	129	142	153	71	31.5	71	50/60	111.5
CJX2s-40N, 50N, 65N	163	180	193	-	50	90	100/110	130
CJX2s-80N, 95N	186	202	215	-	60	100	100/110	140