


Relay

DH48J,DH48S-S Time Relay



DH48J

Model Meaning

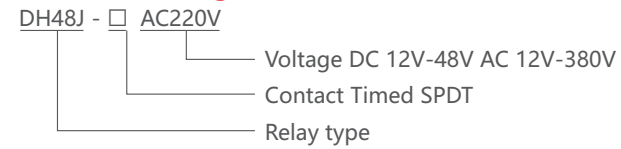


Specification

Item No.	Data
Voltage	DC12V-48V AC12V-380V 50HZ
Counting Method	accumulation
Counting Range	1-9999 (×1×10×100) Contacts input or photoelectric switch input
Input Signal	Multiple dial switch pre-setting
Counting Speed	30 times/S
Contact Capacity	AC220V 3A; DC28V 3A
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:107 Elec:103
Weight	≈100g



DH48S-S

Model Meaning



Specification

Item No.	Data
Voltage	DC12V-48V AC 24V-380V50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A 220V AC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈150g
Installing Holing Size	45×45mm

Time Range

0.1S~99H