

Insulated Receptacle/Buttet Disconnects



Insulated Receptacle Disconnects

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=10A; Material: Brass



Model	Material thickness	Size(mm)					Color
		bφ	Bφ	Dφ	F	L	
FRD1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	Red

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=15A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bφ	Bφ	Dφ	F	L	
FRD2-156	0.4	4.0	6.3	2.3	14.0	24.5	Blue
FRD2-195	0.4	5.0	7.0	2.3	14.0	24.5	

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=24A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bφ	Bφ	Dφ	F	L	
FRD5.5-195	0.4	5.0	7.3	3.4	14.0	29.5	Yellow

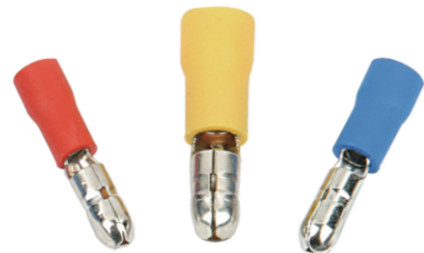

Insulated Buttet Disconnects

Conductor cross-section: 0.5-1.5mm²; American Wire Gauge: 22-16;
Maximum current: I_{max}=10A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bφ	F	Dφ	H	L	
MPD1.25-156	0.4	4.0	6.3	1.7	13.0	24.5	Red

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=15A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bφ	F	Dφ	H	L	
MPD2-156	0.4	4.0	11.0	2.3	10.0	21.0	Blue
MPD2-195	0.4	5.0	11.0	2.3	10.0	21.0	

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=24A; Material: Brass

Model	Material thickness	Size(mm)					Color
		bφ	F	Dφ	H	L	
MPD5.5-195	0.4	5.0	12.0	3.4	13.0	25.0	Yellow

