

Relay

H3Y-4 Time Relay


Features

Used for control of time order
With front-surface and back-surface
connecting sockets
LED pilot, display action state



H3Y-4 (ST6P)

Model Meaning

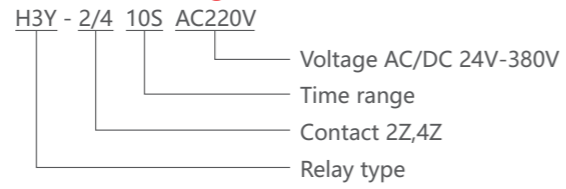

Specification

Item No.	Data
Voltage	DC12V-48V AC24V-380V 50HZ
Power expend	DC1.0W AC1.0VA
Control output	2Z 5A220VAC 4Z 3A220VAC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10°C~50°C
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈50g
Installing Holing Size	22×28mm

Time Range

Rated time	Time range	Rated time	Time range
0.5s	0.05S~0.5S	3m	0.05m~0.5m
1s	0.1S~1S	1m	0.1m~1m
5s	0.5S~5S	5m	0.5m~5m
10s	0.5S~10S	10m	0.5m~10m
30s	1.0S~30S	30m	1m~30m
60s	2.0S~60S	60m	2m~60S
120s	5.0S~120S	120m	0.1h~3h

Dimension

