

Relay


LY2,LY3,LY4 General-purpose Relay



LY2



LY3




LY4

Features

- Various relays,including LED
- 10A Transfer Contacts
- 1Z,2Z,3Z,4Z Contact operating form
- Various Terminals Available
- Transparent dust-proof cover
- Various mounting types
- Various sockets available
- Including LED,test button

Model Meaning

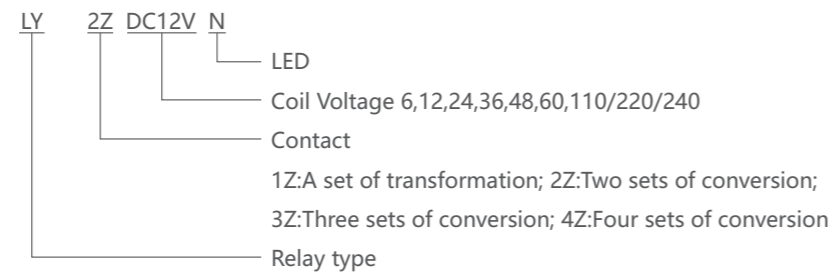

Contact Rating

Contact Rating	1Z	2Z,3Z,4Z
Contact Resistance	50mΩ(1A 6VDC)	50mΩ(1A 6VDC)
Contact capacity	10A250VAC/28VDC	10A 250VAC/28VDC

Specification

Insulation Resistance	500MΩ
Dielectric Strength	BCC 1000VAC 1min
	BOC 1500VAC 1min
	CCC 1500VAC 1min
Operate Time	25ms/25ms
Terminal Type	PCD and Socket

Coil Rating

Nominal Coil Power: 0.9W/1.2VA

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%
5	4.0	0.50	30
6	4.8	0.60	40
12	9.6	1.20	160
24	19.2	2.40	640
48	38.4	4.80	2500
110	88.0	11.0	12100