

Relay

MY2,MY3,MY4 General-purpose Relay



MY2



MY3




MY4

Features

- Various relays, including LED, test button
- With 2Z, 4Z contact forms
- With various terminal types
- Gilt contact types
- Transparent dust-proof cover
- Various mounting types
- Various sockets available

Model Meaning

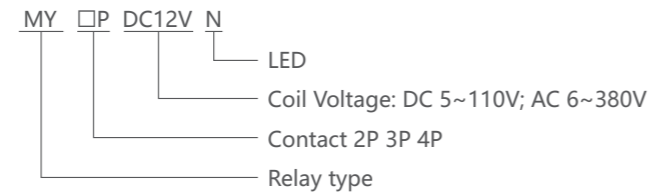

Contact Rating

Contact Rating	2Z, 3Z	4Z
Contact Resistance	50mΩ(1A 6VDC)	50mΩ(1A 6VDC)
Contact capacity	5A/220VAC	3A/220VAC 30VDC

Specification

Insulation Resistance	500MΩ, 500VDC
Dielectric Strength	BCC 1000VAC 1min
	BOC 1500VAC 1min
	CCC 1500VAC 1min
Operate Time	20ms/25ms
Terminal Type	PCB and Socket

Coil Rating

Nominal Coil Power: 0.9W/1.2VA

Coil Versions

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω:±10%
5	4.0	0.50	30
6	4.8	0.60	40
12	9.6	1.20	160
24	19.2	2.40	640
48	38.4	4.80	2500
110	88.0	11.0	12100