

Fuse

NT Low Voltage Fuse


NT Low Voltage Fuse

Application


NT low voltage H.R.C. fuse features light in weight, small in size, low in power loss and high in breaking capacity. This product has been widely used in overload and short circuit protection of electric installation. This product conforms to IEC 60269 standards with all of the rating at the world advanced level.

Specifications


Type	Fuse link				Fuse base		
	Rated current (A)	Rated voltage (V)	Rated power loss (W)	Weight (kg)	Type	Rated current	Weight (kg)
NT00C	2	500,690	0.41	0.15	Sist 101	160	0.2
	4		0.62				
	6		0.81				
	10		1.08				
	16		1.60				
	20		1.81				
	25		2.31				
	32		3.07				
	36		3.17				
	40		4.05				
	50		4.25				
	63		4.70				
NT00	4	500,600	0.67	0.15	Sist 101	160	0.2
	6		0.89				
	10		1.14				
	16		1.65				
	20		1.94				
	25		2.50				
	32		3.32				
	36		3.56				
	40		4.30				
	50		4.5				
	63		4.6				
	80		6				
100	7.3						
125	7.6						
160	9.6						
NT0	6	500,600	1.03	0.2	Sist 160	160	0.32
	10		1.42				
	16		2.45				
	20		2.36				
	25		2.7				
	32		3.74				
	35		4.3				
	40		4.7				
	50		5.5				
	63		6.9				
	80		7.6				
	100		8.9				
125	10.1						
160	15.2						



NT00C



NT00




NT0

Fuse


NT Low Voltage Fuse

Specifications


Type	Fuse link				Fuse base		
	Rated current (A)	Rated voltage (V)	Rated power loss (W)	Weight (kg)	Type	Rated current	Weight (kg)
NT1	80	500,600	6.2	0.36	Sist 201	250	0.8
	100		7.5				
	125		10.2				
	160		13				
	200		15.2				
	224		16.8				
NT2	250	600	18.3	0.65	Sist 401	400	1.2
	300		21				
	315		19.2				
	355		24.5				
	400		26				
	425		28.9				
NT3	315	500,600	21.7	0.85	Sist 601	630	1.5
	355		22.7				
	400		26.8				
	425		28.9				
	500		32				
	630		40.3				
NT4	800	380	62	1.95	Sist 1001	1000	3.45
	1000		75				

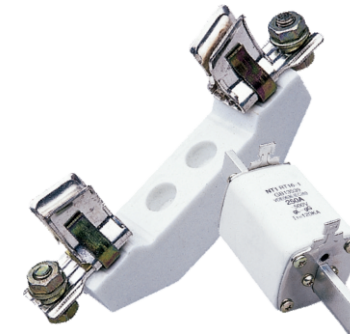

NT1

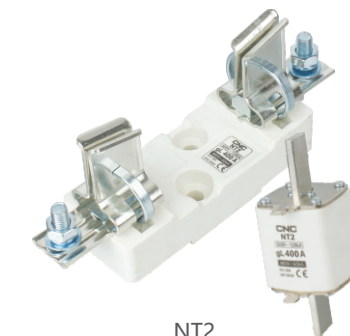

NT2

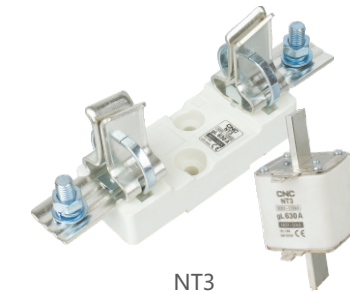

NT3



NT4

B