

## PG Nylon Cable Gland




1. Thread spec.: PG
2. Material: Parts A, C, E are made of UL approved nylon PA66, parts B and D are made of Nitrile butadiene rubber(NBR).
3. Working temperature: -40°C to 100°C in static state, instantaneous heat resistance up to 120°C; -20°C to 80°C in dynamic state, instantaneous heat resistance up to 100 °C.
4. Characteristics: Special design of clamping die and rubber part, large range in clamping cable, ultra-strong stretching resistance, waterproof, dustproof, and high ability to resist salt, acid, alkali, alcohol, grease and general solvent.

### Color selected



### Structural Drawing

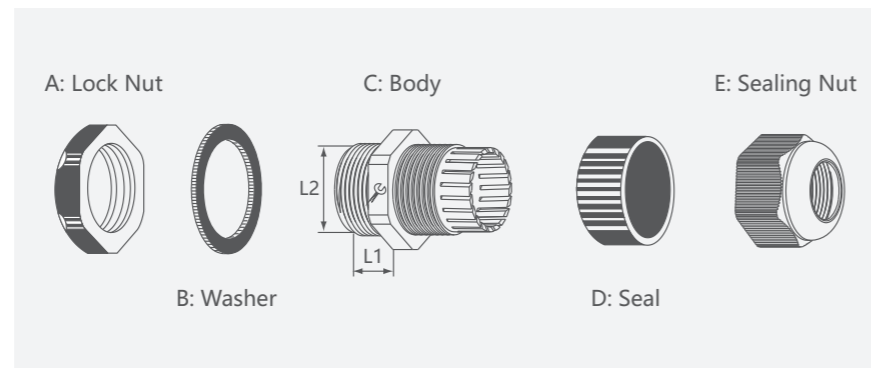

### Technical Parameters

Model	Thread size	Cable range (mm)	Thread O.D. L2(mm)	Thread length L1(mm)	Spanner size A & E(mm)
PG7	PG7	3~6.5	12.5	9	18/16
PG9	PG9	4~8	15.2	9	22/19
PG11	PG11	5~10	18.6	9	24/22
PG13.5	PG13.5	6~11	20.4	10	27/24
PG16	PG16	10~13	22.5	10	30/27
PG19	PG19	12~15	24	10	30/28
PG21	PG21	13~18	28.3	12	35/33
PG25	PG25	16~21	30	12	37/35
PG29	PG29	18~25	37	12	45/42
PG36	PG36	22~32	47	15	58/52
PG42	PG42	32~38	54	18	62/58
PG48	PG48	37~44	59.3	18	70/64
PG63	PG63	42~50	71	30	83/77

