

Electrical Accessories


Insulated Spade Terminals



Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV1.25-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.3	Red
SV1.25-3.5	#6	3.7mm	5.7	21.2	6.5			
SVM1.25-4	#8	4.3mm	7.2	21.2	6.5			
SVL1.25-4	#8	4.3mm	8.1	21.2	6.5			
SVS1.25-5	#10	5.3mm	8.1	21.2	6.5			
SVL1.25-5	#10	5.3mm	9.5	21.2	6.5			
SVS1.25-6	1/4	6.5mm	9.5	21.2	6.5			
SVL1.25-6	1/4	6.5mm	12.0	27.2	11.0			

Conductor cross-section: 1.5-2.5mm²; American Wire Gauge: 16-14;
Maximum current: I_{max}=27A

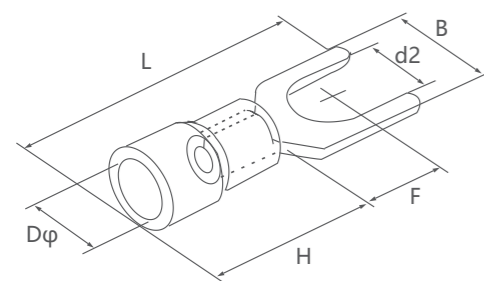

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV2-3	#4	3.2mm	5.7	21.2	6.5	10.0	4.9	Blue
SVS2-3.5	#6	3.7mm	5.7	21.2	6.5			
SVS2-4	#8	4.3mm	6.4	21.2	6.5			
SVM2-4	#8	4.3mm	7.2	21.2	6.5			
SVL2-4	#8	4.3mm	8.1	21.2	6.5			
SVS2-5	#10	5.3mm	8.1	21.2	6.5			
SVL2-5	#10	5.3mm	9.5	21.2	6.5			
SVS2-6	1/4	6.5mm	9.5	21.2	6.5			
SVL2-6	1/4	6.5mm	12.0	27.2	11.0			

Conductor cross-section: 2.5-4mm²; American Wire Gauge: 14-12;
Maximum current: I_{max}=37A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV3.5-4	#8	4.3mm	8.0	24.8	7.0	12.5	6.2	Black
SV3.5-5	#10	5.3mm	8.0	24.8	7.0			
SV3.5-6	1/4	6.5mm	12.0	28.0	12.1			

Conductor cross-section: 4-6mm²; American Wire Gauge: 12-10;
Maximum current: I_{max}=48A

Model	US-made bolt number	Size						Color
		Bolt hole diameter	B	L	F	H	DΦ	
		d2	mm	mm	mm	mm	mm	
SV5.5-3	#6	3.7mm	8.3	25.2	7.5	12.5	6.7	Yellow
SVS5.5-4	#8	4.3mm	8.3	25.2	7.5			
SVL5.5-4	#8	4.3mm	9.0	25.2	7.5			
SV5.5-5	#10	5.3mm	9.0	25.2	7.5			
SVS5.5-6	1/4	6.5mm	9.0	25.2	7.5			
SVL5.5-6	1/4	6.5mm	12.0	31.2	12.0			
SV5.5-8	5/16	8.4mm	14.0	30.0	11.5			