

**Modular DIN Rail**  
**YCB7-63N MCB**



**General**

The YCB7-63N series miniature circuit breaker are suitable for overcurrent protection building line facilities and similar purposes in AC 50/60Hz, rated voltage 230V/400V, rated current up to 63A circuits. They have isolation, overload, and short circuit protection functions, and can also be used for infrequent operation and switching of lines under normal circumstances. Circuit breakers are suitable for various places such as industry, commerce, high-rise buildings, and residential buildings.  
Standard: IEC/EN 60898-1.

**Selection**

YCB7	63	N	1P	C	16
Model	Shell grade current	Breaking capacity	Number of poles	Tripping characteristics	Rated current
Miniature circuit breaker	63	N:6kA	1P	B	1
					2
					4
					6
					10
					16
			2P	C	20
					25
					32
					40
					50
					63
3P	D	80			
4P					

Note: This product can be assembled with accessories (YCB7-63N OF/SD/OF+SD/MX/MVMN/MX+OF, etc)

**Modular DIN Rail**  
**YCB7-63N MCB**


**Technical data**

Type	Standard		IEC/EN 60898-1	
Comprehensive data	Function		Overload, Short circuit, Isolation	
	Number of poles		1P,2P,3P,4P	
	Rated current I <sub>n</sub>	A	1-63A	
	Rated frequency	Hz	50/60Hz	
Electrical features	Rated voltage U <sub>e</sub>	V	230/400	
	Rated insulation voltage U <sub>i</sub>	V	500	
	Rated breaking capacity I <sub>cn</sub>	A	6000	
	Rated impulse withstand voltage U <sub>imp</sub> (1.2/50)	kA	4	
	Pollution degree		2	
	Use category		II, III	
	Trip type		Thermal magnetic release	
	Thermal magnetic tripping characteristics		B,C,D	
	Electrical and mechanical accessories		□	
	Mechanical features	Mechanical life	Times	20000
Electrical life		Times	10000	
Protection degree			IP20	
Antihumidity and heat resistance			The relative humidity of the air is not more than 50% when the ambient air temperature is +40°C, and it can have a higher relative humidity at a lower temperature	
Reference ambient temperature		°C	30	
Ambient temperature		°C	-5°C-+40°C, the average value of 24h does not exceed +35°C	
Height		m	Not exceeding 2000	
Terminal connection type			Cable/Pin-type busbar	
Installation	Maximum wire capacity	Terminal size top/bottom for cable	mm <sup>2</sup>	25
			AWG	18-3
	Terminal size top/bottom for busbar	mm <sup>2</sup>	25	
		AWG	18-3	
	Torque	N*m	2	
		l <sub>n</sub> -lbs	18	
Tool	18	Phillips screwdriver or flat-blade screwdriver		
Installation		On DIN rail EN 60715 (35mm) by means of fast clip device		
Wiring method		From top or bottom		

Modular DIN Rail  
**YCB7-63N MCB**

**A**

**Overall and mounting dimensions(mm)**

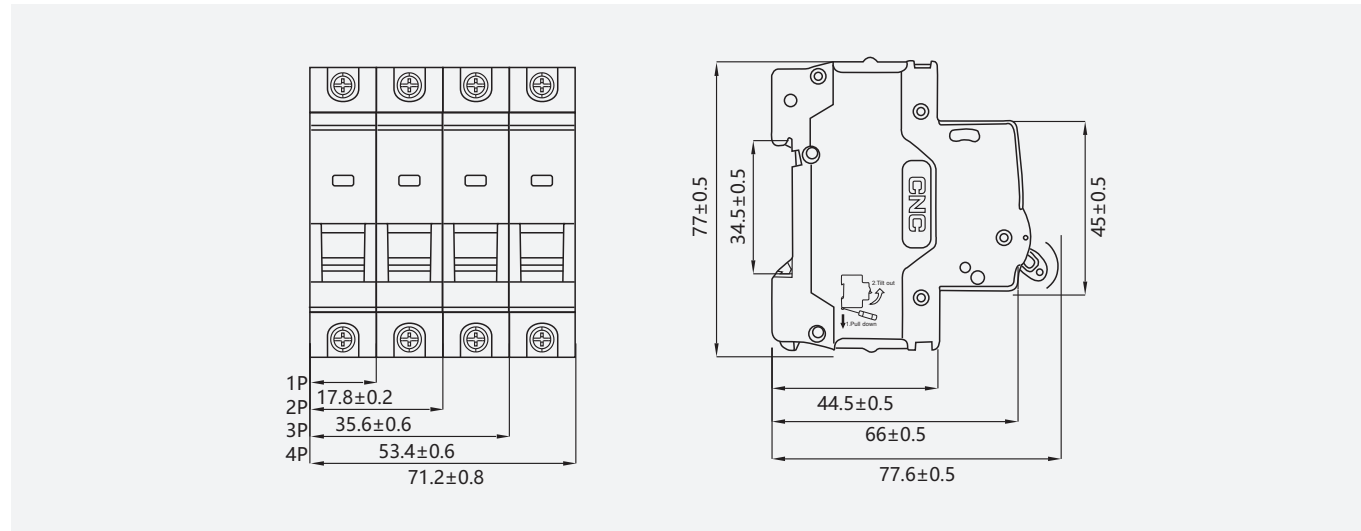

**Selection**

Type	Test current	Tripping time	Expected result	Type	Test current	Tripping time	Expected result
B,C,D	1.13I <sub>n</sub>	t ≤ 1h (I <sub>n</sub> ≤ 63A)	Not tripping	B	3I <sub>n</sub>	t ≤ 0.1s	Not tripping
	1.13I <sub>n</sub>	t ≤ 2h (I <sub>n</sub> > 63A)		C	5I <sub>n</sub>	t ≤ 0.1s	
B,C,D	1.45I <sub>n</sub>	t < 1h (I <sub>n</sub> ≤ 63A)	Tripping	D	10I <sub>n</sub>	t ≤ 0.1s	
	1.45I <sub>n</sub>	t < 2h (I <sub>n</sub> > 63A)		B	5I <sub>n</sub>	t < 0.1s	Tripping
B,C,D	2.55I <sub>n</sub>	1s < t < 60s (I <sub>n</sub> ≤ 32A)	Tripping	C	10I <sub>n</sub>	t < 0.1s	
	2.55I <sub>n</sub>	1s < t < 120s (I <sub>n</sub> > 32A)		D	20I <sub>n</sub>	t < 0.1s	

**Curve**

